

- ZZ5 Shorting plug TP7 shall be raised to minimum height of 250mils above PCB
- ZZ4 These assemblies must comply with workmanship standards IPC-A-610 Class 2, unless otherwise specified.
- ZZ3 These assemblies must be clean and free from flux and all contaminants. Use of no clean flux is not acceptable.
- ZZ2 These assemblies are ESD sensitive. ESD precautions shall be observed.
- ZZ1 ■Install label in silkscreened box after final wash. Text shall be 8 pt font. Text shall be per the Label Table in the PDF schematic.

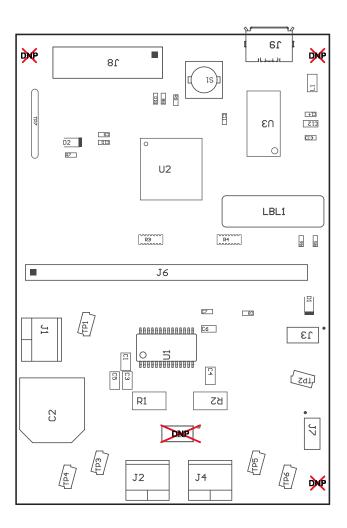

COMPONENTS MARKED 'DNP' SHOULD NOT BE POPULATED. ASSEMBLY VARIANT: 001

PCB VIEWED FROM TOP SIDE	BOARD #: MDBUO04	REV: A	SUN REU:	Not In VersionControl
	TID #: N/A			
PLOT NAME = Top Assembly Drawing	GENERATED : 7/13/2	015 8:37:30	PM	TEXAS INSTRUMENTS

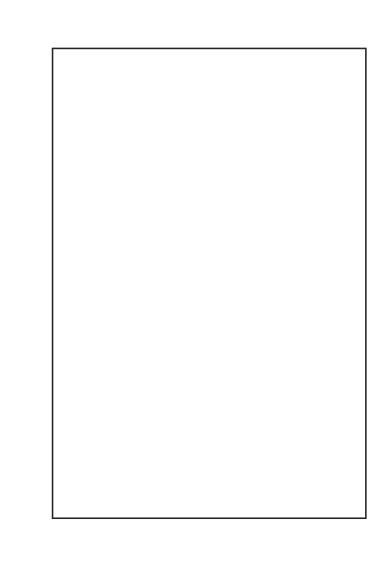

COMPONENTS MARKED 'DNP' SHOULD NOT BE POPULATED. ASSEMBLY VARIANT: 001

PCB VIEWED FROM BOTTOM SIDE	BOARD #: MDBUO04 REV: A	SVN REV: Not In VersionControl
	TID #: N/A	
PLOT NAME = Bottom Assembly Drawing	GENERATED : 7/13/2015 8:37:31	PM TEXAS INSTRUMENTS