2026

IRoC-U

ISRO Robotics Challenge - URSC

*Let's build a space robot*

# Proposal Report

For IRoC-U 2026

**by**


**Team Challengers**

**10950**


**December 2025**


**Sahyadri College of Engineering and Management, Mangaluru - 575009**

# INDEX


| | | |
|---|---|---|
| 1 | Description of ASCEND | 3 |
| 2 | System Architecture (an example) | 3 |
| 3 | Identification of components with their specifications | 4 |
| 4 | ASCEND Realization plan | 4 |
| 5 | Testing Plan | 5 |
| 6 | Brief of system specification | 5 |
| 7 | Overview of the emergency response system. | 6 |
| 8 | Project management | 6 |
| 9 | Novelty in the overall proposal | 7 |

# 1 Description of ASCEND

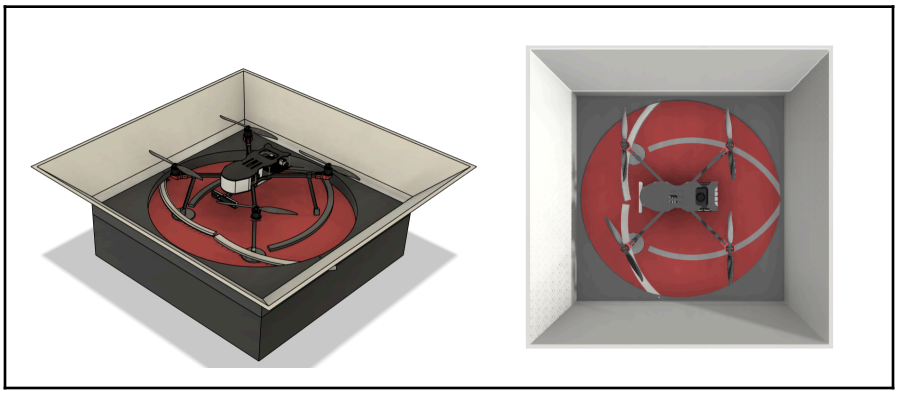

**ASCEND requires an autonomous micro-UAV to survey unknown terrain (Mars-like arena) without GNSS. The proposed ASCEND system for the IROC-26 Challenge is a co-designed aerial and ground system, consisting of a X-configuration quadcopter rotorcraft and an autonomous docking station. The system is developed to operate entirely in a GPS, GNSS, LPS, and external-marker-denied environment, relying on onboard sensing, state estimation, and mechanical interaction to achieve reliable ascent, landing, and docking.**

**A new rotorcraft platform has been designed to meet the specific operational requirements of the ASCEND task, including stable descent, precise attitude control, and mechanical compatibility with the docking interface. The docking station is designed as an active–passive hybrid system that assists post-landing alignment and enables secure positioning and data exchange.**

**We propose a quadcopter design for its simplicity and VTOL/hover capability. Fixed-wing aircraft have much longer endurance but cannot hover or maneuver in confined spaces, making multirotors preferable for detailed mapping. Among multirotors, a quadcopter balances payload and efficiency: it has fewer motors and lower cost/weight than a hexacopter, yet more lifting power than a tricopter. In fact, hexacopters can lift more than 2 kg of weight and survive 1–2 motor failures, whereas quadcopters typically carry only 0.5–2 kg and lose control if one motor fails. However, quadcopters also achieve longer flight times (more than 30 minutes for quadcopter versus approximately 15-20 minutes for hexacopter) and are widely used in research due to their structural simplicity, maintenance ease, and hover capability. These factors justify our quadcopter choice.**

**Key constraints include the 2 kg weight limit and GNSS denial. We design for total mass ≈1.8 kg and avoid GPS entirely. Onboard autonomy using vision/IMU-based SLAM and energy-efficient design ensure endurance while carrying necessary sensors (camera, range finder, IMU). Overall, the quadcopter offers the best trade-off of agility, payload, and simplicity for the ASCEND tasks.**

**Comparison of Rotorcraft Types:**

**Rotorcraft platforms generate lift through rotating blades and enable vertical take-off, hovering, and low-speed maneuvering. Various rotorcraft configurations were evaluated to identify the most suitable platform for the ASCEND mission requirements, which include autonomous navigation, visual sensing, and precision docking in a GPS-denied environment.**

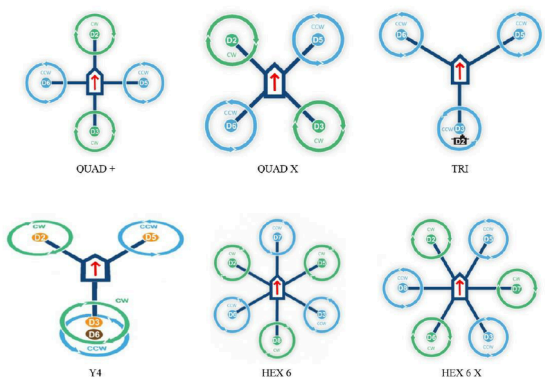


**After exploring several options such as Quadcopter, Hexacopter, and Octacopter, the X-configuration Quadcopter emerged as the best fit for the mission. It offers excellent**

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

**agility and maneuverability, which is crucial for navigating complex paths and tight spaces. Beyond its dynamic handling, the X-layout ensures a well-balanced center of gravity, enhancing overall stability and control.**

| | |
|---|---|
| <br>**Fig: Front View** | <br>**Fig: Top View** |
| <br>**Fig: Isometric View** | <br>**Fig: Side View** |

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

# 2 System Architecture (an example)

**The system architecture of ASCEND combines onboard sensing, high-level autonomy, and low-level flight control to enable reliable autonomous operation without external navigation aids. The architecture emphasizes modularity, real-time performance, and seamless sensor–controller integration.**

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

e

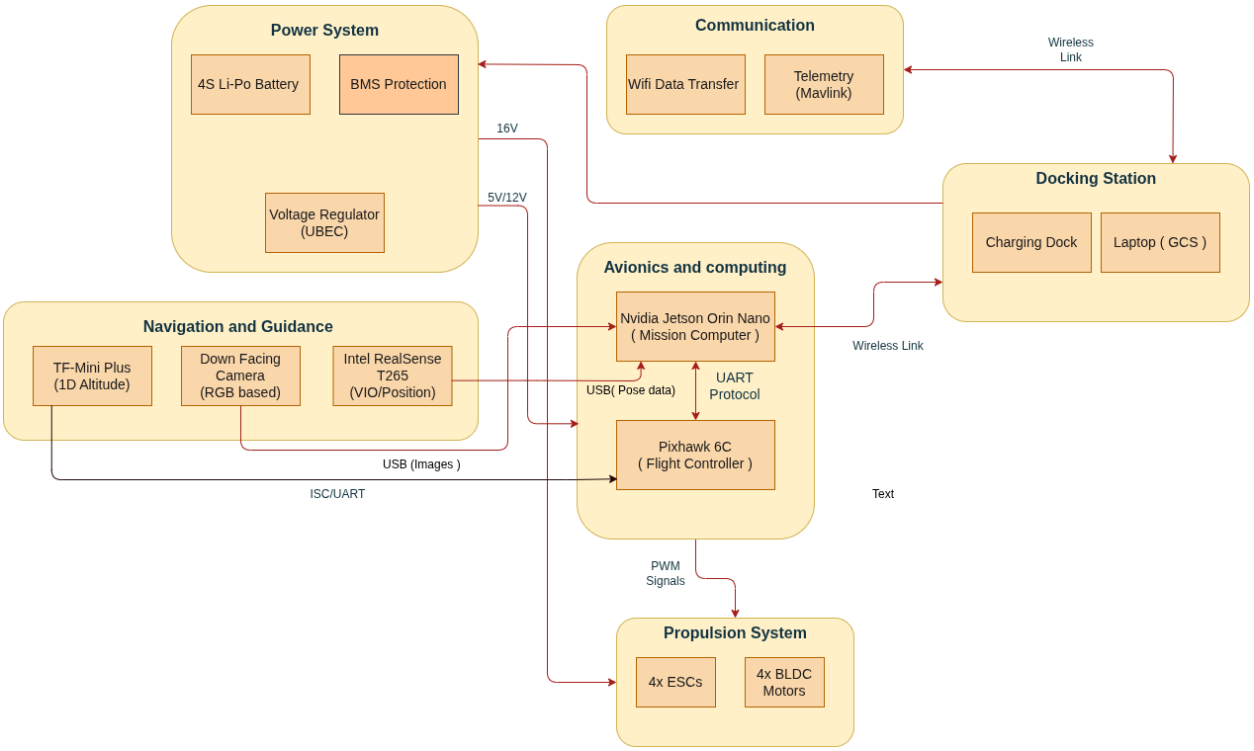


**Figure 2.1**

**The hardware design is centered around a dual-computer avionics stack, utilizing an Nvidia Jetson Orin Nano as the primary mission computer and a Pixhawk 6C for real-time flight control. Power management is handled by a 4S Li-Po battery system equipped with BMS protection, which distributes raw voltage to the**

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

**propulsion system's ESCs and motors while routing regulated 5V and 12V lines to the sensitive electronics. The navigation suite integrates multiple sensor modalities, including a TF-Mini Plus for 1D altitude precision, a down-facing RGB camera for visual data, and the Intel T265 for VIO-based positioning, all interfacing with the mission computer via USB or UART. Communication is maintained through dual links: a telemetry module handles MAVLink traffic for flight data, while a high-bandwidth WiFi link transfers data between the onboard computer and the docking station's Ground Control Station (GCS).**

## Software Architecture (ROS 2 Implementation)

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

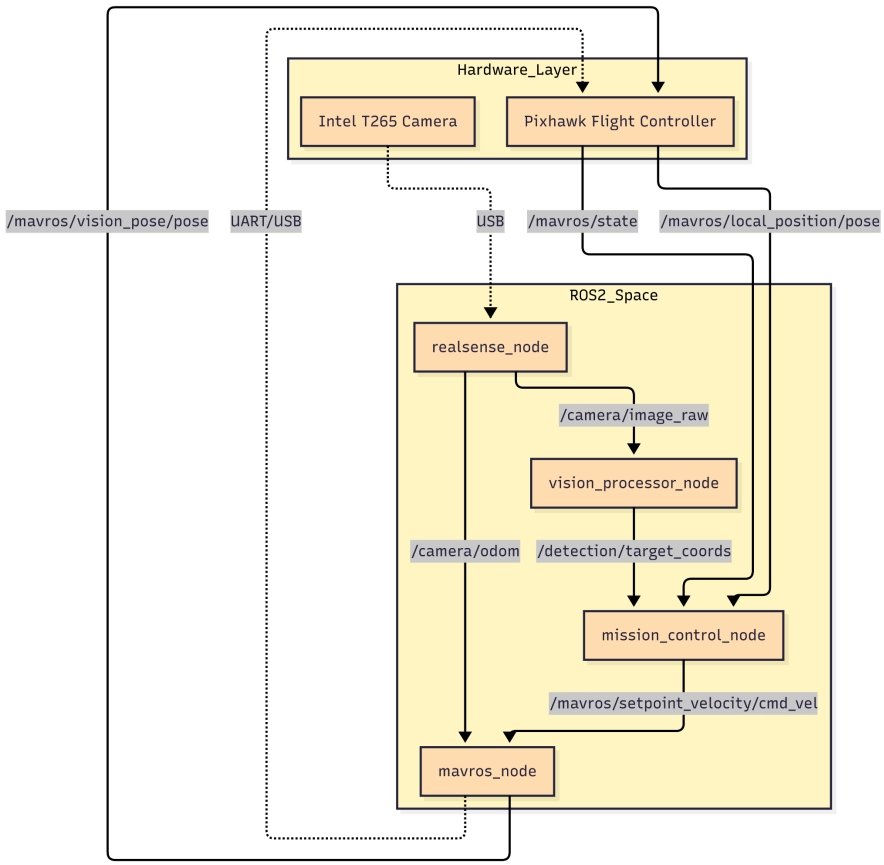


**Figure 2.2**

**The software stack is built on a ROS 2 framework designed to decouple low-level flight stabilization from**

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

**high-level perception and control logic. The architecture bridges the hardware layer—consisting of the Intel T265 and Pixhawk flight controller—with the application layer through a series of modular nodes. The realsense_node acts as the primary driver, ingesting raw data via USB and splitting it into two parallel streams: visual odometry (/camera/odom) for state estimation and raw video frames (/camera/image_raw) for the perception pipeline. While the mavros_node handles the critical MAVLink bridge to keep the Pixhawk updated with position data, the vision_processor_node executes object detection algorithms to output target coordinates. The central decision-making unit, the mission_control_node, subscribes to both the target coordinates and the drone's local position to generate real-time velocity commands (cmd_vel), closing the loop by sending these setpoints back to the flight controller for execution.**

# 3 Identification of components with their specifications

## 3.1Components Rotarcraft:

## 1. Mechanical Components

**Frame: The ASCEND rotarcraft drone is built around a 500mm carbon fiber quadcopter frame, which forms the structural backbone of the vehicle.This custom quadcopter frame is fabricated from high-quality carbon fiber, making it lightweight, strong, and highly rigid.**

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

**The carbon-fiber arms provide excellent structural integrity with minimal weight, ensuring improved flight efficiency and reduced vibrations. The optimized arm thickness and reinforced motor mounts enhance durability and minimize damage during hard landings. The rigid frame design improves overall stability, enabling precise control, faster forward flight, and better payload handling compared to conventional frames.**

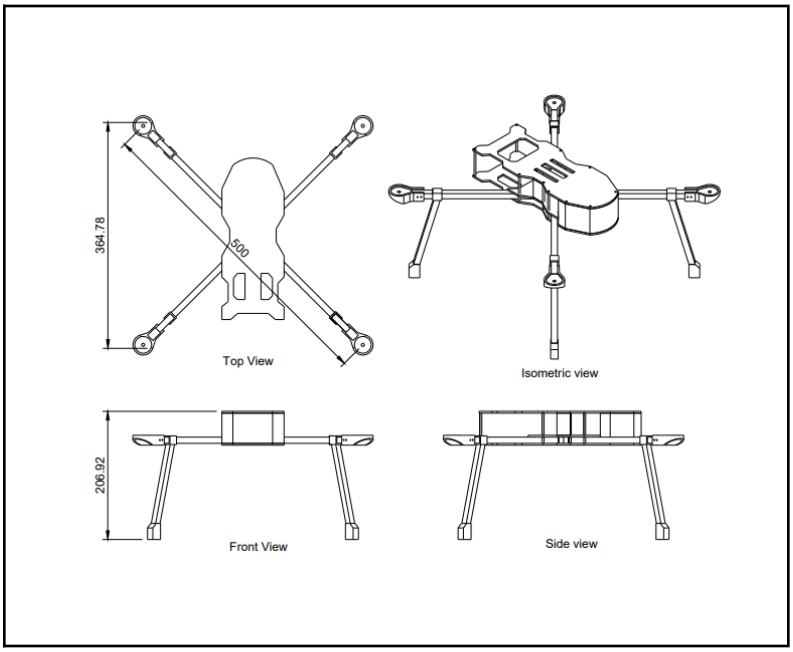


**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

**The drone's propulsion system consists of four AIR2216II KV920 brushless motors, each paired with an AIR 20A electronic speed controller (ESC). These motors provide sufficient thrust to lift the drone and its onboard electronics while maintaining precise control for maneuvering. The T1045 propellers (10×4.5) are arranged in a CW/CCW configuration to convert motor torque into lift effectively. While carbon fiber propellers were considered for slightly higher efficiency, nylon-glass propellers were chosen for their robustness and ability to withstand minor impacts and vibrations, which is important for repeated autonomous sortie**

# 2. Electrical Components

(a) Power Distribution

**A 4S 3300 mAh Li-Po battery powers the entire drone, supplying all motors and ESCs. A separate 5V BEC (2–3A) provides clean, regulated power for the Jetson Orin Nano, the Cube Orange+ flight controller, and sensors. This setup ensures stable voltage and protects electronics from motor noise.**

(b) Propulsion System

**The drone uses four AIR2216II KV920 motors, drawing 8–12A in hover and up to 22A at full load.**
**Each motor is controlled by a 20A ESC, capable of short 30A bursts.**
**T1045 propellers generate the necessary lift and influence efficiency, motor load, and stability.**

(c) Computation Hardware

**The Cube Orange+ flight controller handles stabilization and uses about 250–300 mA at 5 V.**
**The Jetson Orin Nano runs high-level processing and AI tasks, drawing 2–3 A at 5 V depending on workload.**

# 3. Sensors.

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

**a) Intel RealSense T265 – Visual-Inertial Odometry (VIO) (Fig-A)**

**Used for GPS-denied navigation. It estimates the drone's position and orientation using stereo vision + internal inertial sensors. Helps the drone know where it is in indoor/complex environments.**
**Position update:**
**$P(t)=P(t-1)+v(t)\Delta t+21a(t)\Delta t2$**
**Velocity update:**
**$v(t) = v(t-1) + a(t)*\Delta t$**

**b) TFmini-S 1D LiDAR – Altitude Measurement (Fig-B)**
**Provides very accurate altitude at low heights (0–5 m), where barometers are unreliable. Essential for stable hovering and smooth autonomous landing.**
**Time-of-flight distance:**
**$d = (c * t) / 2$**
**where**
**d = distance**
**c = speed of light**
**t = round-trip travel time**

**c) Raspberry Pi Camera Module 3 – Vision & Detection (Fig-C)**
**Used for object detection, feature tracking, and target identification. Works with Jetson's computer vision models to locate the docking station or mission targets.**
**Harris corner response:**
**$R = \det(M) - k*(\mathrm{trace}(M))^2$**
**where**
**M = structure tensor**
**$k \approx 0.04$**

## Appendix: Figures

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

| | | |
|---|---|---|
| | | |
| **Fig-(A) Intel RealSense T265** | **Fig-(B) TFmini-S 1D LiDAR** | **Fig-(C) Raspberry Pi Camera Module 3** |

# 4. Algorithms and Software

**The software stack integrates low-level control, high-level perception, and autonomous mission management. Low-level flight stabilization is handled by the PX4 autopilot firmware on the flight controller, which manages motor commands and ensures stable flight. High-level autonomy runs on the Jetson Orin Nano using ROS 2, with custom nodes in C++ and Python handling SLAM, path planning, and feature detection.**

**Sensor data from the IMU, LiDAR, and T265 camera are fused using an Extended Kalman Filter (EKF) to generate an accurate estimate of the drone's position and orientation. Path**

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

planning algorithms, including A* and RRT, allow the drone to explore a designated area efficiently while avoiding obstacles. The software also handles autonomous target detection, coordinate logging, and image capture for validation at the docking station. For returning and landing, the LiDAR measures height, and the T265 camera assists with precise alignment, ensuring the drone docks safely. Overall, the algorithms are designed to allow the drone to operate fully autonomously, performing multiple sorties without human intervention.

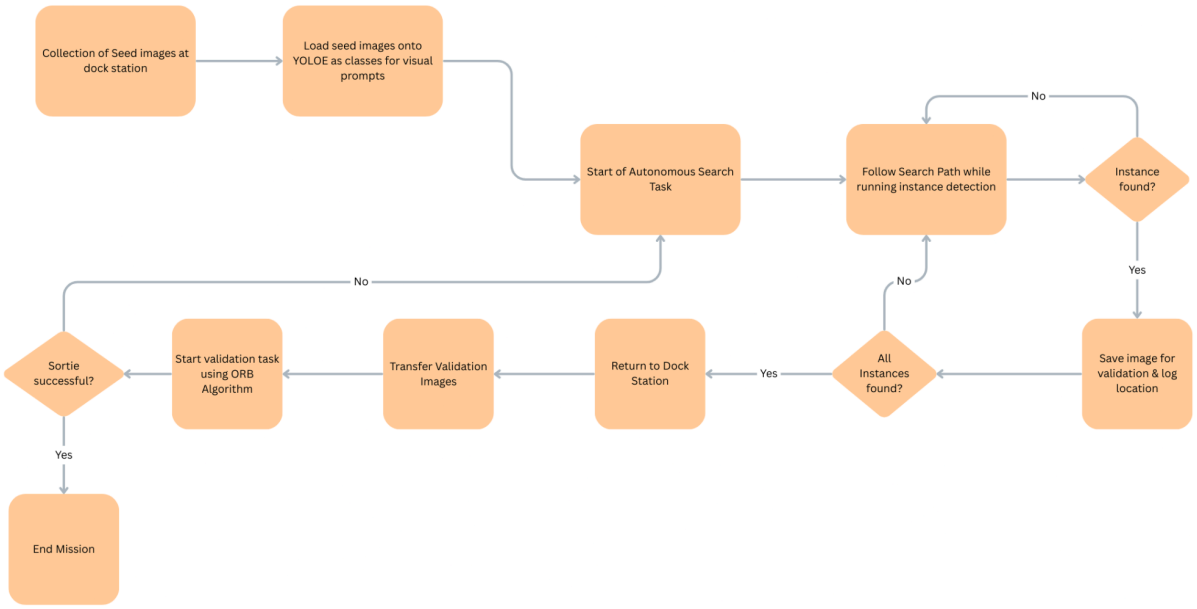


The mission workflow begins with the Seeding Task, where 3–5 sample feature images are

We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.

The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.

It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.

We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.

About Dock Station:

The proposed docking station is designed to perform accurate, reliable, and autonomous

collected at the dock station and loaded onto the YOLO-E model as visual prompts to define target classes. Once the Autonomous Search Task starts, the UAV follows a pre-defined path while running real-time instance detection to locate targets that are similar to the seed images. When an instance is found, the system saves a verification image and logs the local estimated coordinates; if not all instances are found, the UAV continues its search. After identifying the required targets, the UAV executes the Return Task to autonomously land at the dock station. The captured data is then transferred to the base station for the Validation Task, where an ORB pattern-matching algorithm compares the findings against the original seeds. If the sortie is successful, the mission ends; otherwise, the UAV may initiate repeat sorties to complete the objectives.

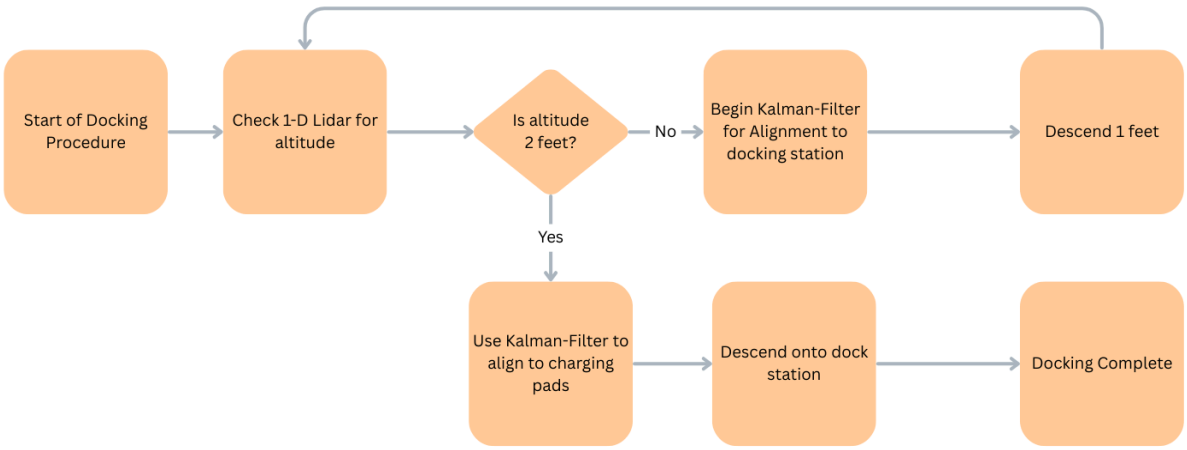


The process begins with the UAV utilizing a 1-D Lidar to verify its altitude, ensuring it

We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.

The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.

It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.

We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.

About Dock Station:

The proposed docking station is designed to perform accurate, reliable, and autonomous

**adheres to the strict prohibition against using GNSS or external navigation aids. If the altitude is not at the 2-foot threshold, the system employs a Kalman-Filter for alignment to the docking station while descending in increments; once the 2-foot altitude is reached, the filter specifically aligns the UAV with the charging pads to ensure a precise landing. This autonomous descent onto the dock station is critical because manual alignment or human intervention is strictly forbidden. Upon completion of the docking, the UAV can then fulfill the mandatory requirements of transferring image data and coordinates to the base station while simultaneously recharging its power system through the designated interfaces.**

## 3.2Components Dockstation:

# 4 ASCEND Realization plan

| No. | Hardware Details | Procurement Source (Market/Fabrication/3D Printing/…..) | Specifications/ Realization Plan | Quantity |
|---|---|---|---|---|

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

| | | | | |
|---|---|---|---|---|
| 1 | Frame | Fabrication (Carbon Fiber PLA) | 450mm quadcopter frame, lightweight and rigid, includes mounting points for landing gear and electronics | 1 |
| 2 | Motors | Market | AIR2216II KV920 brushless, 4S LiPo compatible, 64g each, provides sufficient thrust for UAV | 4 |
| 3 | ESCs | Market | AIR 20A ESC, continuous current 20A, peak 30A, 53x22x7 mm, connects to motors via 3.5mm banana plugs | 4 |
| 4 | Propellers | Market | T1045 (10×4.5), nylon + glass fiber, 68g total for 4, CW/CCW setup | 4 |
| 5 | Battery | Market | 4S 3300mAh LiPo, 16.8V full charge, provides power to motors, flight controller, and Jetson | 1 |
| 6 | Flight Controller | Market | Cube Orange flight controller module | 1 |
| 7 | Companion Computer | Market | Jetson Orin Nano, GPU accelerated, runs ROS2 for SLAM, navigation, and mission control | 1 |

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

| | | | | |
|---|---|---|---|---|
| 8 | Cooling Fan | Market | Fan for Jetson Orin Nano, maintains operating temperature during high-load computation | 1 |
| 9 | Visual Sensor | Market | Intel RealSense T265 camera, provides visual-inertial odometry (VIO) for GPS-denied navigation | 1 |
| 10 | 1D Lidar | Market | TFmini-S, for altitude measurement and safe landing | 1 |
| 11 | High-Current Switch | Market | XT60, 15–20A, for safe power on/off | 1 |
| 12 | Power Regulation / Power Electronics Component | Market | Holybro UBEC 12A: 3–14S input, selectable 6/7.2/8/9.2 V output, 12 A continuous (24 A peak), high-efficiency UBEC with full protection features. | 1 |

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

| | | | | |
|---|---|---|---|---|
| **13** | **Landing Gear with Metal contacts** | **Fabrication** | **Lightweight landing assembly to support charging after landing in the Docking station** | **1** |

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

# 5 Testing Plan

**To ensure that the ASCEND system meets the requirements of autonomous navigation, perception, and mission execution without external navigation aids, a structured testing approach is adopted. Validation is carried out at subsystem and integrated system levels using high-fidelity PX4 SITL, ROS 2, and Gazebo simulations to verify sensing, autonomy, and safety prior to hardware deployment.**

**Subsystem-Level Testing**

**Camera (Downward-Facing RGB Camera)**

1. **Accuracy of visual feature detection**
2. **Consistency of image capture for documentation**
3. **Robustness under varying lighting and viewpoints**

**IMU (Inertial Measurement Unit)**

1. **Stability under static and dynamic conditions**
2. **Accuracy of acceleration and angular rate measurements**

**Visual-Inertial Odometry (VIO)**

1. **Position and velocity estimation accuracy**
2. **Orientation tracking in dynamic flight conditions**

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

**Mapping and Perception Module**

1. **Flat surface detection for landing**
2. **Obstacle detection and avoidance**
3. **Consistency of real-time map generation**

**Flight Controller and Navigation**

1. **Autonomous takeoff and landing**
2. **GPS-denied navigation stability**
3. **Autonomous return-to-base execution**

**Integrated System Testing**

1. **Coordination between sensing, estimation, and control subsystems**
2. **End-to-end autonomous mission execution**
3. **Robustness under environmental disturbances (lighting changes, sensor noise)**

**<u>Test Plan Summary Table</u>**

| Test No. | Test Name | Description | Procedure | Expected Outcome |
|---|---|---|---|---|
| 1 | Visual Feature Detection | Verify camera's ability to detect | Simulate seeded features in Gazebo | Correct detection in >95% of trials |

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

| | | | | |
|---|---|---|---|---|
| | | target features | arena and evaluate detection confidence | |
| 2 | Image Capture Validation | Verify quality of captured verification images | Capture images at different altitudes and viewpoints | Images suitable for feature validation |
| 3 | IMU Stability | Test IMU behavior in static and dynamic flight | Log IMU data during hover and maneuvers | Stable acceleration and rate estimates |
| 4 | VIO Position Tracking | Validate position and velocity estimation | Compare VIO output with commanded motion | Position error within acceptable bounds |
| 5 | Autonomous Takeoff | Verify safe autonomous takeoff | Execute takeoff sequence in simulation | Smooth ascent and stable hover |
| 6 | Autonomous Landing | Validate safe landing at base station | Perform repeated landing trials | Landing within tolerance region |
| 7 | End-to-End Mission | Verify full ASCEND mission | Execute takeoff → search → return → land | Mission completed without intervention |
| 8 | Resilience Testing | Test behavior under faults | Simulate sensor dropouts and low | Safe recovery and controlled landing |

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

| | | | | |
|---|---|---|---|---|
| | | | **energy** | |

# 6 Brief of system specification

| Sl. No. | Description | Specification |
|---|---|---|
| 1. | Overall mass | **1689.24** |
| 2. | Overall dimensions (mm) | **500*500*206** |
| 3. | Power requirements(**w**) | **243.16** |
| 4. | Flight time per charge | **9.64 min** |
| 5. | Number of propellers and their size | **4(10x45)** |
| 6. | Features | |
| 7. | Others | If any |

# 7 Overview of the emergency response system.

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

| Emergency situation | Description | Solution |
|---|---|---|
| Power failure | An unexpected mid-flight power loss may cause the drone to crash, risking damage to both the drone and nearby areas. | Implement a battery health monitoring system and use an auxiliary battery to initiate an emergency landing before complete power loss. |
| Communication loss | i) A disruption in communication between the drone and the ground station can result in a potential loss of control.<br><br>ii) Loss of communication between the Pixhawk and Jetson can disrupt autonomous flight operations. | i) Enable an autonomous<br><br>return-to-home (RTH)<br><br>function. Use<br><br>pre-programmed safe zones<br><br>as fallback destinations.<br><br>ii) This issue is mitigated by utilizing PX4's offboard mode to maintain autonomous control during communication interruptions. |
| Obstacle collision | Inability to detect or avoid obstacles during flight may result in damage to the drone or surrounding objects. | Deploy real-time obstacle detection and avoidance algorithms using RANSAC-based point cloud analysis for precise avoidance. |

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

| | | |
|---|---|---|
| **Landing zone obstruction** | | |
| **Environmental factors** | **Adverse conditions like water-ice, dry-ice and global dust stroms affect drone stability and camera vision.** | **Upon detection of camera degradation due to dust or environmental factors, the system activates an autonomous RTH sequence to restore sensor reliability.** |
| **System malfunctions** | **Failures in key components like the<br><br>IMU, camera, or point cloud mapping, leading to operational errors.** | **Failures in essential components are managed through continuous health monitoring and fail-safe mechanisms that trigger autonomous RTH or controlled landing.** |

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

# 8 Project management

**To ensure the successful execution of the ASCEND mission, the project is managed by assigning clear roles and timelines. The following management strategy has been established.**

## 8.1 Team Roles and Responsibilities

**The team is divided into functional roles, with each team member having a task assigned to them.**

| No. | Task | Main Responsibility | Deadline for Completion | Secondary Responsibility |
|---|---|---|---|---|

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

| | | | | |
|---|---|---|---|---|
| **1** | **Frame Assembly & Wiring** | **Poojith** | | **Tushar** |
| **2** | **Hardware and software Integration** | **Tanmay** | | **Ranjith** |
| **3** | **Simulation and Testing** | **Sanjana** | | **Poojith** |
| **4** | **Docking station** | **Saalim** | | **Tushar** |
| **5** | **ROS Implementation** | **Ranjith** | | **Tanmay** |
| **6** | **Navigation and Mapping** | **Dhanushree** | | **Neil** |
| **7** | **Detection and Validation** | **Laksh** | | **Aman** |

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

| | | | | |
|---|---|---|---|---|
| **8** | **Documentation and Report** | **Aman** | | **Neil** |

## 8.2 Project Schedule & Milestones

**The ASCEND project follows a milestone-driven schedule to ensure timely completion of design, development, and validation activities in alignment with the IRoC-U 2026 competition timeline. A combined hardware–software Gantt-based planning approach is adopted to track progress and manage dependencies between subsystems.**

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

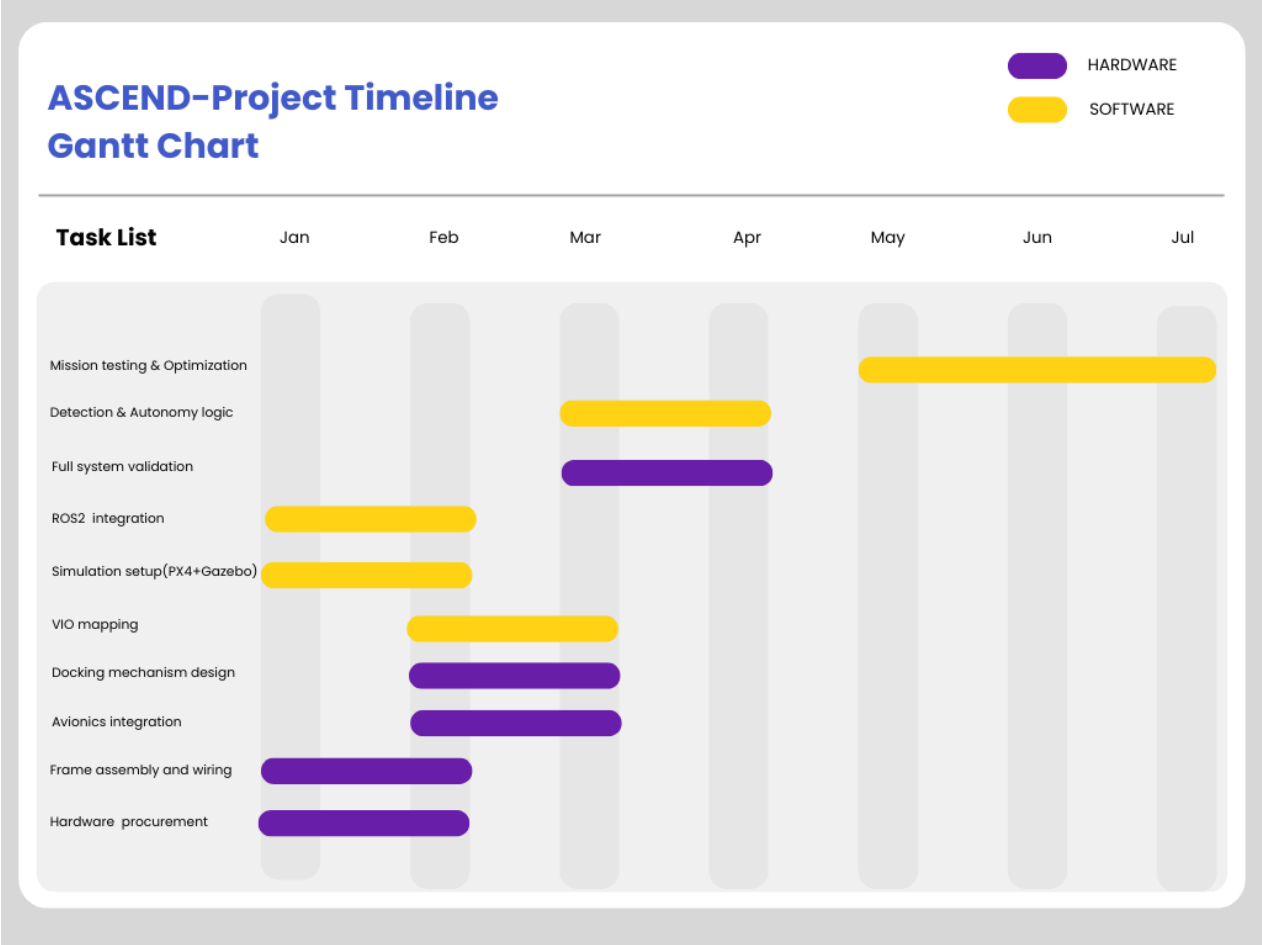


**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

**The development is structured into four major phases:**

- **Phase I – Concept Definition and Simulation Setup (Dec 2025 – Jan 2026): Finalization of system architecture and mission workflow. High-fidelity simulation is established using PX4 SITL, ROS 2, and Gazebo to validate autonomy, perception, and navigation algorithms in a GPS-denied environment.**

- **Phase II – Hardware Integration and Software Development (Jan 2026 – Mar 2026): Airframe assembly, avionics integration, and docking station development are carried out in parallel with implementation of visual-inertial odometry, mapping, and feature detection algorithms.**

- **Phase III – Integrated Testing and Validation (Mar 2026 – Apr 2026): Subsystem and system-level testing is performed to validate autonomous takeoff, search, return, landing, data transfer, and charging operations under competition-like conditions.**

- **Phase IV – Refinement and Competition Readiness (Apr 2026 – Jul 2026): Performance optimization, robustness testing, and iterative improvements are conducted based on evaluation feedback, leading to final system readiness for the field demonstration.**

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

**The internal milestones are synchronized with the official IRoC-U 2026 schedule to ensure progressive system maturity at each evaluation stage, culminating in a fully autonomous and competition-ready ASCEND system.**

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**

# 9 Novelty in the overall proposal

If a team believes that their approach contains originality, they should emphasize it in this section.

Criteria for Assessment:

- Originality in terms of system design, hardware/software selection, etc.

**<Suggested length: 1-2 pages>**

**Disclaimer: The content in this template is an example and the matter should not be considered as input for proposal.**

**We are using a custom X-frame drone made of carbon fiber Shown in the above Figures. This material makes the drone very strong yet lightweight. The four landing legs have metal tips to keep it steady when it touches the ground. Because of its efficient motors and flight controller, the drone can fly smoothly for a long time. The onboard computers and sensors will help it complete the ASCEND mission with high accuracy.**

**The drone was compared to both commercial and academic quadcopters to assess its overall performance, cost-efficiency, and design features. Unlike high-end drones such as the DJI Matrice 100 or Parrot Anafi USA, our drone offers a more affordable, modular alternative with reliable payload handling and autonomous capabilities.**

**It can carry a payload of up to 500g, making it suitable for our autonomous flight computer and vision devices. It is under 2kg, made Using Off-the-Shelf Components including BLDC High Torque Motor, carbon fiber frame, LiPo battery, Pixhawg orange cube, etc., balancing durability with the ability to perform extended flights and carry payloads.**

**We conclude the quadcopter is optimal for ASCEND: it can hover and inspect up-close, meets weight and power budgets, and leverages abundant commercial and open-source components.**

**About Dock Station:**

**The proposed docking station is designed to perform accurate, reliable, and autonomous**