Synergy
INTEGRATION
TRADING LLC

Display | Innovation | Computing
Series - 2026

Company Profile

5+
Countries Presence

1,000+
Schools

1,00,000+
Active Learners

Powering the next generation of digital innovation through intelligent display and computing solutions.

Qonevo Technologies, a member of the Synergy Integration Trading LLC, is a leading innovator in display and computing solutions designed to power the next generation of intelligent experiences. With a strong commitment to quality, performance, and technological excellence, Qonevo delivers products that seamlessly blend advanced engineering, cutting-edge design, and superior reliability.

With deep expertise in Interactive Flat Panels (IFPs), OPS - computing systems, and educational technology solutions, Qonevo empowers schools, universities, enterprises, and government institutions to embrace digital transformation in the classroom and workplace alike.

Our interactive displays combine brilliant visuals with intelligent touch technology, offering seamless connectivity, intuitive user interfaces, and powerful computing integration. Complemented by our OPS units, mini PCs, and embedded solutions, Qonevo delivers a complete ecosystem for smart classrooms, corporate collaboration, and digital signage environments.

Our portfolio also spans a comprehensive range of industrial and commercial displays, embedded computing systems, and integrated digital solutions — built to serve diverse sectors including automotive, industrial automation, healthcare, retail, defense, and smart infrastructure.

As part of the **Synergy Integration Trading LLC,** Qonevo leverages a global ecosystem of research, manufacturing, and service capabilities to deliver scalable, high-value technology solutions to clients worldwide. Our focus on innovation, customer partnership, and sustainability drives us to continuously redefine & ensuring our partners and customers always stay ahead in a rapidly evolving digital world.

Proudly recognized under national initiatives supporting innovation and quality.

Synergy INTEGRATION TRADING LLC

Contents

Interactive Flat Panel 03-05

All-In-One PC & OPS 06

Active LED Display 07-09

Advertising Display & Signage 10-11

Kiosk & Smart Display 12-13

Camera & PTZ | Accessories 14

Interactive Flat Panel

Limitless Interactive

AI Powered Interactive Flat Panel:

Interactive displays built for collaborative learning and work. Featuring advanced AI-powered whiteboard capabilities, wireless casting, and precise touch responsiveness, these panels transform classrooms and meeting spaces.
Intuitive annotation tools and screen mirroring enable seamless group engagement.

- 40+ Point Touch
- Android 16
- Google EDLA
- WIFI-5/6
- Zero Bonding Technology
- 8 Array Microphones System
- Pressure Sensing Writing
- 48 Megapixels AI Cam

AI Features:



ABC Pen
Recognizes handwritten text and converts it into digital text.

Magic Pen
Recognizes and interprets hand drawn doodles

FX Pen
Recognizes mathematical expressions and equations.

Mind Map
Generate complex mind maps with the click of a button

Powered By: android Windows **Supports:** YouTube Google Play zoom

Specifications	Size	65"	75"	86"	98"	110"
	Technology	CVTE/Lango/KTC	CVTE/Lango/KTC	CVTE/Lango/KTC	CVTE/Lango/KTC	CVTE/Lango/KTC
	Chipset	9679/ V100/311D2/3576	9679/ V100/311D2/3576	9679/ V100/311D2/3576	9679/ V100/311D2/3576	9679/ V100/311D2/3576
	Storage	8GB + 128GB/ 16GB + 256GB	8GB + 128GB/ 16GB + 256GB	8GB + 128GB/ 16GB + 256GB	8GB + 128GB/ 16GB + 256GB	8GB + 128GB/ 16GB + 256GB
	Color	Silver/Black	Silver/Black	Silver/Black	Silver/Black	Silver/Black
	Protection panel	4mm Anti glare tempered glass	4mm Anti glare tempered glass	Anti glare tempered glass	Anti glare tempered glass	Anti glare tempered glass
	Installation method	Mobile stand/wall mount	Mobile stand/wall mount	Mobile stand/wall mount	Mobile stand/wall mount	Mobile stand/wall mount
Liquid Crystal Display Panel	Screen scale	16:9	16:9	16:9	16:9	16:9
	Display brand	BOE/CSOT	BOE/CSOT	BOE/CSOT	BOE/CSOT	BOE/CSOT
	Display color	1.07B(8-bit+FRC)	1.07B(8-bit+FRC)	1.07B(8-bit+FRC)	1.07B(8-bit+FRC)	1.07B(8-bit+FRC)
	Resolution ratio	3840*2160	3840*2160	3840*2160	3840*2160	3840*2160
	Refresh rate	60Hz	60Hz	60Hz	60Hz	60Hz
	Luminance	≥ 400cd/m2	≥ 400cd/m2	≥ 450cd/m2	≥ 450cd/m2	≥ 500cd/m2
	Viewing angle	89/89/89/89 (Typ.)	89/89/89/89 (Typ.)	89/89/89/89 (Typ.)	89/89/89/89 (Typ.)	89/89/89/89 (Typ.)
	Contrast	1200: 1 (Typ.) (transmission)	1200: 1 (Typ.) (transmission)	1400: 1 (Typ.) (transmission)	1400: 1 (Typ.) (transmission)	1400: 1 (Typ.) (transmission)
	Backlight lifetime	≥ 30K Hours	≥ 30K Hours	≥ 30K Hours	≥ 30K Hours	≥ 30K Hours
Infrared Touch Screen	Touch type	Infrared touch	Infrared touch	Infrared touch	Infrared touch	Infrared touch
	Touch count	20 points	20 points	20 points	20 points	20 points
	Touch accuracy	±1mm	±1mm	±1mm	±1mm	±1mm
	Response time	≤ 4ms	≤ 4ms	≤ 4ms	≤ 4ms	≤ 4ms
	Identifiable object	Finger or stylus	Finger or stylus	Finger or stylus	Finger or stylus	Finger or stylus
	Transparency	≥ 85%	≥ 85%	≥ 85%	≥ 85%	≥ 85%
	Temperature range	Operating temp.: -10°C-60°C	Operating temp.: -10°C-60°C	Operating temp.: -10°C-60°C	Operating temp.: -10°C-60°C	Operating temp.: -10°C-60°C
	Operating voltage	DC 5V	DC 5V	DC 5V	DC 5V	DC 5V
	Power dissipation	1W-5W	1W-5W	1W-5W	1W-5W	1W-5W
Input/Output Devices & Features	Speakers	20 Watt x 2/ Optional Subwoofer	20 Watt x 2/ Optional Subwoofer	20 Watt x 2/ Optional Subwoofer	20 Watt x 2/ Optional Subwoofer	20 Watt x 2/ Optional Subwoofer
	Interface	HDMI x 3, VGA x 1, Front Ports (HDMI/ USB)	HDMI x 3, VGA x 1, Front Ports (HDMI/ USB)	HDMI x 3, VGA x 1, Front Ports (HDMI/ USB)	HDMI x 3, VGA x 1, Front Ports (HDMI/ USB)	HDMI x 3, VGA x 1, Front Ports (HDMI/ USB)
	Microphone	8 Array microphone with 10 m pickup range	8 Array microphone with 10 m pickup range	8 Array microphone with 10 m pickup range	8 Array microphone with 10 m pickup range	8 Array microphone with 10 m pickup range
	Camera	48 megapixels AI, 120 degrees wide Angle	48 megapixels AI, 120 degrees wide Angle	48 megapixels AI, 120 degrees wide Angle	48 megapixels AI, 120 degrees wide Angle	48 megapixels AI, 120 degrees wide Angle
Package	Net weight	≤ 40Kg	≤ 52Kg	≤ 65Kg	85KGS	110KG±5KG
	Gross weight	≤ 49kg	≤ 65kg	≤ 81kg	98KGS	144KG±5KG
	Bare machine size	1484*914.4 *97.3mm	1706.16*1039.53 *97.3mm	1952.4*1179.4 *97.3mm	1957*1160 *100mm	2499.6*1474.2 *95.5mm
	Package size	1582(L)*1002(H) *185(D)mm	1796(L)*1129(H)* 194(D)mm	2048(L)*1268(H) *194(D)mm	2360(L)*1430(H) *×308(D)mm	2667(L)*1644(H) *230(D)mm

Gravity AI - Limitless Intelligence

Gravity AI transforms your interactive flat panel into a dynamic teaching assistant. Designed for the future of learning, it reads, writes, and thinks alongside you, helping educators save time, simplify complex ideas, and inspire curiosity. From smart handwriting recognition to real-time insights, Gravity AI adapts to your workflow, not the other way around.

Core Features:

Generate Lesson Plan: Automatically generate comprehensive lesson plans for objectives.

Text summarize: Take any text and summarize it with custom writing style.

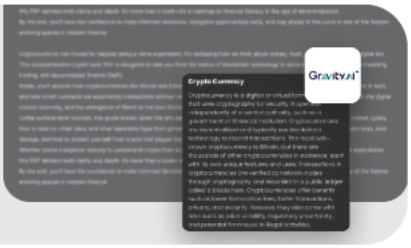

Research Assistant: Find information and sources for a research project.

Rubric Builder: Have AI write rubric for an assignment you are creating for your class in a table format.

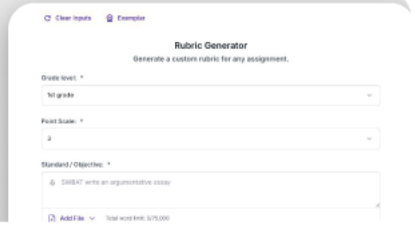

Chat With Documents: Upload documents and ask questions about their content.

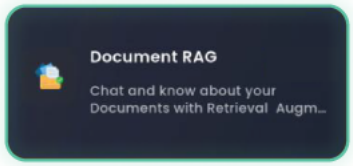

Create Shapes: Transform drawings into precise shapes for effective teaching.

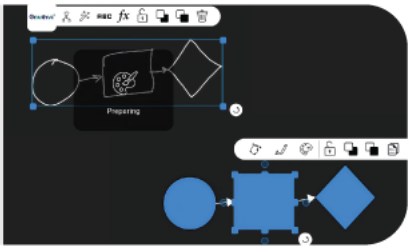

Interactive Learning Tools

Versatile Teaching Aids

Time Efficiency

Enhanced Student Engagement

Gravity.AI™

Gravity AI empowers creativity, learning, and productivity - transforming classrooms, workflows, and ideas into intelligent, seamless, and limitless experiences that amplify human imagination and innovation.

All-In-One PC

Durable & high performing Qonevo All-In-One PC specially designed for computer lab & corporates, with multiple specifications & latest configuration Qonevo All-In-One PC stand ahead in the segment.

All-In-One PC Features:

- 4K Ultra HD Image Quality
- Built-In Hidden Press Camera
- Quick-Release Base
- Adjustable Height and Angle

Specifications				
Screen Size	23.8" | 27"	**Brightness**	250cd/m²
Generation	12th - 14th	**Static Contrast**	3000:1
Available Colors	Tarnish/Black/White	**Panel Type**	IPS
Resolution	1920*1080p(23.8") | 2560*1440p (27")	**Top Interface**	Press the hidden camera
CPU	I5 / I7	**Speakers**	4Ω3W*2
RAM	Upto 32GB	**Storage**	Upto 2TB
Refresh Rate	≤ 60Hz-75Hz(23.8") | 144Hz (27")		

OPS-PC

Qonevo OPS PC are designed to be fixed in slot of Interactive Flat Panels & power the same with computing(Windows) capabilities

Specifications	
DDR4 Memory/RAM	4GB to 64GB
Storage	128G to 2TB
CPU	I3 I5 I7 Gen 12th to 13rd
Slots	Inbuilt for Interactive Flat Panel

Powered By: intel Microsoft

Active LED Display

Outdoor LED Display

High impact active LED displays deliver stunning brightness & rich color depth. Advanced thermal management & modular architecture ensure consistent performance in demanding conditions while scaling effortlessly.

Indoor LED Display

Active LED displays deliver vibrant color accuracy with flexible configurations for retail, events, & corporate spaces. Advanced thermal management ensures seamless performance while maintaining visual excellence.

Features:

- High Performance
- Single Pixel Calibration
- Color Temperature & Brightness Adjustable
- 160° Wide Viewing Angle
- ≥100% NTSC Color Gamut

Flexible LED Display:

Flexible Module

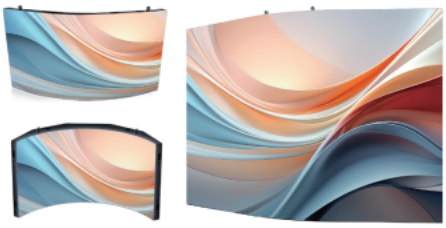

Ultra Sleek Design

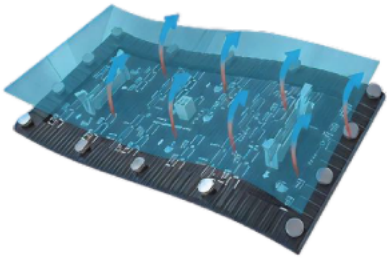

Heat Insulation and Flame Retardancy

Outdoor LED Display Specification

Item	QT0250	QT0307	QT0400	QT0500	QT0592	QT0800	QT1000
Pixel Structure	SMT 3 in 1						
Pixel Pitch (mm)	2.5	3.076	4	5	5.925	8	10
Module Resolution (WxH)	128×64	104×52	80×40	64×32	52×27	40×20	32×16
Module Size (mm) (WxH)	320×160						
Module Weight (Kg)	0.45±0.05	0.45±0.05	0.43±0.05	0.41±0.05	0.42±0.05	0.42±0.05	0.42±0.05
Unit Area (m^2)	0.0512						
Pixel Density (dots/m^2)	160000	105625	62500	40000	27216	15625	10000
White Balance Brightness (nits)	≥5000						
Color Temperature (K)	3000~38000 adjustable						
Horizontal Viewing Angle	160°						
Vertical Viewing Angle	140°						
Deviation from the Color Luminous Center	<3%						
Brightness Uniformity	≥97%						
Contrast Ratio	5000:1						
Peak Power Consumption (W/m^2)	≤660						
Average Power Consumption (W/m^2)	≤220						
Power Supply Requirements (V)	DC:4.5						
Single Module Current (A)	7.5A						
Drive Mode (Constant current drive)	16S	13S	10S	8S	7S	4S	2S
Frame Rate (Hz)	50&60						
Refresh Rate (Hz)	≥7680						
Typical Lifespan (hours)	Upto 100,000						
Working Temperature Range (°C)	-20 ~ 40						
Storage Temperature Range (°C)	-20 ~ 60						
Working Humidity Range (RH)	10~80% no condensation						
Storage Humidity Range (RH)	10~85% no condensation						

Indoor LED Display Specification

Parameter Item	QT0100	QT0125	QT0153	QT0186	QT0200	QT0250	QT0300	QT0400
LED Configuration	SMT 3 in 1							
Pixel Pitch (mm)	1	1.25	1.538	1.86	2	2.5	3.076	4
Module Resolution (WxH)	320×160	256×128	208×104	172×86	160×80	128×64	104×52	80×40
Module Size (mm) (WxH)	320×160							
Module Weight (Kg)	0.39±0.05	0.39±0.05	0.39±0.05	0.39±0.05	0.38±0.05	0.37±0.05	0.39±0.05	0.39±0.05
Module Area (m^2)	0.0512							
Pixel Density (dots/m^2)	1,000,000	640,000	422500	288,906	250000	160000	105625	62500
White Balance Brightness (nits)	≥500	≥500	≥500	≥500	≥500	430~450/ ≥600	500~550	≥600
Color Temperature (K)	3000~38000 Adjustable							
Horizontal Viewing Angle	160°							
Vertical Viewing Angle	140°							
Deviation of LED luminance Center	<3%							
Brightness Uniformity	≥97%							
Contrast Ratio	5000:1							
Peak Power Consumption (W/m^2)	≤440	≤440	≤352	≤352	≤352	≤230/ ≤396	≤308	≤370
Avg Power Consumption (W/m^2)	≤148	≤148	≤118	≤118	≤118	≤77 / ≤132	≤103	≤123
Power Supply Requirements (V)	5	5	4	4	4	2.6 / 4.5	3.5	4
Single Module Current (A)	DC:4.5	DC:4.5	DC:4.5	DC:4.5	DC:4.5	DC:4.5	DC:4.5	DC:4.5
Drive Mode (Constant current drive)	54S	64S	52S	43S	40S	64S / 32S	52S	20S
Frame Rate (Hz)	50&60							
Refresh Rate (Hz)	≥3840							
Lifetime (hrs)	Upto 100,000							
Operation Temperature (°C)	-10 ~ 40							
Storage Temperature (°C)	-20 ~ 60							
Operation Humidity (RH)	10~80% no condensation							
Storage Humidity (RH)	10~85% no condensation							

Active LED Display

Outdoor LED Display

High-brightness outdoor LEDs built for visibility, durability, and vibrant performance in any environment. Modular design and smart thermal control ensure reliability and effortless scalability.

Indoor LED Display

Precision color, sleek form, and flexible configurations for retail, events, and corporate spaces. Engineered for seamless visuals and consistent performance.

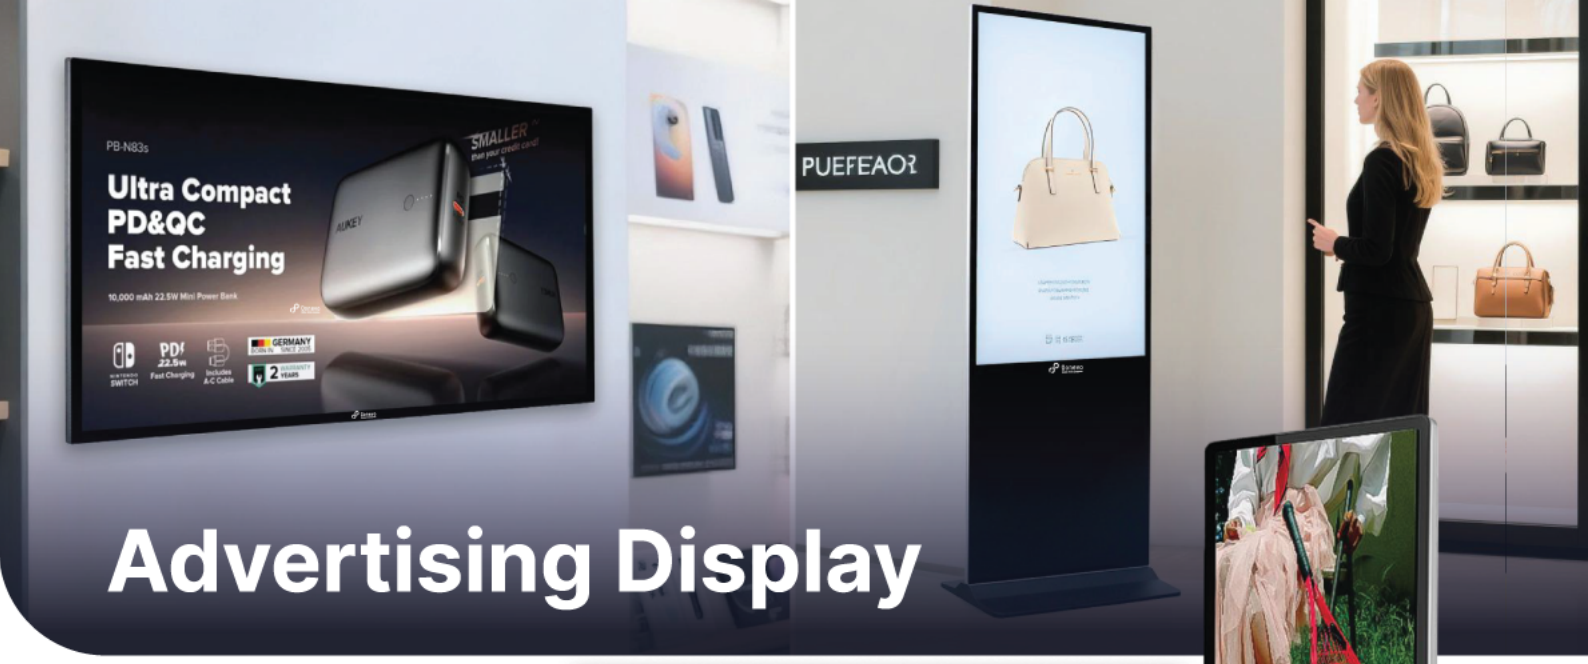

Advertising Display

Captivating content delivery for retail, transit, & corporate environments. Our advertising displays combine high brightness with superior color accuracy in flexible wall-mounted & freestanding configurations. Advanced scheduling systems & intuitive content management ensure dynamic engagement.

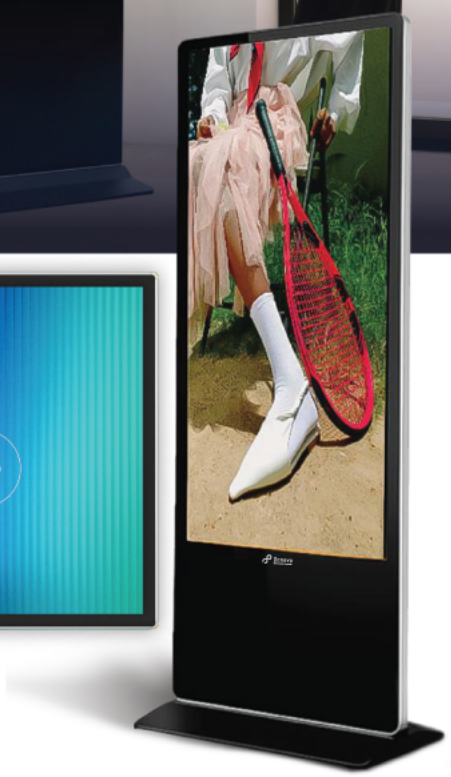

Wall Mounted & Floor Standing Digital Signage Features:

- Remote Publishing
- 178° Wide Viewing Angle
- USB Plug & Play
- Timing Switch
- Smart Split Screen Layout

Display	**Backlight**	ELED	**H:** ELED<43inches /DLED 65 inches or more **V:** ELED<65inches /DLED 65 inches or more	
	Resolution	3840*2160 4K UHD display	**Viewing Angle**	176 *176 Full viewing Angle
	Response Time	≤ 5ms	**Document Presentation**	16:9 / 9:16
	Brightness	350cd/ m² (optional 500cd/m² / 700cd/m²)		
Look	**Type**	Horizontal | Vertical	**Tempered Glass**	4mm
	Frame	All-metal body ultra-thin design		
Power	**Power Input**	AC 100V-240V50-60 HZ	**Standby Power Consumption**	<0.5W
	Speaker	10WX 2	**Functional Interface**	RJ45, USB, TFCard, HDMIIn. Earphone out
System	**CPU**	I3, I5, and I7 configurations are available	**Single Machine**	Selectable
	Android (Standard)	**H:** Available in 2+16G/4+32G Config. | **V:** Available in 1+8G/2+8G/2+16G Config.		
	Touching Function	Nontouch, Infrared touch, Capacitive touch(Option)	**Operating System**	Without OS, android, window(Option)

H: Horizontal Type(Wall Mounted Digital Signage) | **V:** Vertical Type(Floor Standing Digital Signage)

Signage

From indoor directories to outdoor wayfinding, our signage solutions deliver visual clarity and architectural elegance. Engineered to perform across varied lighting conditions with comprehensive connectivity options and customizable layouts.

Signage Features:

- Liquid Crystal Panel
- 2K/4K Display
- Single-Screen or Split-Screen Display
- U disk/Wi-Fi/ 4G smart release
- Anti-riot/anti-theft design
- Commercial Grade Battery
- Rain & Sun Protection
- Android /Windows Multi-System

Display	Backlight Source	ELED	Viewing Angle	178*178 full view
	Resolution	1920*1080	Display Ratio	16:9
	Brightness	Original 700cd/m² 1500cd/m²		
Look	Frame	All-metal body ultra-thin design	Customization	Supports color and LOGO
	Tempered Glass	4mm high-quality high transparency		
System	CPU	Cortex-A7 architecture, 1.2GHz	Built-in Memory	Supports up to 32GB of TF card expansion
	Internal Storage	DDR31G	Decoding Resolution	Supports up to 1080P
	Operating System	Android 7.1.1	Network Support	3G/4G network, Ethernet, WiFi, wireless peripheral expansion
	USB2.0 Port	2 USBHOSTstandard ports, 2 USB expansion ports	System Upgrade	Supports USB, SD card, and remote upgrades.

Feature	Charging Time	7 Hours	Battery Capacity	50000mAh	Power	110W
	Battery Life	14 Hours	Voltage	25.2V	Energy Efficiency	1088.54Wh

Kiosk

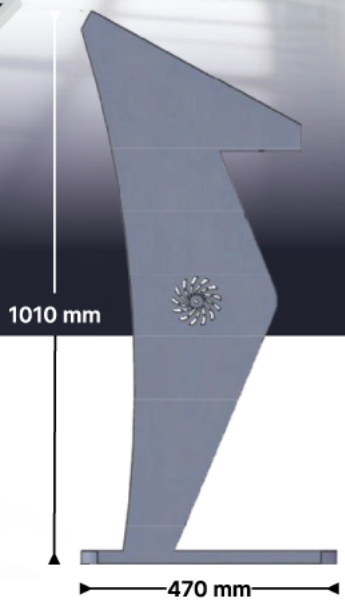

Self-service excellence for high-traffic environments. Our kiosks deliver smooth interaction across retail, campus & corporate settings. With secure payment processing, intuitive interfaces & rugged construction, they streamline transactions while maintaining premium brand experience.

Kiosk Features:

- Wireless Wi-Fi 5/6
- 1920*1080P
- Color Gamut NTSC≥72%
- Long Standby
- Smart Chip
- Multiple Touch Gestures
- 10 Points Touch
- Android/Windows

Display	**Backlight**	ELED	**Remarks**	ELED<65inches /DLED 65 inches or more
	Resolution	1920*1080/3840*2160 4K UHD display	**Viewing Angle**	176 *176 Full Viewing Angle
	Response Time	≤ 5ms	**Document Presentation**	16:9
	Brightness	350cd/ m²	**Touch Control**	Infrared touch/Capactive Touch Optional
Look	**Type**	Vertical	**Tempered glass**	3mm
	Frame	All-metal body ultra-thin design		
Power	**Power Input**	AC 100V-240V50-60 HZ	**Standby Power Consumption**	<0.5W
	Speaker	10WX 2	**Functional Interface**	RJ45, USB, TFCard, HDMIIn. Earphone out
System	**CPU**	I3, I5, and I7 configurations are available	**Single Machine**	Selectable
	Android (Standard)	Available in 1+8G/2+8G/2+16G configurations		

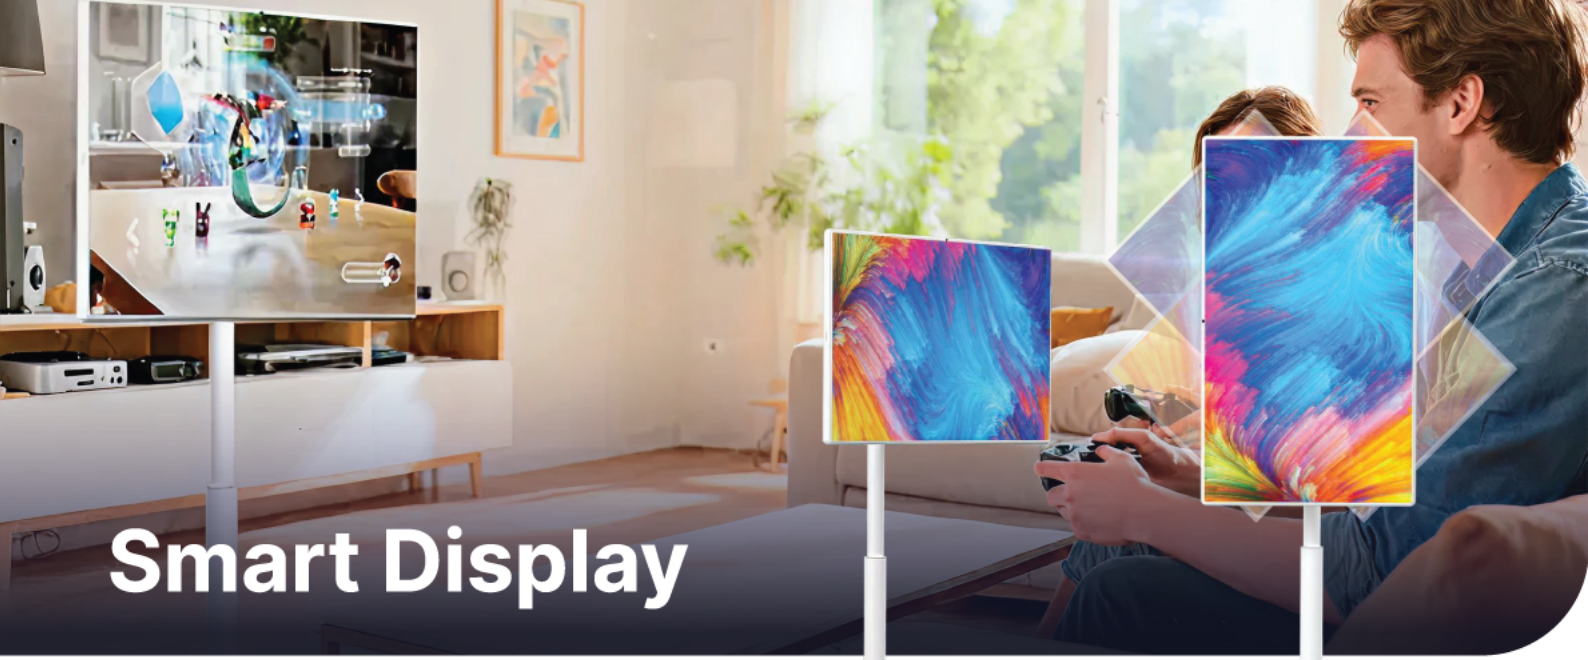

Smart Display

Dynamic versatility meets seamless integration. Our smart displays rotate 360 degrees to adapt to any presentation format while supporting wireless projection from multiple devices and responsive touch interaction.

Smart Display Features:

- Touch Screen Display
- Versatile Design
- 4 Hours Battery Backup
- Go Wireless

More Features:

Stereo Bass Speaker
Enhances sound with deep, immersive bass and clarity.



Universal Roll
Adaptable to different uses.

Fully adjustable
For optimal performance and comfort.

Specifications				
	Sizes Available	27" | 32"	**Brightness**	350 nits
	Wireless Project	Supported	**Up and Down Lift**	180 mm
	Battery Endurance	About 4–6 hours	**Refresh Rate**	Upto 40–75 Hz
	Document Presentation	Supported	**Color Gamut**	100% sRGB
	Resolution	1920 × 1080	**Response Time**	≤ 8 ms
	Mainboard Solution	MTK8788 / MTK8183 / RK3576	**Viewing Angle**	178° / 178°
	Contrast Ratio	1000:1	**Touch Points**	10-point touch
	Touch Tools	Fingers, touch pens, etc.	**Color Depth**	16.7M
	Touch Technology	P-Cap touch		

Power				
	Input Voltage	100-240V AC 50/60HZ	**Full Battery Life**	4H
	Standby Consumption	<0.5W	**Power ON Consumption**	≤60w
	Power In	13.5V6A	**Speaker Consumption**	6Ω10W*2
	Built-in Battery Capacity	10000mAh/111Wh		

Camera & PTZ

Conference cameras provide crystal-clear imaging with wide-angle lenses & low-light correction for seamless video conferencing & hybrid meetings. PTZ cameras add intelligent versatility with motorized pan, tilt, & zoom capabilities plus AI-powered speaker tracking for large presentations & dynamic environments. Both integrate effortlessly with collaboration platforms, ensuring broadcast-quality visuals & reliable performance in any meeting space.

Conference Camera:

PTZ Camera:

Accessories

Precision peripherals that extend capability and comfort. Our stylus ensures accurate interaction on touch displays with responsive feedback. Modular slider and stand systems adapt to any installation requirement. Each accessory reflects our commitment to craftsmanship, durability, and seamless integration, enabling displays to perform exactly as intended.

Stand:

Slider:

Stylus:

Synergy
INTEGRATION
TRADING LLC

Qonevo® Solution | Service | Automation | MAKERSPACE™ MASTERS | UniqInvent

United in Innovation, Committed to Excellence

Synergy Integration Trading LLC

The Exchange Tower, Business Bay
Dubai, United Arab Emirates

www.synergyintegration.ae

+971 54 719 5983 | +971 56 929 5235

MSME Ministry of MSME, Govt. of India | #startupindia | MAKE IN INDIA | ISO 9001:2015 | GeM Government e Marketplace