



Company Profile

Powering the next generation of digital innovation through intelligent display and computing solutions.

5+

Countries Presence

Qonevo Technologies, a member of the Synergy Integration Trading LLC, is a leading innovator in display and computing solutions designed to power the next generation of intelligent experiences. With a strong commitment to quality, performance, and technological excellence, Qonevo delivers products that seamlessly blend advanced engineering, cutting-edge design, and superior reliability.

1,000+

Schools

With deep expertise in Interactive Flat Panels (IFPs), OPS - computing systems, and educational technology solutions, Qonevo empowers schools, universities, enterprises, and government institutions to embrace digital transformation in the classroom and workplace alike.

1,00,000+

Active Learners

Our interactive displays combine brilliant visuals with intelligent touch technology, offering seamless connectivity, intuitive user interfaces, and powerful computing integration. Complemented by our OPS units, mini PCs, and embedded solutions, Qonevo delivers a complete ecosystem for smart classrooms, corporate collaboration, and digital signage environments.

Our portfolio also spans a comprehensive range of industrial and commercial displays, embedded computing systems, and integrated digital solutions — built to serve diverse sectors including automotive, industrial automation, healthcare, retail, defense, and smart infrastructure.

As part of the **Synergy Integration Trading LLC**, Qonevo leverages a global ecosystem of research, manufacturing, and service capabilities to deliver scalable, high-value technology solutions to clients worldwide. Our focus on innovation, customer partnership, and sustainability drives us to continuously redefine & ensuring our partners and customers always stay ahead in a rapidly evolving digital world.

Proudly recognized under national initiatives supporting innovation and quality.



Contents



Interactive Flat Panel

03-05



All-In-One PC & OPS

06



Active LED Display

07-09



Advertising Display & Signage

10-11



Kiosk & Smart Display

12-13



Camera & PTZ | Accessories

14



Interactive Flat Panel

Limitless Interactive


AI Powered Interactive Flat Panel:

Interactive displays built for collaborative learning and work. Featuring advanced AI-powered whiteboard capabilities, wireless casting, and precise touch responsiveness, these panels transform classrooms and meeting spaces. Intuitive annotation tools and screen mirroring enable seamless group engagement.



- | | | | |
|---|--|--|--|
|  40+ Point Touch |  Android 14 & Above |  Google EDLA |  WIFI-5/6 |
|  Zero Bonding Technology |  8 Array Microphones System |  Pressure Sensing Writing |  48 Megapixels AI Cam |

AI Features:

- | | | | |
|---|--|--|--|
|  | ABC Pen
Recognizes handwritten text and converts it into digital text. |  | Magic Pen
Recognizes and interprets hand drawn doodles |
|  | FX Pen
Recognizes mathematical expressions and equations. |  | Mind Map
Generate complex mind maps with the click of a button |

Powered By:  android  Windows Supports:  YouTube  Google Play  zoom

Specifications	Size	 65"	 75"	 86"	 98"	 110"
	Technology	CVTE/Lango/KTC	CVTE/Lango/KTC	CVTE/Lango/KTC	CVTE/Lango/KTC	CVTE/Lango/KTC
	Chipset	9679/ V100/311D2/3576	9679/ V100/311D2/3576	9679/ V100/311D2/3576	9679/ V100/311D2/3576	9679/ V100/311D2/3576
	Storage	8GB + 128GB/ 16GB + 256GB	8GB + 128GB/ 16GB + 256GB	8GB + 128GB/ 16GB + 256GB	8GB + 128GB/ 16GB + 256GB	8GB + 128GB/ 16GB + 256GB
	Color	Silver/Black	Silver/Black	Silver/Black	Silver/Black	Silver/Black
	Protection panel	4mm Anti glare tempered glass	4mm Anti glare tempered glass	Anti glare tempered glass	Anti glare tempered glass	Anti glare tempered glass
	Installation method	Mobile stand/wall mount	Mobile stand/wall mount	Mobile stand/wall mount	Mobile stand/wall mount	Mobile stand/wall mount

Liquid Crystal Display Panel	Screen scale	16:9	16:9	16:9	16:9	16:9
	Display brand	BOE/CSOT	BOE/CSOT	BOE/CSOT	BOE/CSOT	BOE/CSOT
	Display color	1.07B(8-bit+FRC)	1.07B(8-bit+FRC)	1.07B(8-bit+FRC)	1.07B(8-bit+FRC)	1.07B(8-bit+FRC)
	Resolution ratio	3840*2160	3840*2160	3840*2160	3840*2160	3840*2160
	Refresh rate	60Hz	60Hz	60Hz	60Hz	60Hz
	Luminance	≥ 400cd/m2	≥ 400cd/m2	≥ 450cd/m2	≥ 450cd/m2	≥ 500cd/m2
	Viewing angle	89/89/89/89 (Typ.)	89/89/89/89 (Typ.)	89/89/89/89 (Typ.)	89/89/89/89 (Typ.)	89/89/89/89 (Typ.)
	Contrast	1200: 1 (Typ.) (transmission)	1200: 1 (Typ.) (transmission)	1400: 1 (Typ.) (transmission)	1400: 1 (Typ.) (transmission)	1400: 1 (Typ.) (transmission)
	Backlight lifetime	≥ 30K Hours	≥ 30K Hours	≥ 30K Hours	≥ 30K Hours	≥ 30K Hours

Infrared Touch Screen	Touch type	Infrared touch	Infrared touch	Infrared touch	Infrared touch	Infrared touch
	Touch count	20 points	20 points	20 points	20 points	20 points
	Touch accuracy	±1mm	±1mm	±1mm	±1mm	±1mm
	Response time	≤ 4ms	≤ 4ms	≤ 4ms	≤ 4ms	≤ 4ms
	Identifiable object	Finger or stylus	Finger or stylus	Finger or stylus	Finger or stylus	Finger or stylus
	Transparency	≥ 85%	≥ 85%	≥ 85%	≥ 85%	≥ 85%
	Temperature range	Operating temp.: -10°C-60°C	Operating temp.: -10°C-60°C	Operating temp.: -10°C-60°C	Operating temp.: -10°C-60°C	Operating temp.: -10°C-60°C
	Operating voltage	DC 5V	DC 5V	DC 5V	DC 5V	DC 5V
	Power dissipation	1W-5W	1W-5W	1W-5W	1W-5W	1W-5W

Input/Output Devices & Features	Speakers	20 Watt x 2/ Optional Subwoofer	20 Watt x 2/ Optional Subwoofer	20 Watt x 2/ Optional Subwoofer	20 Watt x 2/ Optional Subwoofer	20 Watt x 2/ Optional Subwoofer
	Interface	HDMI x 3, VGA x 1, Front Ports (HDMI/ USB)	HDMI x 3, VGA x 1, Front Ports (HDMI/ USB)	HDMI x 3, VGA x 1, Front Ports (HDMI/ USB)	HDMI x 3, VGA x 1, Front Ports (HDMI/ USB)	HDMI x 3, VGA x 1, Front Ports (HDMI/ USB)
	Microphone	8 Array microphone with 10 m pickup range	8 Array microphone with 10 m pickup range	8 Array microphone with 10 m pickup range	8 Array microphone with 10 m pickup range	8 Array microphone with 10 m pickup range
	Camera	48 megapixels AI, 120 degrees wide Angle	48 megapixels AI, 120 degrees wide Angle	48 megapixels AI, 120 degrees wide Angle	48 megapixels AI, 120 degrees wide Angle	48 megapixels AI, 120 degrees wide Angle

Package	Net weight	≤ 40Kg	≤ 52Kg	≤ 65Kg	85KGS	110KG±5KG
	Gross weight	≤ 49kg	≤ 65kg	≤ 81kg	98KGS	144KG±5KG
	Bare machine size	1484*914.4 *97.3mm	1706.16*1039.53 *97.3mm	1952.4*1179.4 *97.3mm	1957*1160 *100mm	2499.6*1474.2 *95.5mm
	Package size	1582(L)*1002(H) *185(D)mm	1796(L)*1129(H)* 194(D)mm	2048(L)*1268(H) *194(D)mm	2360(L)*1430(H) *308(D)mm	2667(L)*1644(H) *230(D)mm

Gravity AI - Limitless Intelligence

Gravity AI transforms your interactive flat panel into a dynamic teaching assistant. Designed for the future of learning, it reads, writes, and thinks alongside you, helping educators save time, simplify complex ideas, and inspire curiosity. From smart handwriting recognition to real-time insights, Gravity AI adapts to your workflow, not the other way around.

Core Features:


Generate Lesson Plan:

Automatically generate comprehensive lesson plans for objectives.




Text summarize:

Take any text and summarize it with custom writing style.

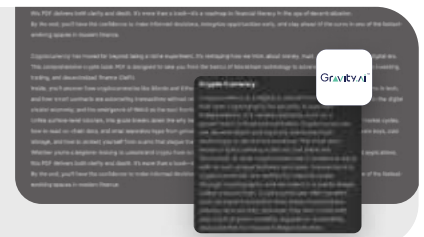

Research Assistant:

Find information and sources for a research project.

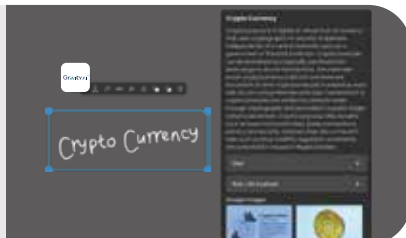


Rubric Builder:

Have AI write rubric for an assignment you are creating for your class in a table format.




Chat With Documents:

Upload documents and ask questions about their content.

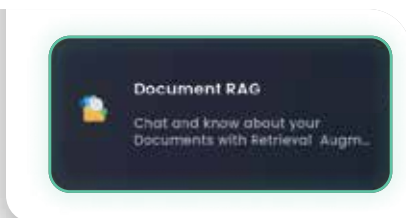

Create Shapes:

Transform drawings into precise shapes for effective teaching.

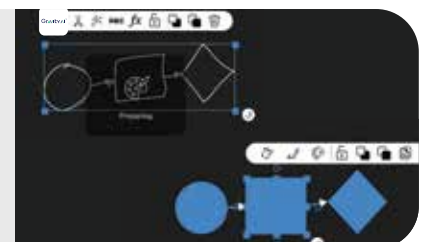

Interactive Learning Tools



Versatile Teaching Aids



Time Efficiency



Enhanced Student Engagement

Gravity AITM

Gravity AI empowers creativity, learning, and productivity - transforming classrooms, workflows, and ideas into intelligent, seamless, and limitless experiences that amplify human imagination and innovation.

All-In-One PC

Durable & high performing Qonevo All-In-One PC specially designed for computer lab & corporates, with multiple specifications & latest configuration Qonevo All-In-One PC stand ahead in the segment.

All-In-One PC Features:



4K Ultra HD
Image Quality



Built-In Hidden
Press Camera



Quick-Release
Base



Adjustable Height
and Angle

Specifications	Screen Size	23.8" 27"	Brightness	250cd/m ²
	Generation	12th - 14th	Static Contrast	3000:1
	Available Colors	Tarnish/Black/White	Panel Type	IPS
	Resolution	1920*1080p(23.8") 2560*1440p (27")	Top Interface	Press the hidden camera
	CPU	I5 / I7	Speakers	4Ω3W*2
	RAM	Upto 32GB	Storage	Upto 2TB
	Refresh Rate	≤ 60Hz-75Hz(23.8") 144Hz (27")		

OPS-PC

Qonevo OPS PC are designed to be fixed in slot of Interactive Flat Panels & power the same with computing(Windows) capabilities

Specifications	DDR4 Memory/RAM	4GB to 64GB
	Storage	128G to 2TB
	CPU	I3 I5 I7 Gen 12th to 13rd
	Slots	Inbuilt for Interactive Flat Panel



Powered By:



Active LED Display

Outdoor LED Display

High impact active LED displays deliver stunning brightness & rich color depth. Advanced thermal management & modular architecture ensure consistent performance in demanding conditions while scaling effortlessly.



Indoor LED Display

Active LED displays deliver vibrant color accuracy with flexible configurations for retail, events, & corporate spaces. Advanced thermal management ensures seamless performance while maintaining visual excellence.



Features:



High
Performance



Single Pixel
Calibration



Color Temperature &
Brightness Adjustable



160° Wide Viewing
Angle




≥100% NTSC Color
Gamut


Flexible LED Display:



Flexible Module

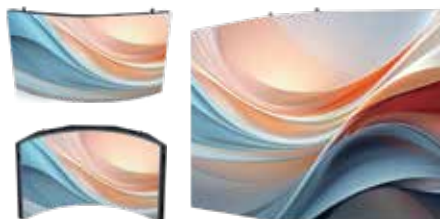

Ultra Sleek Design

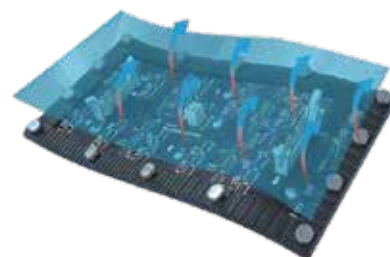

Heat Insulation and Flame Retardancy

Outdoor LED Display Specification	Item	QT0250	QT0307	QT0400	QT0500	QT0592	QT0800	QT1000
	Pixel Structure	SMT 3 in 1						
	Pixel Pitch (mm)	2.5	3.076	4	5	5.925	8	10
	Module Resolution (WxH)	128×64	104×52	80×40	64×32	52×27	40×20	32×16
	Module Size (mm) (WxH)	320×160						
	Module Weight (Kg)	0.45±0.05	0.45±0.05	0.43±0.05	0.41±0.05	0.42±0.05	0.42±0.05	0.42±0.05
	Unit Area (m²)	0.0512						
	Pixel Density (dots/m²)	160000	105625	62500	40000	27216	15625	10000
	White Balance Brightness (nits)	≥5000						
	Color Temperature (K)	3000~38000 adjustable						
	Horizontal Viewing Angle	160°						
	Vertical Viewing Angle	140°						
	Deviation from the Color Luminous Center	<3%						
	Brightness Uniformity	≥97%						
	Contrast Ratio	5000:1						
	Peak Power Consumption (W/m²)	≤660						
	Average Power Consumption (W/m²)	≤220						
	Power Supply Requirements (V)	DC:4.5						
	Single Module Current (A)	7.5A						
	Drive Mode (Constant current drive)	16S	13S	10S	8S	7S	4S	2S
	Frame Rate (Hz)	50&60						
	Refresh Rate (Hz)	≥7680						
	Typical Lifespan (hours)	Upto 100,000						
	Working Temperature Range (°C)	-20 ~ 40						
	Storage Temperature Range (°C)	-20 ~ 60						
	Working Humidity Range (RH)	10~80% no condensation						
	Storage Humidity Range (RH)	10~85% no condensation						

Indoor LED Display Specification	Parameter Item	QT0100	QT0125	QT0153	QT0186	QT0200	QT0250	QT0300	QT0400
	LED Configuration	SMT 3 in 1							
	Pixel Pitch (mm)	1	1.25	1.538	1.86	2	2.5	3.076	4
	Module Resolution (WxH)	320×160	256×128	208×104	172×86	160×80	128×64	104×52	80×40
	Module Size (mm) (WxH)	320×160							
	Module Weight (Kg)	0.39±0.05	0.39±0.05	0.39±0.05	0.39±0.05	0.38±0.05	0.37±0.05	0.39±0.05	0.39±0.05
	Module Area (m²)	0.0512							
	Pixel Density (dots/m²)	1,000,000	640,000	422500	288,906	250000	160000	105625	62500
	White Balance Brightness (nits)	≥500	≥500	≥500	≥500	≥500	430~450/ ≥600	500~550	≥600
	Color Temperature (K)	3000~38000 Adjustable							
	Horizontal Viewing Angle	160°							
	Vertical Viewing Angle	140°							
	Deviation of LED luminance Center	<3%							
	Brightness Uniformity	≥97%							
	Contrast Ratio	5000:1							
	Peak Power Consumption (W/m²)	≤440	≤440	≤352	≤352	≤352	≤230/ ≤396	≤308	≤370
	Avg Power Consumption (W/m²)	≤148	≤148	≤118	≤118	≤118	≤77 / ≤132	≤103	≤123
	Power Supply Requirements (V)	5	5	4	4	4	2.6 / 4.5	3.5	4
	Single Module Current (A)	DC:4.5	DC:4.5	DC:4.5	DC:4.5	DC:4.5	DC:4.5	DC:4.5	DC:4.5
	Drive Mode (Constant current drive)	54S	64S	52S	43S	40S	64S / 32S	52S	20S
	Frame Rate (Hz)	50&60							
	Refresh Rate (Hz)	≥3840							
	Lifetime (hrs)	Upto 100,000							
	Operation Temperature (°C)	-10 ~ 40							
	Storage Temperature (°C)	-20 ~ 60							
	Operation Humidity (RH)	10~80% no condensation							
	Storage Humidity (RH)	10~85% no condensation							

Active LED Display

Outdoor LED Display


High-brightness outdoor LEDs built for visibility, durability, and vibrant performance in any environment. Modular design and smart thermal control ensure reliability and effortless scalability.



Indoor LED Display


Precision color, sleek form, and flexible configurations for retail, events, and corporate spaces. Engineered for seamless visuals and consistent performance.



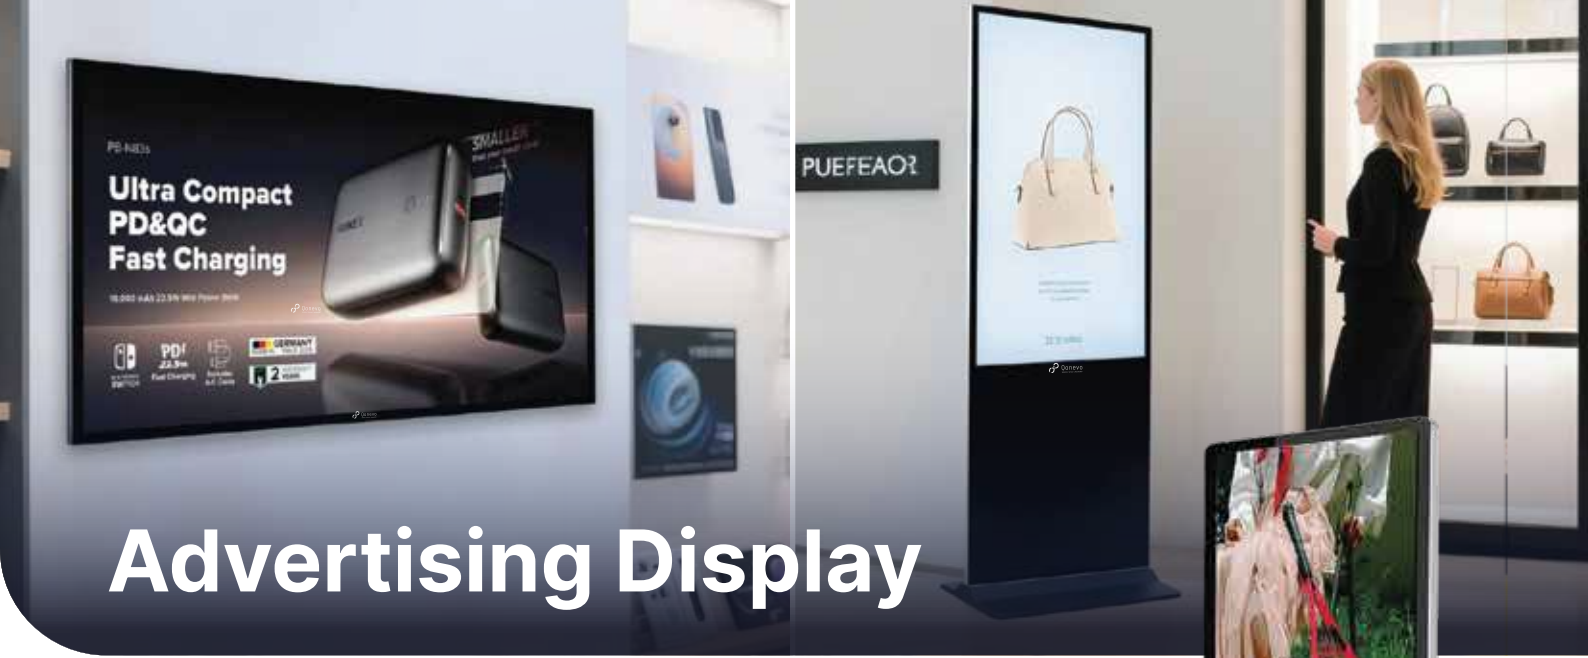

Advertising Display

Captivating content delivery for retail, transit, & corporate environments. Our advertising displays combine high brightness with superior color accuracy in flexible wall-mounted & freestanding configurations. Advanced scheduling systems & intuitive content management ensure dynamic engagement.

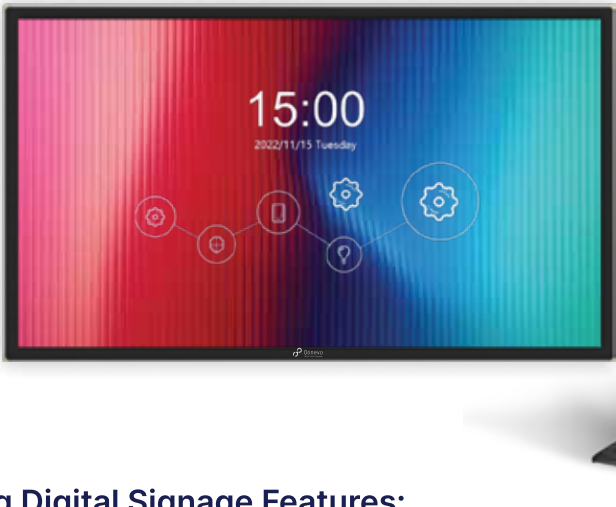

Wall Mounted & Floor Standing Digital Signage Features:

Remote Publishing

178° Wide Viewing Angle

USB Plug & Play

Timing Switch

Smart Split Screen Layout

Display	Backlight	ELED	H: ELED<43inches /DLED 65 inches or more V: ELED<65inches /DLED 65 inches or more	
	Resolution	3840*2160 4K UHD display	Viewing Angle	176 *176 Full viewing Angle
	Response Time	≤ 5ms	Document Presentation	16:9 / 9:16
	Brightness	350cd/ m² (optional 500cd/m² / 700cd/m²)		
Look	Type	Horizontal Vertical	Tempered Glass	4mm
	Frame	All-metal body ultra-thin design		
Power	Power Input	AC 100V-240V50-60 HZ	Standby Power Consumption	<0.5W
	Speaker	10WX 2	Functional Interface	RJ45, USB, TFCard, HDMIIn. Earphone out
System	CPU	I3, I5, and I7 configurations are available	Single Machine	Selectable
	Android (Standard)	H: Available in 2+16G/4+32G Config. V: Available in 1+8G/2+8G/2+16G Config.		
	Touching Function	Nontouch, Infrared touch, Capacitive touch(Optional)	Operating System	Without OS, android, window(Optional)

H: Horizontal Type(Wall Mounted Digital Signage) | V: Vertical Type(Floor Standing Digital Signage)

Signage

From indoor directories to outdoor wayfinding, our signage solutions deliver visual clarity and architectural elegance. Engineered to perform across varied lighting conditions with comprehensive connectivity options and customizable layouts.

Signage Features:

			
Liquid Crystal Panel	2K/4K Display	Single-Screen or Split-Screen Display	U disk/Wi-Fi/4G smart release
			
Anti-riot/anti-theft design	Commercial Grade Battery	Rain & Sun Protection	Android /Windows Multi-System

Display	Backlight Source	ELED	Viewing Angle	178*178 full view		
	Resolution	1920*1080	Display Ratio	16:9		
	Brightness	Original 700cd/m² 1500cd/m²				
Look	Frame	All-metal body ultra-thin design	Customization	Supports color and LOGO		
	Tempered Glass	4mm high-quality high transparency				
System	CPU	Cortex-A7 architecture, 1.2GHz	Built-in Memory	Supports up to 32GB of TF card expansion		
	Internal Storage	DDR31G	Decoding Resolution	Supports up to 1080P		
	Operating System	Android 7.1.1	Network Support	3G/4G network, Ethernet, WiFi, wireless peripheral expansion		
	USB2.0 Port	2 USBHOSTstandard ports, 2 USB expansion ports	System Upgrade	Supports USB, SD card, and remote upgrades.		
Feature	Charging Time	7 Hours	Battery Capacity	50000mAh	Power	110W
	Battery Life	14 Hours	Voltage	25.2V	Energy Efficiency	1088.54Wh

Kiosk

Self-service excellence for high-traffic environments. Our kiosks deliver smooth interaction across retail, campus & corporate settings. With secure payment processing, intuitive interfaces & rugged construction, they streamline transactions while maintaining premium brand experience.



Kiosk Features:



Wireless Wi-Fi 5/6

1080

1920*1080P



Color Gamut NTSC≥72%



Long Standby



Smart Chip



Multiple Touch Gestures



10 Points Touch



Android/Windows

Display	Backlight	ELED	Remarks	ELED<65inches /DLED 65 inches or more
	Resolution	1920*1080/3840*2160 4K UHD display	Viewing Angle	176 °176 Full Viewing Angle
	Response Time	≤ 5ms	Document Presentation	16:9
	Brightness	350cd/ m ²	Touch Control	Infrared touch/Capactive Touch Optional
Look	Type	Vertical	Tempered glass	3mm
	Frame	All-metal body ultra-thin design		
Power	Power Input	AC 100V-240V50-60 HZ	Standby Power Consumption	<0.5W
	Speaker	10WX 2	Functional Interface	RJ45, USB, TFCard, HDMIIn. Earphone out
System	CPU	I3, I5, and I7 configurations are available	Single Machine	Selectable
	Android (Standard)	Available in 1+8G/2+8G/2+16G configurations		



Smart Display

Dynamic versatility meets seamless integration. Our smart displays rotate 360 degrees to adapt to any presentation format while supporting wireless projection from multiple devices and responsive touch interaction.



Smart Display Features:



Touch Screen Display



Versatile Design



4 Hours Battery Backup



Go Wireless

More Features:



Stereo Bass Speaker
Enhances sound with deep, immersive bass and clarity.



Universal Roll
Adaptable to different uses.



Fully adjustable
For optimal performance and comfort.

Specifications	Sizes Available	27" 32"	Brightness	350 nits
	Wireless Project	Supported	Up and Down Lift	180 mm
	Battery Endurance	About 4-6 hours	Refresh Rate	Upto 40-75 Hz
	Document Presentation	Supported	Color Gamut	100% sRGB
	Resolution	1920 × 1080	Response Time	≤ 8 ms
	Mainboard Solution	MTK8788 / MTK8183 / RK3576	Viewing Angle	178° / 178°
	Contrast Ratio	1000:1	Touch Points	10-point touch
	Touch Tools	Fingers, touch pens, etc.	Color Depth	16.7M
	Touch Technology	P-Cap touch		
Power	Input Voltage	100-240V AC 50/60HZ	Full Battery Life	4H
	Standby Consumption	<0.5W	Power ON Consumption	≤60w
	Power In	13.5V6A	Speaker Consumption	6Ω10W*2
	Built-in Battery Capacity	10000mAh/111Wh		

Camera & PTZ

Conference cameras provide crystal-clear imaging with wide-angle lenses & low-light correction for seamless video conferencing & hybrid meetings. PTZ cameras add intelligent versatility with motorized pan, tilt, & zoom capabilities plus AI-powered speaker tracking for large presentations & dynamic environments. Both integrate effortlessly with collaboration platforms, ensuring broadcast-quality visuals & reliable performance in any meeting space.

Conference Camera:



PTZ Camera:




Accessories

Precision peripherals that extend capability and comfort. Our stylus ensures accurate interaction on touch displays with responsive feedback. Modular slider and stand systems adapt to any installation requirement. Each accessory reflects our commitment to craftsmanship, durability, and seamless integration, enabling displays to perform exactly as intended.

Stand:



Slider:

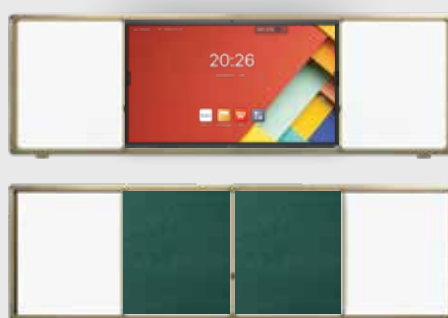

Stylus:



Synergy.

INTEGRATION
TRADING LLC



United in Innovation, Committed to Excellence

Synergy Integration Trading LLC

- 📍 The Exchange Tower, Business Bay,
Dubai, United Arab Emirates
- 🌐 www.synergyintegration.ae
- ☎ +971 54 719 5983 | +971 56 929 5235

