

SHALL implement PAFTP. A MATTERoPAF Interface SHALL only be used to transport Matter messages as PAFTP SDU.

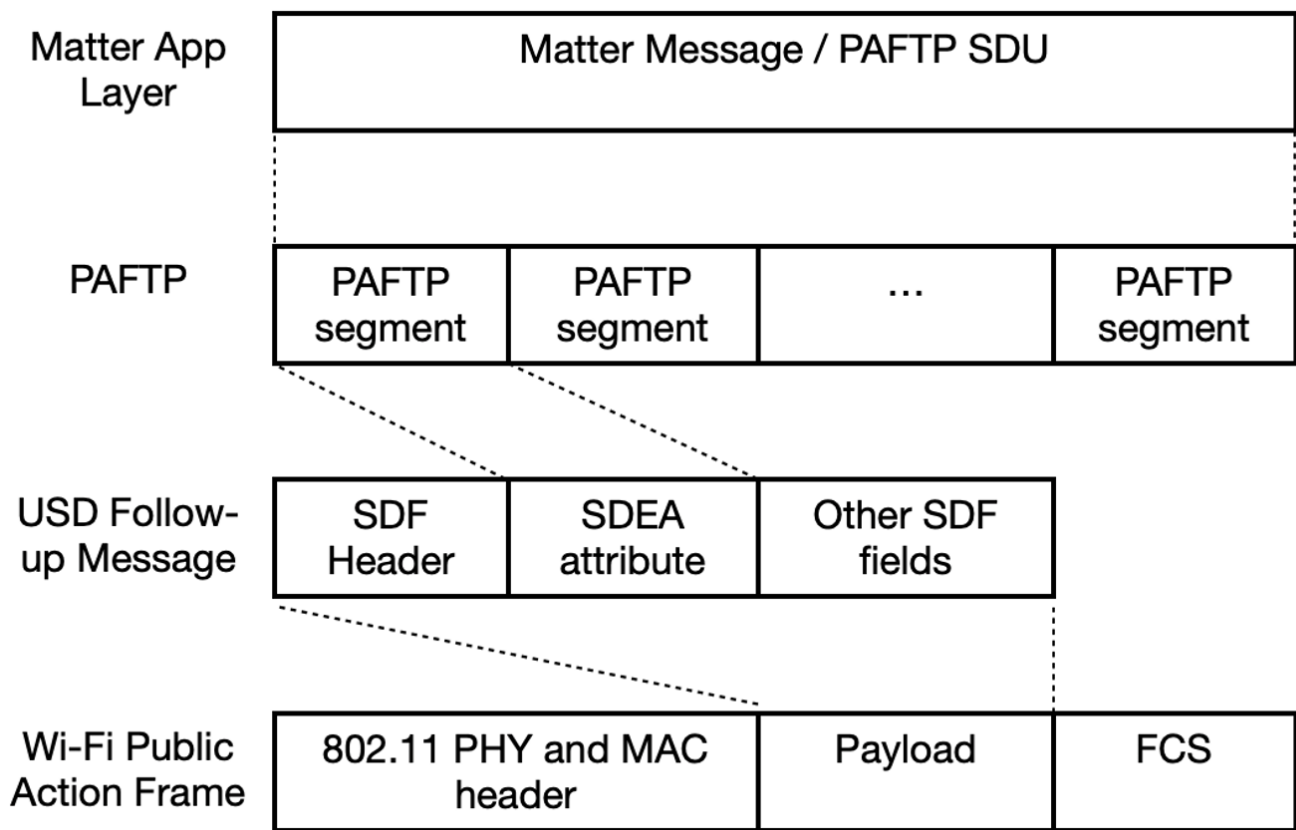


Figure 29. MATTERoPAF: Matter Message / PAFTP layering

The PAFTP session handshake allows devices to check PAFTP protocol version compatibility and exchange other data before a PAFTP session is established. Once established, this session is used to send and receive PAFTP SDUs (such as Matter messages) as PAFTP Message Segments. A PAFTP session MAY open and close with no effect on the state of the underlying WFA-USD connection, except in the case where a PAFTP session is closed by the Commissionable Device. Either the Commissionable Device or the Commissioner MAY signal the end of a PAFTP session by closing the underlying WFA-USD connection.

Due chiefly to constraints put on design by resource-limited Wi-Fi chipsets supporting WFA-USD, PAFTP defines a receive window for each side of a session in units of WFA-USD Follow-up message PDUs. Each WFA-USD Follow-up message PDU is sent with a sequence number which the receiver uses to acknowledge receipt of each packet at the PAFTP layer and open its receive window from the sender’s perspective.

4.20.1. PAFTP Session Interface

Conceptually, an open PAFTP session is exposed to the next-higher session layer as a full-duplex message stream.

4.20.2. PAFTP Frame Format

The PAFTP frame format is identical to BTP frame format as shown in Table 28, “BTP Packet PDU format”. A PAFTP Frame consists of an 8-bit header followed by one or more optional fields. PAFTP