

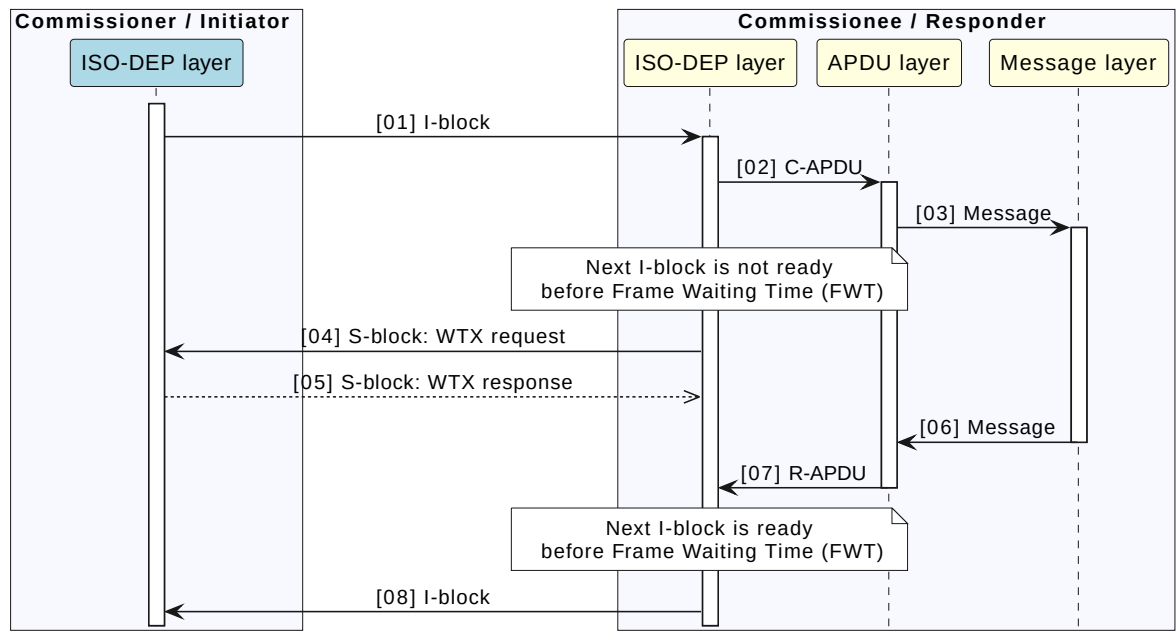


Figure 40. ISO-DEP Waiting time extension

The ISO-DEP protocol also features retransmission when a frame is not received or incorrectly received, making it a reliable transport protocol.

4.21.4. APDU layer

The APDU layer encapsulates Matter messages into APDUs conforming to [ISO/IEC 7816-4](#). It provides a datagram-oriented transport interface tunneled over encapsulation in a series of command requests and their associated responses.

For this purpose, the following commands are used:

Table 43. APDU commands used in NTL

Class	Commands
Interindustry	SELECT, GET RESPONSE
Proprietary	TRANSPORT

The commands (C-APDU) are always issued by the NFC Reader/Writer which is the Matter commissioner, and the responses (R-APDU) are always issued by the NFC Listener which is the Matter commissionee.

R-APDU always embeds a status code, and optionally a response payload.

Some smartphone NFC Reader/Writer implementations are limited to a maximum 256-byte APDU payload, which is insufficient to transfer Matter messages required for commissioning. To guarantee interoperability with all NFC Readers/Writers while limiting the number of cases to support, both the NFC Reader/Writer and NFC listener SHALL always use short field coding (aka short length field) of APDUs.

Both commissionee and commissioner SHALL support C-APDU and R-APDU chaining specified in [ISO/IEC 7816-4](#).