

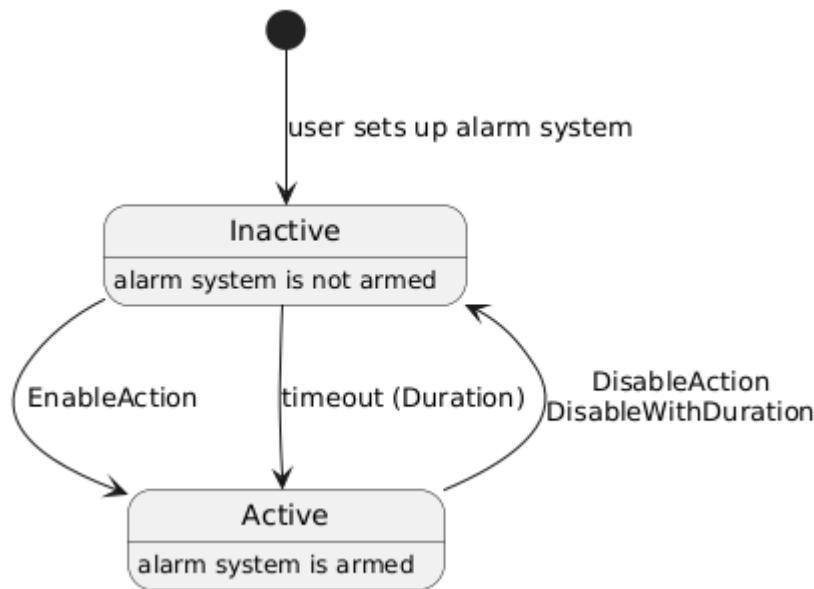


Figure 76. State diagram for example 'alarm system'

9.15. Intermittently Connected Devices Behavior

9.15.1. ICD Server Behavior

9.15.1.1. Operational States

Idle Mode

Idle Mode defines the operational state of an ICD where the node is unreachable due to it not being able to receive messages for a certain period of time. The ICD will remain in Idle Mode for a maximum of one [Idle Mode Duration](#) as defined in the [ICD Management cluster](#).

Slow Polling

When in **Idle Mode**, the ICD SHALL configure its network interface in *Slow Polling*. *Slow Polling* defines the fastest frequency at which the device will typically receive messages in Idle Mode. The [Slow Polling](#) interval MAY be the same as the [Idle Mode Duration](#).

Active Mode

Active Mode defines the operational state of an ICD where it is reachable on the network and will answer in a timely manner. The minimum amount of time a device will typically remain in Active Mode is [Active Mode Duration](#) as defined in the [ICD Management cluster](#).

Fast Polling

When in **Active Mode**, the ICD SHALL configure its network interface in *Fast Polling*. *Fast Polling* defines the fastest frequency at which the device can receive messages in Active Mode.

Operational State Switch

Some of the reasons why an ICD can switch Operational states from Idle Mode to Active Mode are: