

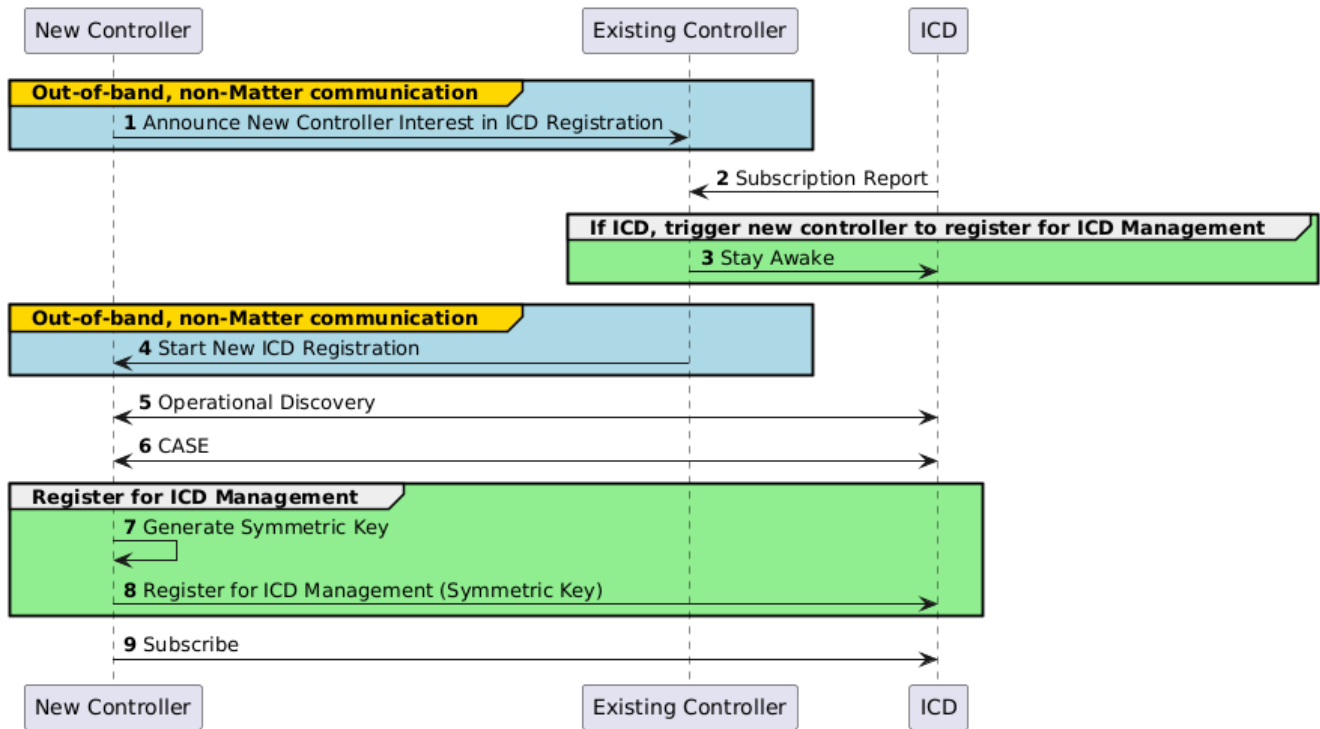


Figure 83. Infrastructure Assisted On-Demand Registration

Assisted Proxy Registration

Alternatively, instead of the new controller receiving notification when an ICD wakes up, an existing controller could be requested to register the new controller when an ICD checks-in. In this way, the existing controller acts as a proxy to register on behalf of the new controller. This requires a queuing or caching mechanism in the existing controller.

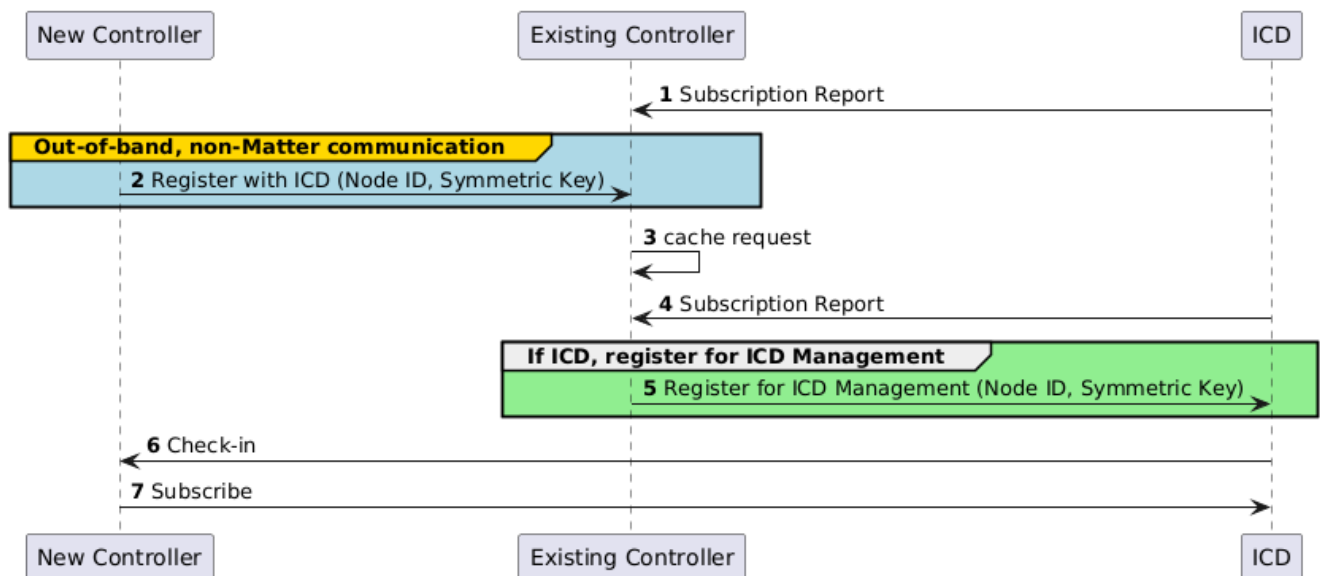


Figure 84. Infrastructure Assisted Proxy Registration

Client Registration upon ICD Upgrade

When a device upgrades to become ICD capable per [Section 9.15.2.5.2, “Asynchronous Interactions”](#), a client SHOULD register with the device using procedure described in [Section 9.15.2.2, “Registration Processes”](#).