

Cluster ID	Cluster Name	Description
0x0B01	Meter Identification	Attributes for advanced utility metering device information
0x0700	Commodity Tariff	Attributes for commodity tariff reporting
0x0B07	Commodity Metering	Attributes for commodity metering
0x00A0	Electrical Grid Conditions	Attributes for reporting conditions on the electricity grid

9.2. Device Energy Management Cluster

This cluster allows a client to manage the power draw of a device. An example of such a client could be an Energy Management System (EMS) which controls an Energy Smart Appliance (ESA).

In most deployments the EMS will be the client, and the ESA will host the Device Energy Management Cluster server.

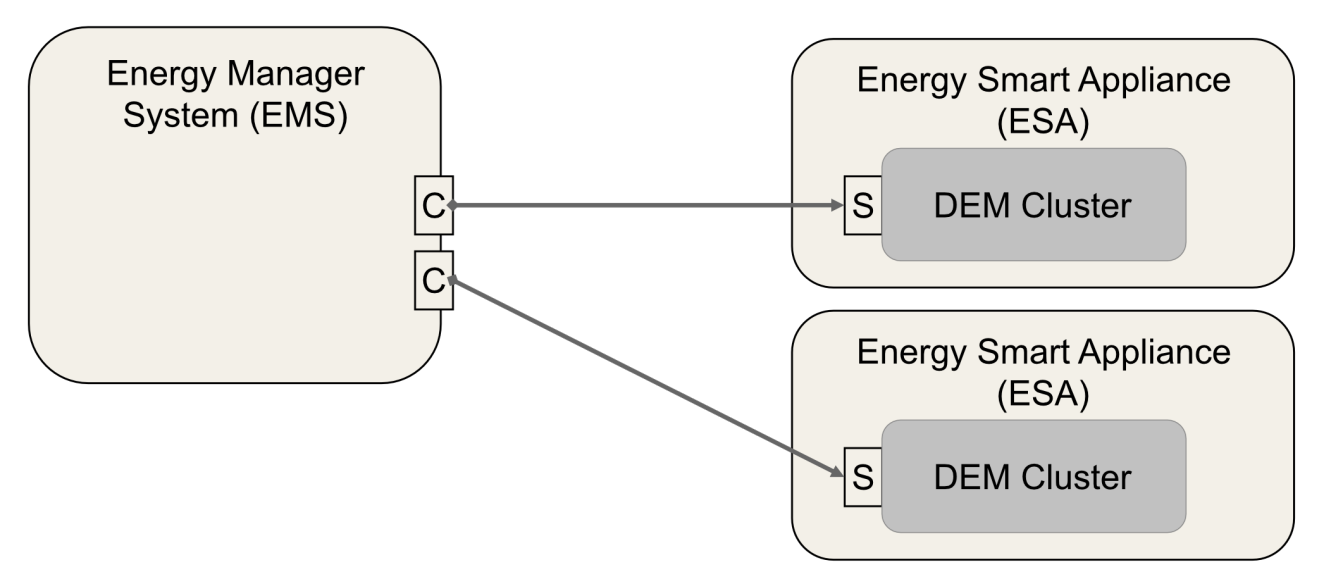


Figure 19. Example of the how an EMS is a client of multiple ESAs Device Energy Management clusters.

This cluster is intended to be generic in nature and could apply to any electrical load or generator (e.g. a Battery Electric Storage System - BESS, solar PV inverter, EVSE, HVAC, heat pump, hot water heater, white goods appliances etc).

It consists of the following areas which SHALL be supported by all devices implementing this cluster:

- Description of ESA and its capabilities & power limits (sometimes referred to as a nameplate)
- Current state of operation (including user opt-out, safety limitations / alarms)

There are some optional capabilities that some ESAs may be able to offer: