

- Ability to control the load or generation
- Forecast data, including when it can be flexible (i.e. modify the power or time period)
- The ability to have their power profile adjusted by an EMS, and to provide an updated Forecast back to the EMS.

This allows the EMS to manage multiple home loads and where ESAs can be flexible, continuously optimizing the home energy to minimize cost, reduce CO2 impact, maximize self-consumption of solar PV and provide Demand Side Response (DSR) Grid services.

It is likely that the ESA may also use the Pricing Cluster to obtain incentive signals such as 'grid carbon intensity', 'time of use' or 'type of use' tariffs to schedule its operation to run at the cheapest and greenest times.

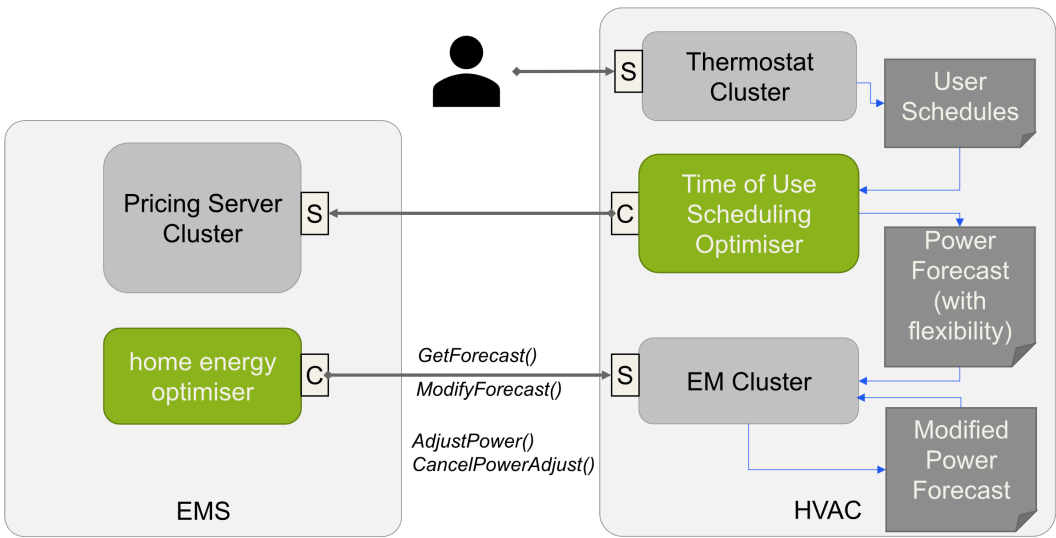


Figure 20. Example of the how an HVAC may use multiple clusters

NOTE

Grid Services are market dependent and will use other protocols ([[OpenADR](#)] / [[IEEE2030.5](#)]) to communicate grid events to the EMS. These are outside the scope of Matter.

NOTE

Different markets may follow different approaches, but the UK [[PAS1878](#)] and [[EUCodeOfConduct](#)] give examples of how ESAs may be mandated to support these features in the future.

9.2.1. Revision History

The global ClusterRevision attribute value SHALL be the highest revision number in the table below.

Revision	Description
1	Initial revision
2	Updates after 0.7 Ballot review
3	Updates to match cluster spec updates