

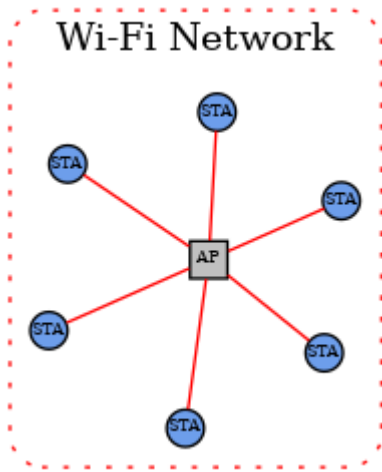


Figure 4. Single Wi-Fi network

In the single network topology, all Matter devices are connected to a single logical network. This could be a Thread/802.15.4 network, a Wi-Fi network or an Ethernet network. In the case of Wi-Fi/Ethernet, the network could in fact span multiple Wi-Fi and/or Ethernet segments provided that all the segments are bridged at the link layer. A Node is a single instance of a Matter device within a fabric, operationally available on an IP network.

Each Node in the single-network topology communicates with every other Node in the Fabric via a single network interface.

2.3.2. Star network topology

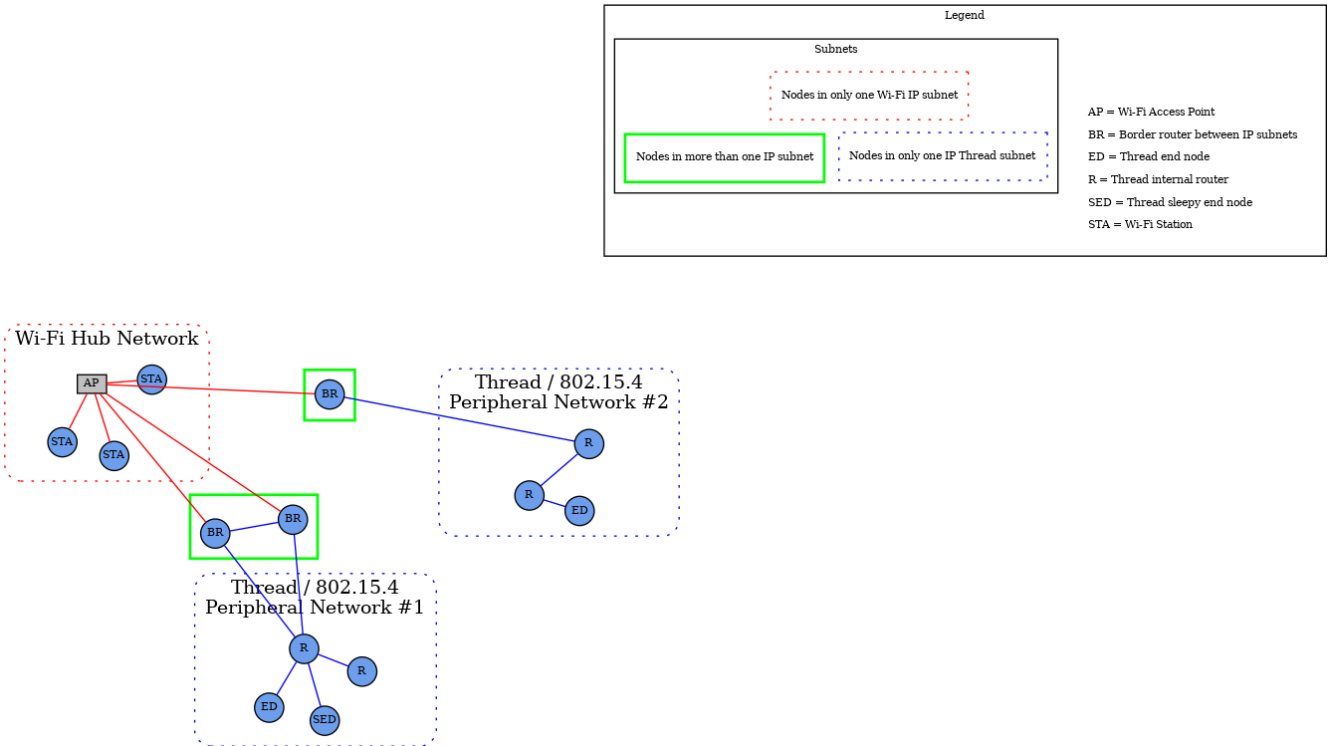


Figure 5. Star network topology

The star network topology consists of multiple peripheral networks joined together by a central hub network. The hub network will typically be the customer’s home network (Wi-Fi/Ethernet network), while the peripheral networks can be of any supported network type. A peripheral network SHALL always be joined directly to the hub network via one or more Border Routers.