

- reassembly as needed. [BTP](#) is provided as a transport protocol for commissioning using a BLE interface.
- [PAFTP](#) transports each message over [WFA-USD](#) as a separate SDU, performing segmentation and reassembly as needed. [PAFTP](#) is provided as a transport protocol for commissioning using a Wi-Fi interface.
 - [NFC Transport Layer \(NTL\)](#) transports each message by encapsulating it into one or more chained ISO/IEC 7816-4 command-response pairs. [NFC Transport Layer \(NTL\)](#) is provided as a transport protocol for commissioning using an NFC interface.

TCP and [MRP \(UDP with added reliability\)](#) are provided as transport protocols for operational messaging.

Transports based on [PAFTP](#), [NTL](#), and [BTP](#) are provided as temporary transports for the purpose of commissioning devices onto an operational IP network. They MAY additionally be used for other temporary non-operational messaging, i.e., exceptional conditions, maintenance, debugging and efforts focused on getting the Device into normal operation on an IP network. Examples of such non-operational messaging include [Network Recovery](#), [OTA](#) and retrieving [Diagnostic Logs](#). Support of these transports for such temporary non-operational messaging is optional for both Commissioners/Administrators and Devices. These transports are not intended for operational messaging.

4.1.1.3. Message Exchanges

Messages provide an [Exchange Layer](#) to track related messages that make up small, discrete transactions. The Exchange Layer provides this transaction tracking facility to the [Interaction Model Layer](#) above, providing a means to multiplex multiple such concurrent transactions over a given underlying session. The Exchange Layer also integrates the [Message Reliability Protocol \(MRP\)](#) as a service for use over UDP transports. This Message Layer architecture is shown below in [Figure 6](#), “[Message Layer Stack](#)”:

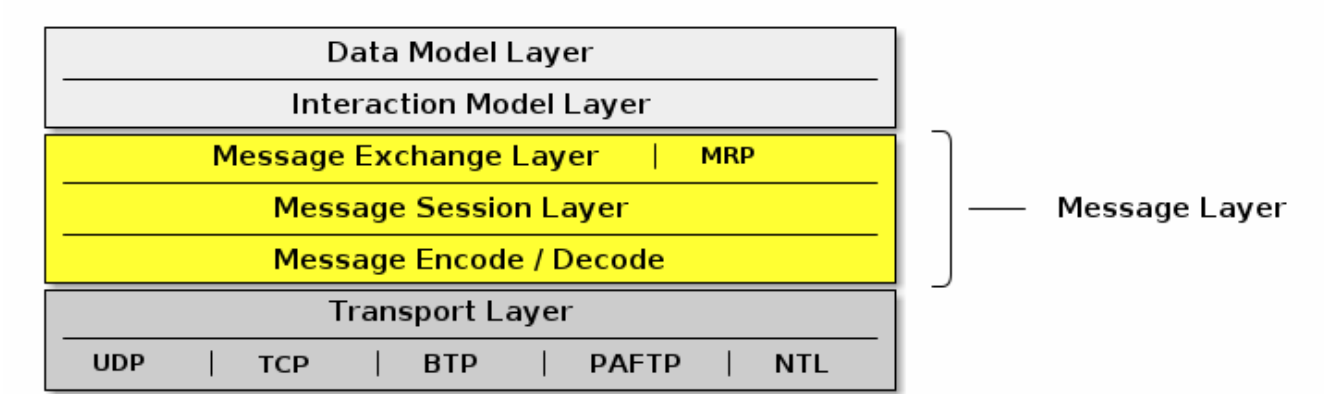


Figure 6. Message Layer Stack

4.2. IPv6 Reachability

This section describes IPv6 network configuration requirements to enable IPv6 reachability between Nodes. As described in [Section 2.3, “Network Topology”](#), a Matter network may be composed of one or more IPv6 networks.