

Constant Name	Description	Default
PAFTP_ACK_TIMEOUT	The maximum amount of time after receipt of a segment before a stand-alone ACK must be sent.	15 seconds
PAFTP_CONN_IDLE_TIMEOUT	The maximum amount of time no unique data has been sent over a PAFTP session before the Commissioner must close the PAFTP session.	30 seconds

4.21. NFC Transport Layer (NTL)

The NFC Transport Layer (NTL) defines how to transfer Matter commissioning messages over an NFC interface.

NOTE	NTL is only used when performing device commissioning over an NFC interface (referred as NFC-based Commissioning). NTL is not used for the reading of the Onboarding Payload from an NFC Tag.
NOTE	Support for NFC Transport Layer and all features that requires its use is provisional.

Messages are embedded into Application Programming Data Units (APDU) in compliance with [ISO/IEC 7816-4](#). These APDUs are transferred in blocks according to the ISO-DEP protocol as defined in [NFC Forum Digital Specification](#). Each block is transmitted wirelessly using NFC-A technology as defined in [NFC Forum Digital Specification](#).

The layering inside NTL is shown in [NFC Transport Layer stack](#), and described in following sections.

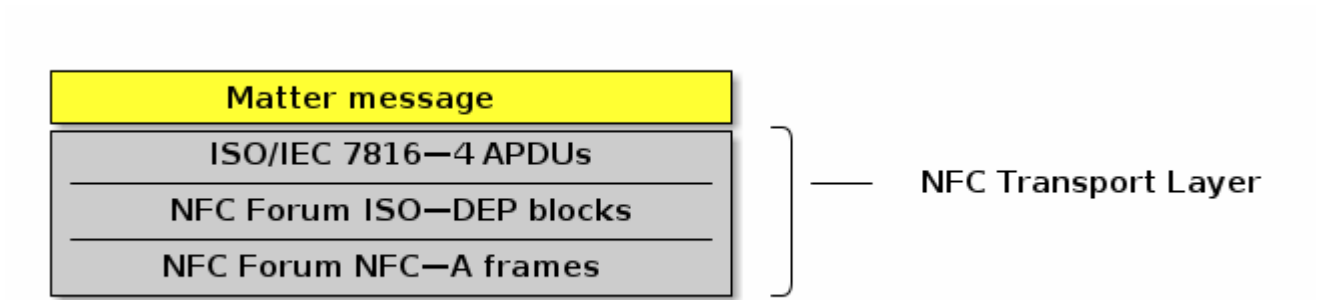


Figure 36. NFC Transport Layer stack

NTL provides a reliable, datagram-oriented, transport interface with asymmetric roles: one end always transmits first, and the other end always responds. When NTL is used for Matter commissioning, the Commissioner always transmits first and the Commissionee responds.

4.21.1. NFC Forum requirements

Because NTL relies on correct implementation of NFC Forum specification: