

- products implementing NTL as a Commissioner SHALL comply with the NFC Forum requirements for an NFC Forum Reader/Writer Module supporting Type 4A Tag Operation,
- products implementing NTL as a Commissionee SHALL comply with the NFC Forum requirements for either NFC Forum Type 4A Tag Module or NFC Forum Type 4A Tag Platform Module (Card Emulation).

NOTE

Corresponding NFC Forum Devices eligible to receive the NFC Forum Certification Mark are defined in [NFC Forum Devices Requirements](#).

4.21.2. NFC-A technology

Commissioners supporting NTL SHALL act as an NFC Forum Type 4A Tag Platform in Poll Mode as defined in [NFC Forum Digital Specification](#).

Commissionees supporting NTL SHALL act as an NFC Forum Type 4A Tag Platform in Listen Mode as defined in [NFC Forum Digital Specification](#).

4.21.3. ISO-DEP

ISO-DEP is a half-duplex block transmission protocol providing retransmission and chaining features.

The full ISO-DEP protocol SHALL be implemented in compliance with [NFC Forum Digital Specification](#).

This section highlights some features of the ISO-DEP protocol in the context of Matter communication for information.

During NFC protocol activation, the NFC Reader Device sends a RATS frame in which the maximum frame size it can receive (FSD) is coded, and the NFC Tag Device sends an ATS frame in which the maximum frame size it can received (FSC) is coded.

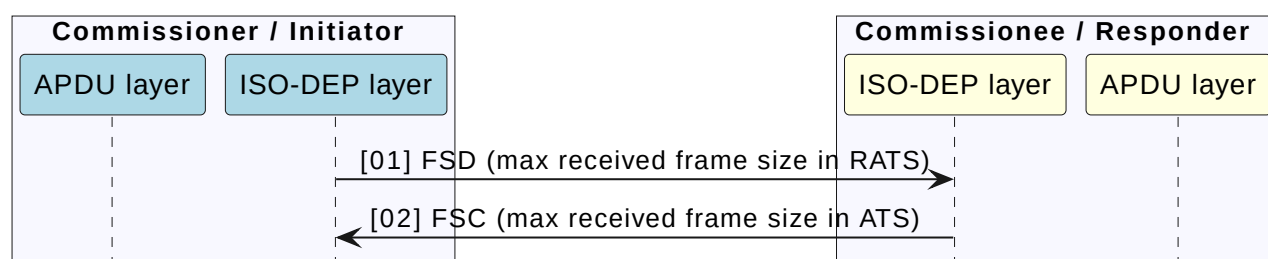


Figure 37. ISO-DEP protocol activation

This information is used by the ISO-DEP layer to segment the APDU to transmit, utilizing the ISO-DEP chaining feature. On the receiver side, the ISO-DEP layer takes care of re-assembling the chained segments.