

and/or a user.

- When the Duplicate condition applies, clients SHOULD disambiguate the relevant sibling endpoints in their user interfaces and client logic using the method defined in the device type or the TagList attribute values if no other method is defined.

For example: If the Duplicate condition applies to child endpoints of an Aggregator endpoint that represent multiple independent bridged devices, the endpoints make available metadata to allow a client to disambiguate distinct bridged devices with an overlap in application device types. Typically this is done using the NodeLabel attribute of the Bridged Device Basic Information cluster - thus reusing the naming information which the bridge already has to allow disambiguation to the user when using a direct user interface to the bridge.

For instance: The Aggregator in [this example](#), exposes several Color Temperature Lights (endpoints 13 and 22) which are disambiguated with their NodeLabel. Note that the compound device at endpoints 24, 25 and 26 also uses a TagList since, for this case, the bridge knows the lighting direction of both elements of the compound device.

Another example: The following diagram (copied from Chapter 10 of the Device Library) shows a Video Player device containing 3 separate Content Apps on endpoints 21, 31 and 41 which are disambiguated using the ApplicationName attribute of the Application Basic cluster on these endpoints.

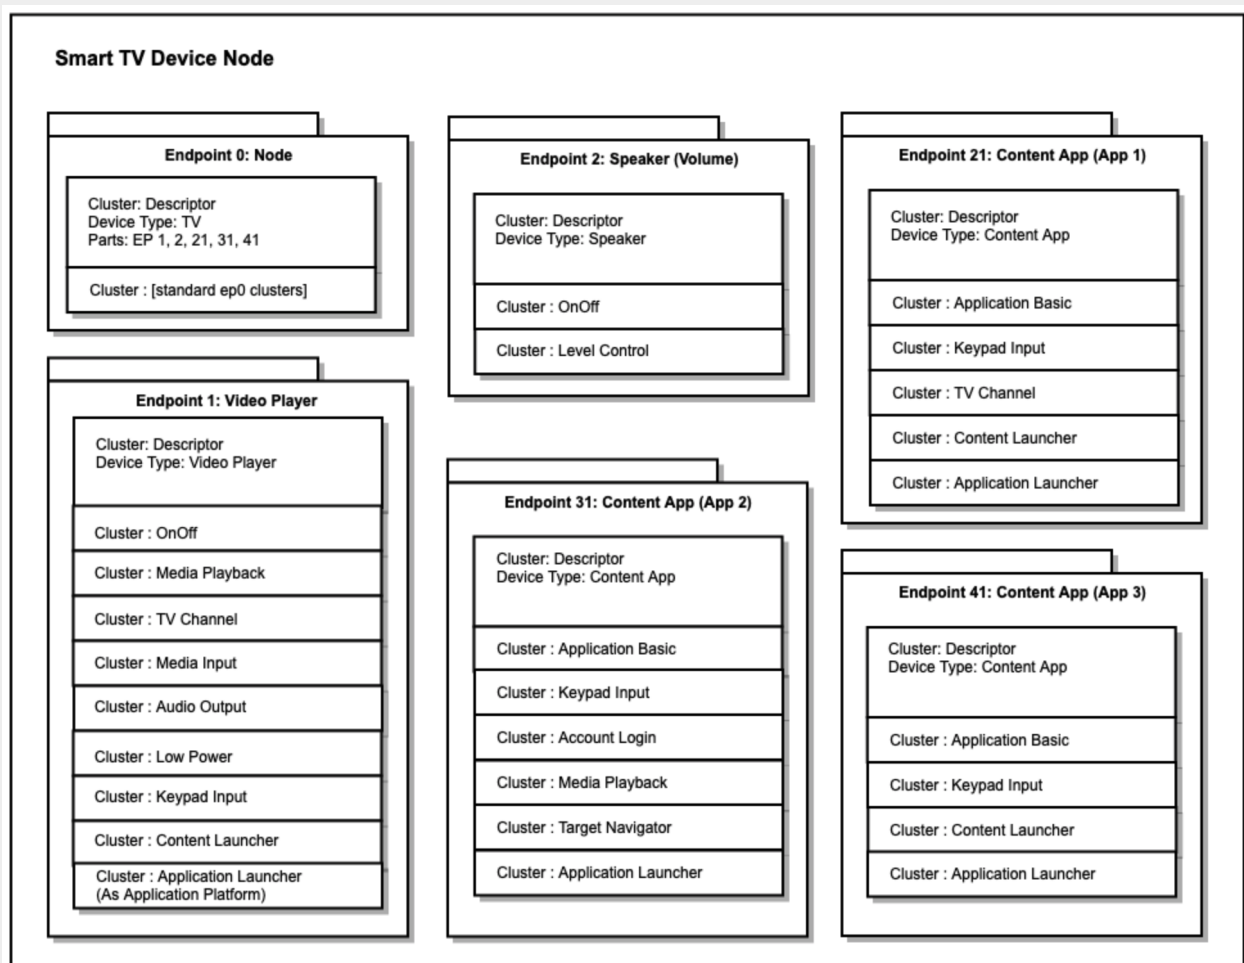


Figure 60. Endpoint Composition for Video Player Device