

9.12. Bridge for non-Matter devices

9.12.1. Introduction

A Bridge serves to allow the use of non-Matter IoT devices (e.g. devices on a Zigbee or Z-Wave network, or any other non-Matter connectivity technology) in a Matter Fabric, with the goal to enable the consumer to keep using these non-Matter devices together with their Matter devices.

This is illustrated in the figure below: the non-Matter devices are exposed as Bridged Devices to Nodes on the Fabric. The Matter Nodes can communicate with both the (native) Matter devices as well as the Bridged Devices (by virtue of the Bridge which performs the translation between Matter and the other protocol).

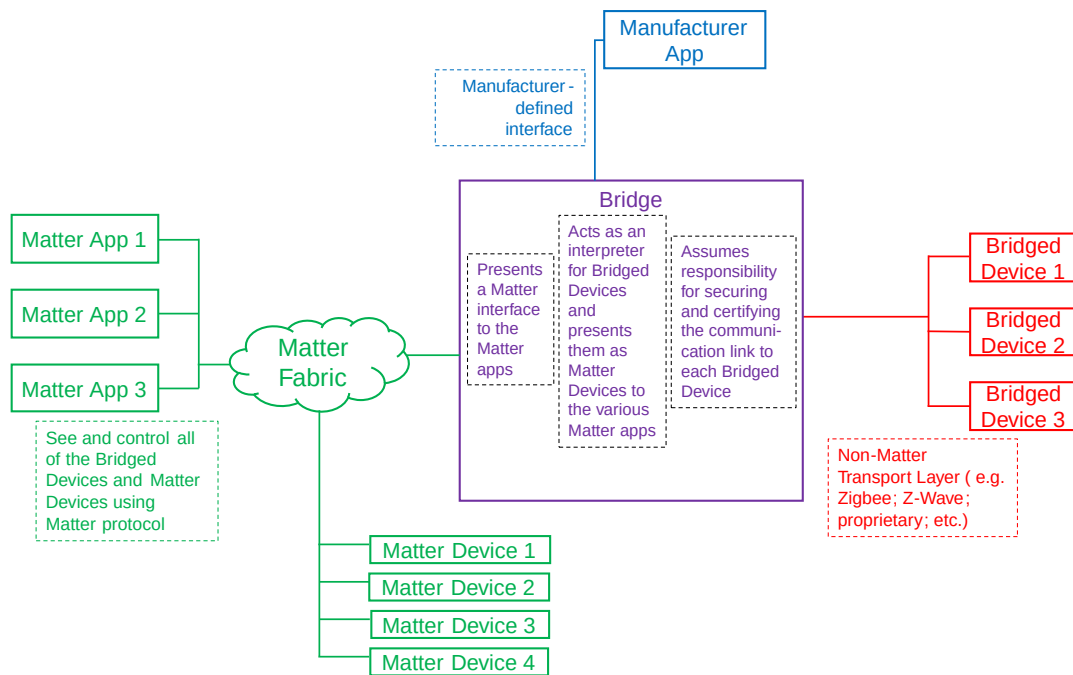


Figure 63. principle of bridging

NOTE

The bridging-concept described here is NOT intended to be used to expose Matter Nodes (which are not on the Fabric) to a Fabric, since direct connection of those Matter Nodes to the Fabric would provide a better experience.

This section will describe how the Data Model concepts can be used by a Bridge to expose the Bridged Devices in such a way that they can be discovered and used by Nodes on the Matter Fabric.

9.12.2. Exposing functionality and metadata of Bridged Devices

After Commissioning, the Bridge SHALL expose (at least) one Node to the Fabric. The device implementing the Bridge MAY have more than one Node. This, however, is orthogonal to the bridging concept and will not be discussed further here.

- On this Node, the Bridge SHALL expose a set of endpoints representing the various Bridged Devices on the non-Matter side of the Bridge.