

- Additionally, it SHALL expose an endpoint with the device type **Aggregator** which has a **Descriptor** cluster with a **PartsList** attribute containing all the endpoints representing those Bridged Devices.
- Each Bridged Device is represented by one or more endpoints listed in this **PartsList** (see [Section 9.12.2.3, “Information about Bridged Devices”](#) and examples below). The **Descriptor** cluster on the corresponding endpoint provides information about the particular Bridged Device, such as its device type(s).

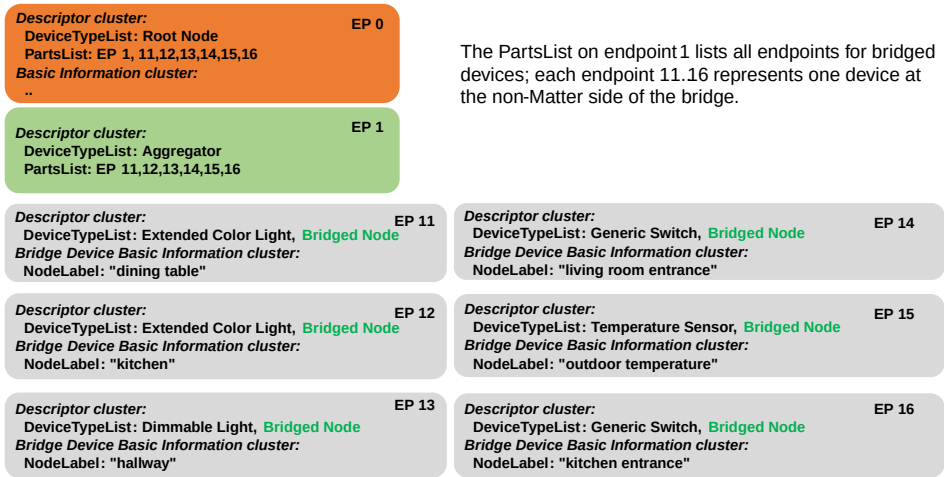


Figure 64. example of endpoints representing Bridged Devices

In case the Bridge is bridging to/from multiple technologies (or has some other logical distinction between groups of bridged devices), it MAY expose such groups as two or more such hierarchical trees each with their **Aggregator** device type (e.g. one for each technology, see figure below); it MAY also combine all bridged devices in one hierarchical tree (see figure above). Both figures have the same set of bridged devices - the difference is in how the bridge manufacturer decides to expose them as one or multiple sets.

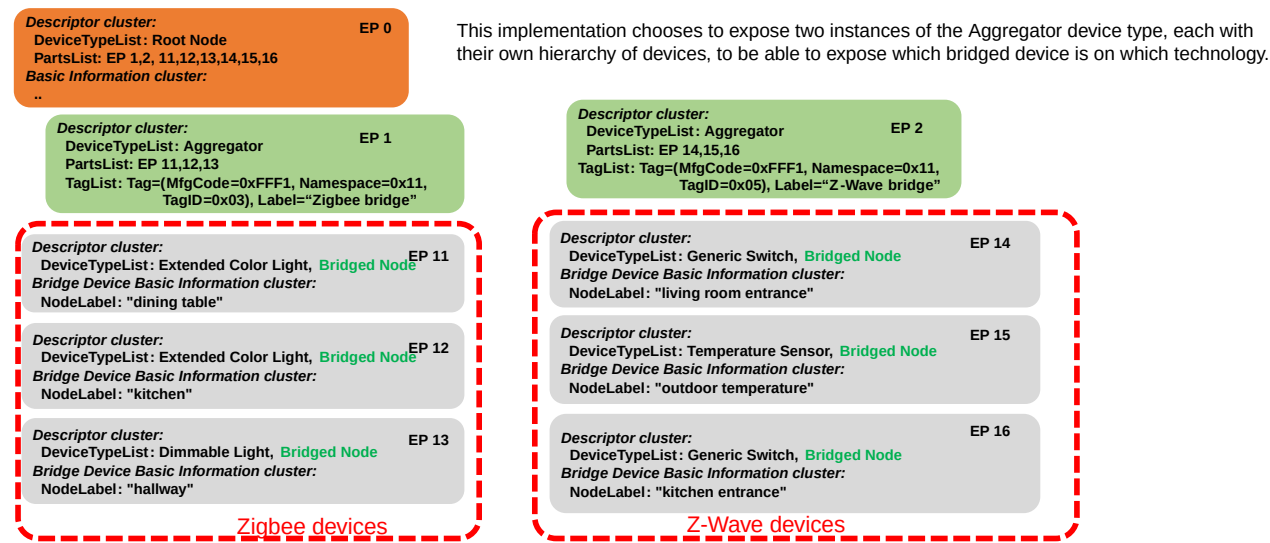


Figure 65. example of endpoints representing Bridged Devices from two technologies