

Figure 67. impression of app UI indicating information for the Bridged Devices

9.12.2.2. Native Matter functionality in Bridge

The Bridge MAY also contain native Matter functionality, i.e. non-bridged functionality, such as in the example below, which shows a smart speaker device having, in addition to a Wi-Fi connection, also a Zigbee connection towards a number of Zigbee lights. The speaker functionality (EP 31) is native Matter functionality (and could have a Controller role to allow sending Matter commands upon receiving voice commands), while the remainder of the non-zero endpoints represent the Bridged Devices.

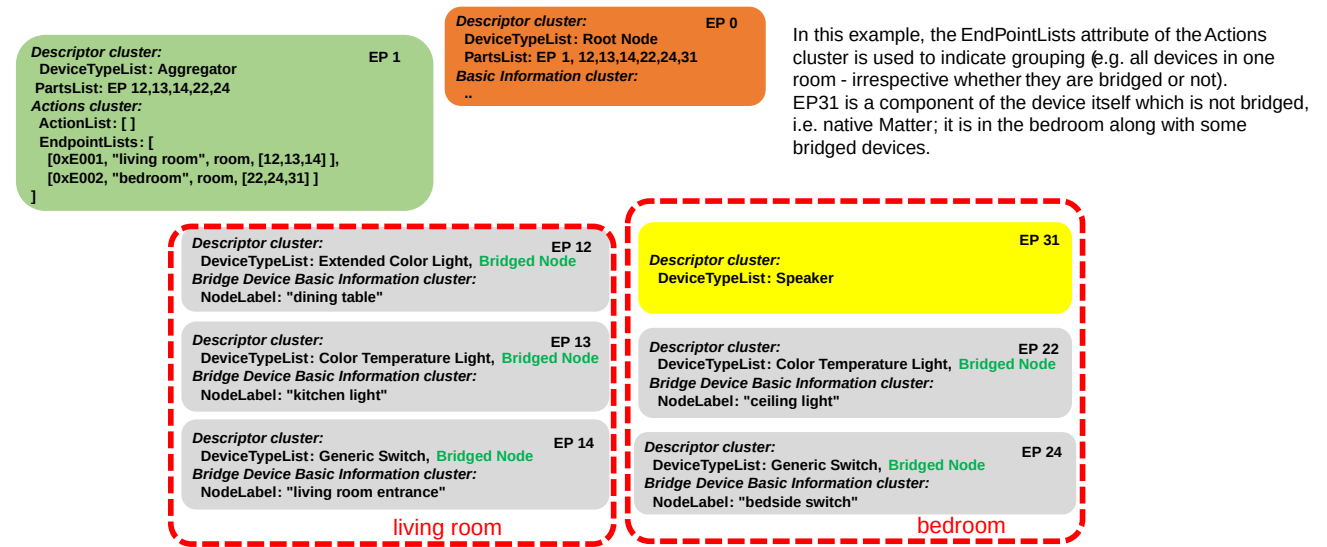


Figure 68. example of Bridge with native Matter functionality

9.12.2.3. Information about Bridged Devices

For each Bridged Device, the Bridge SHALL include a **Bridged Device Basic Information** cluster on the endpoint which represents this Bridged Device. In case a Bridged Device is represented by multiple endpoints, the Bridged Device Basic Information cluster SHALL only be present on the endpoint which is the top level of the hierarchy representing this Bridged Device (example: endpoint 24 in Figure 66, “example of endpoints representing Bridged Devices using grouping”). On this endpoint with the Bridged Device Basic Information cluster, the Bridge SHALL also include a **Descriptor** cluster with