

Similarly, the Controller creates one or more Scenes using the instances of the **Scenes Management** cluster on these endpoints.

The Controller then sends a (single) **On** command (**On/Off** cluster) to this group to switch on all these lights in a single operation. This (single) multicast message will be received (and interpreted) by the Matter lights which are part of this group as well as by the Bridge, which will forward it (after appropriate protocol conversion) to the relevant bridged lights.

Similarly, the Controller sends a (single) **Move to Level** (**Level Control** cluster) or sends a (single) **Recall Scene** (**Scenes Management** cluster) to this group, to set the brightness resp. recall a scene contents on all these lights in a single operation.

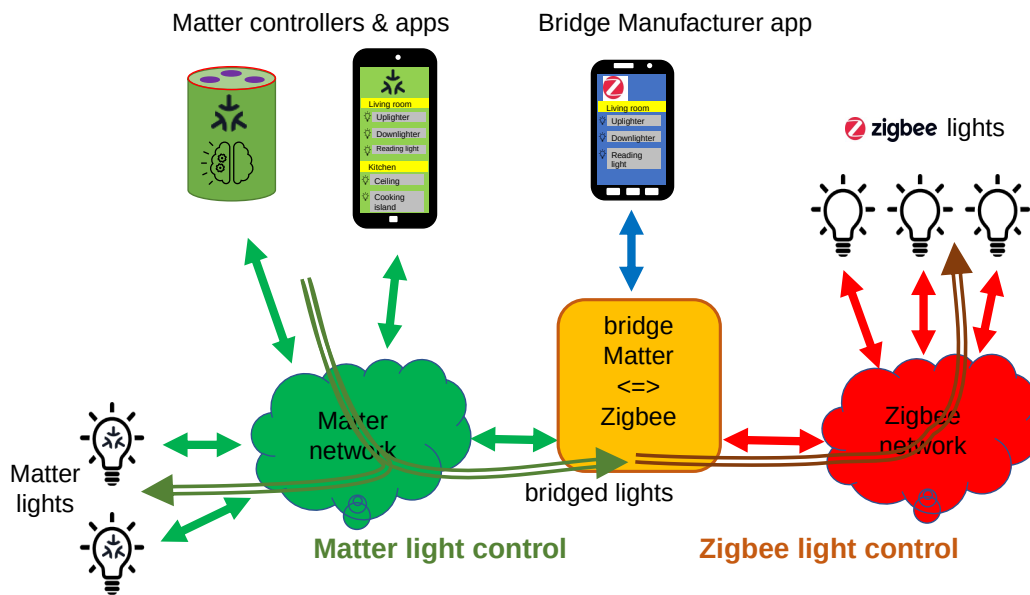


Figure 69. example of bridging lights

9.12.4.2. Receiving status/events/commands from a Bridged Device

For Bridged Devices like sensors and switches, the Bridge will receive value updates (e.g. Zigbee attribute reports), events and/or commands from those devices, and SHALL (after conversion from the native protocol of the non-Matter devices towards Matter protocol) represent those as attributes, events and/or commands in the appropriate clusters on the associated endpoints of the Bridge. Interactions with those attributes/events/commands on the Matter side (e.g., towards a Controller using the sensor/switch data) SHOULD be identical to interactions with corresponding attributes/events/commands in native Matter sensors and switches (e.g., attribute readout and subscription, proxying and eventing).

Examples:

- A temperature sensor sends a status report to the Bridge over a non-Matter interface. The logic in the Bridge processes this as an update to the **Measured Value** attribute of the **Temperature Measurement** cluster on the endpoint associated with this bridged sensor. Nodes on the Fabric which have an interest in this value can read the updated attribute value, and can configure a subscription on this attribute. This is identical to reading an attribute value or setting up an attribute subscription on a native-Matter temperature sensor Node.
- A user presses a button on a (push-button) switch device. The switch device sends a message to