

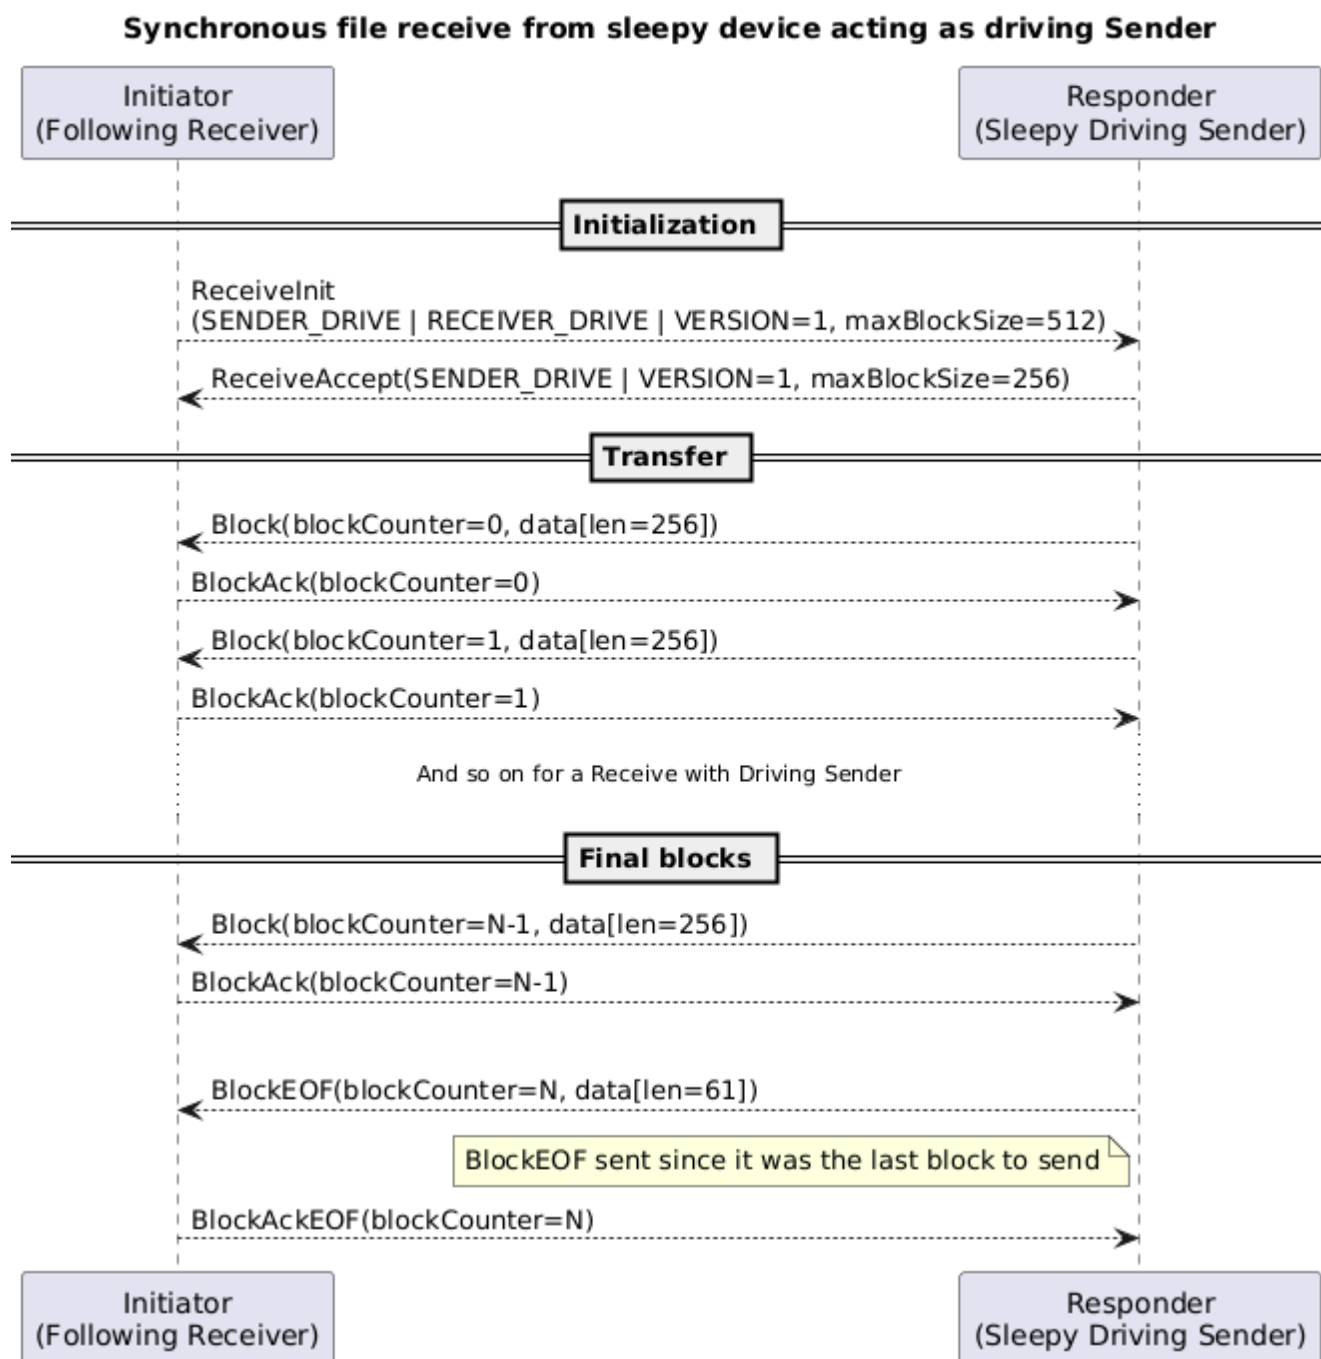


Figure 103. Synchronous file receive from sleepy device acting as driving Sender

In the [following flow](#), the Initiator wants to continue downloading (receiving) a file after the first 200 bytes were received in a previous transfer. The entire remaining contents is desired until the end of the file. Therefore, the proposed start offset (**STARTOFFS**) is set to the offset of the first byte desired in the first block transferred. The proposed length (**PLEN**) is set to 0 (or omitted) to announce desire to receive as much as is available from the Sender.

During negotiation, the length (**LEN**) field of **ReceiveAccept** is set to the known remaining file size by the Sender. This could have also been omitted in case the Sender could not or would not state the maximal amount of data to read. Observe that block numbering begins at 0 for every transfer, even if the start offset is not 0. Block indices are always 0-based for every transfer.