

A device which is being synchronized between ecosystems will be referred to as a **Synchronized Device**.

12.6.3. Fabric Synchronization Composition

Fabric Synchronization is present when an Aggregator satisfies the FabricSynchronization condition or one or more Bridged Nodes satisfy the FabricSynchronizedNode condition. (See Device Library, *Aggregator* and *Bridged Node*.)

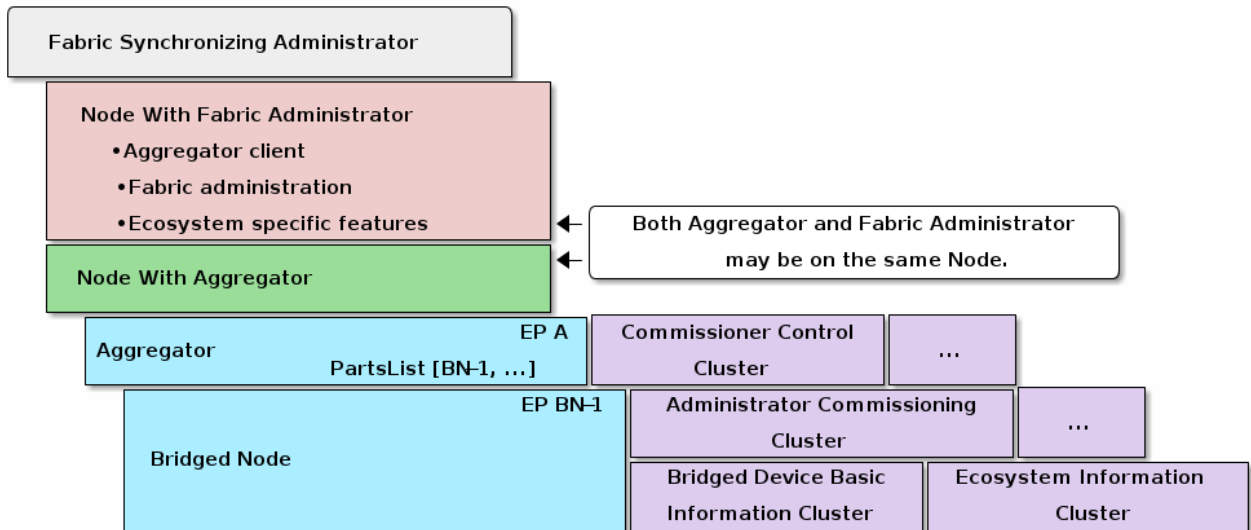


Figure 111. Composition of a device supporting Fabric Synchronization.

An Aggregator supporting Fabric Synchronization SHALL be composed of the following components.

12.6.3.1. Matter Fabric Administrator Node

The device providing the Aggregator SHALL be able to commission nodes on its fabric.

12.6.3.2. Aggregator Node

When Fabric Synchronization is supported, the Aggregator with FabricSynchronization condition (see Device Library, *Aggregator*) SHALL be met on an endpoint with the following endpoints in the Descriptor cluster PartsList.

Commissioner Control Cluster

The Commissioner Control Cluster enables another device which supports Fabric Synchronization to set up a bidirectional synchronization relationship without the user having to scan a QR code or enter a Manual Pairing Code (as used in [ECM](#) flow) for a device.

Fabric Synchronization SHALL be supported when the SupportedDeviceCategories attribute in the Commissioner Control Cluster has the FabricSynchronization bit set.