

- thus reusing the naming information which the bridge already has to allow disambiguation to the user when using a direct user interface to the bridge.

Example: the Aggregator in this figure (copied from the "Bridge for non-Matter devices" section in the Core Specification) exposes several Color Temperature Lights (endpoints 13 and 22) which are disambiguated with their NodeLabel. Note that the compound device at endpoints 24, 25 and 26 also uses a TagList (for information rather than disambiguation) since, for this case, the bridge knows the lighting direction of both elements of the compound device.

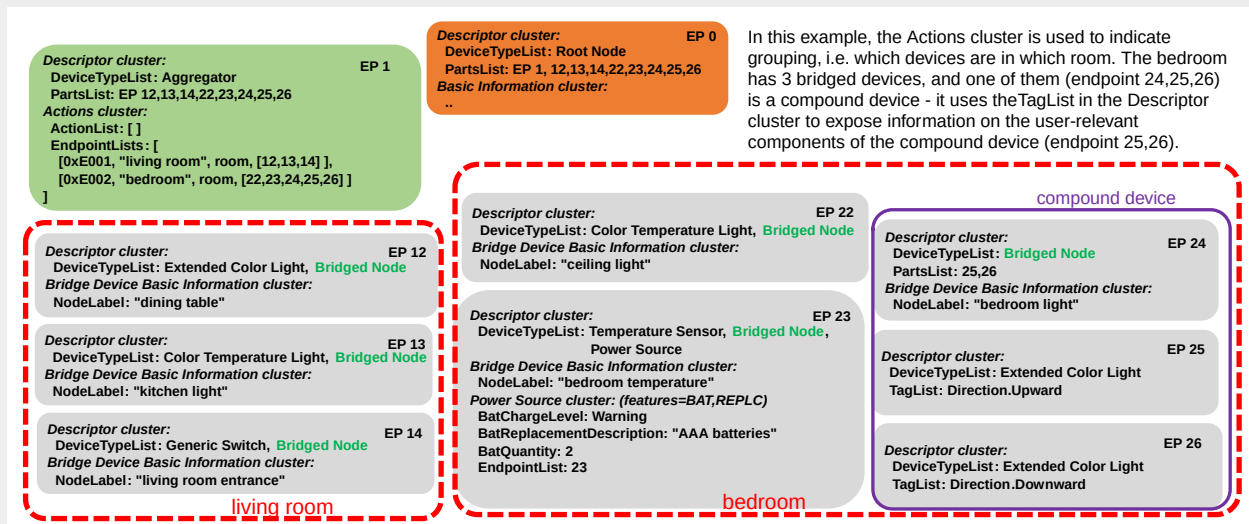


Figure 10. use of NodeLabel and TagList for disambiguation