

Figure 118: Receive sequence

The following figure shows a receive sequence where no delay is introduced. RADIO is configured to use shortcuts between **READY** and **START**, and between **PHYEND** and **DISABLE**.

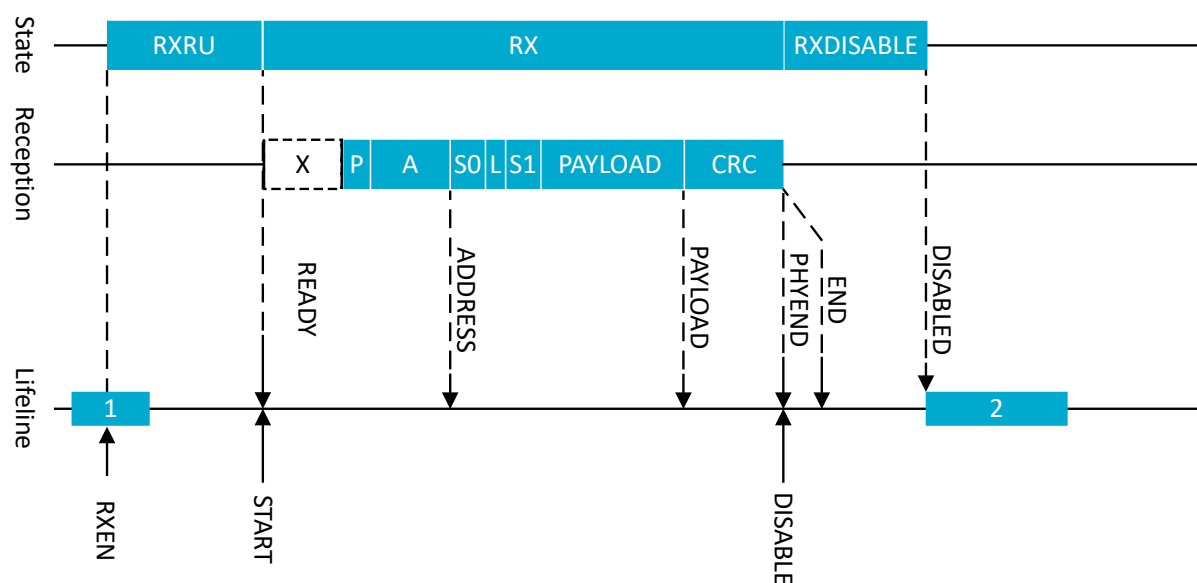


Figure 119: Receive sequence using shortcuts to avoid delays

RADIO can receive consecutive packets without having to disable and re-enable RADIO between packets, as illustrated in the following figure.