

Commercial Multi-engine Course Version 9 Stage 2 Guide for Instructors

Introduction and Resources

This stage focuses on trainees developing instruments flying skills both single pilot and in a crew environment. Trainees are introduced to multi-crew concepts (MCC) and given the opportunity to act as both pilot flying (PF) and pilot monitoring (PM).

In preparation for this stage, trainees should purchase a cockpit poster and be provided with the published checklist flows and instrument profiles. Posters for all aircraft types and cockpit configurations are available at customer service for approximately \$23. The Archer is the primary aircraft for this stage but trainees may opt for another aircraft if desired.

Flight Lessons

All of the flight lessons in this stage are instrument cross-countries. There are seven dual IFR XC flights and nine solo/pic IFR XC flights. The solo/pic flights can be completed either solo or with another trainee in the same stage of the course. At this time trainees are not assigned another trainee to partner with for the flights.

During the seven dual XC flights, the trainee should be practicing the published flows and profiles with their instructor. The instructor and trainee can practice PF and PM roles as well but must keep in mind that the trainee will be conducting IFR XC flights solo.

Simulator Lessons

There are six simulator lessons in this stage for practicing multi crew concepts. The lessons are intended to be done with two trainees in the course. It may be difficult to coordinate schedules for all six simulator lessons so if another trainee is not available, the instructor may sit in as PM. It is strongly recommended that at least the last two simulator lessons prior to the stage check be done with another trainee.

The stage check is also done in the simulator and will be with two trainees. The check instructor will be evaluating the trainees' instrument skills as well as their ability to work in a crew environment. Flows will not be evaluated in the simulator because of the different cockpit configuration but the trainee may be asked to demonstrate their knowledge on a cockpit poster.

Scenario-Based Training Lesson Plan

Lesson 402

TRAINING OBJECTIVE

Plan and execute an IFR flight to a towered airport.

SCENARIO

Working for the local FBO, your boss has requested you and another pilot fly an aircraft he is trying to sell to KTIK for a possible buyer. The buyer is only in town for one day. In addition to the crew, you will also be carrying some heavy equipment that will be sold with the aircraft. You will only have 25 gallons of fuel on board.

- Materials the trainee(s) will need:
 - Low enroute chart
 - Approach plates
 - Appropriate checklists

COMPLETION STANDARD

This lesson is complete when the pilot meets or exceeds the Instrument Rating Practical Test Standards for the applicable outlined tasks, demonstrates an understanding of the procedures related to Multi crew concepts, and is able to demonstrate proficiency with the FITA published aircraft flows and profiles with minimal instructor guidance.

POSSIBLE HAZARDS OR CONSIDERATIONS

- Abnormal/Emergency procedures
- Loss of communications
- Visibility/ceilings
- Winds conditions
- Ground-based obstructions/hazards

MITIGATION STRATEGIES AND RESOURCES

Abnormal/Emergency procedures

The instructor and the trainee(s) will discuss procedures related to abnormal and emergency situations; situations that require checklist usage and situations that require decision making and critical thinking skills.

Loss of communications

The instructor and the trainee(s) will review the procedures related to loss of communications and how that will affect decision making during the flight. This is a good opportunity to discuss what constitutes emergency situations and how to communicate with suspected loss of communications.

FTD SET UP:

1. Select lesson 402 from menu. The scenario will load with aircraft positioned on runway 9R at KMLB, with the weather already loaded. The crew will need to configure avionics as desired for flight.
2. Set fuel to 25 gallons total
3. Fail glide slope for GPS approach, remember to cancel the failure prior to the ILS approach
4. Origin/Destination: KMLB ☐ KTIIX
5. Weather: 03015 OVC 004
MLB ATIS: 03015 OVC 004 A2992
TIX ATIS: 03015 OVC 007 A2992
6. Profile: Direct KTIIX- GPS 36 (Circle) to the published missed and hold- ILS 36 to full stop.

A. Key Lesson Points

- Flows and profiles
- PF/PM roles
- Introduce an abnormality that is solvable through proper checklist usage
- Simulate an communication failure
- Limited fuel condition (weight and balance planning)

B. ATC Simulation/Instructor Roles

The instructor should use the scenario to act as ATC, but has the ability to edit as necessary to keep the scenario as realistic as possible. Instruction should only be given prior to the AATD and during the post AATD briefing.

C. Postflight Review

The discussion should begin with trainee(s) self-critique and instructor led discussion. The purpose is for the trainee(s) to draw their own conclusions and solve problems.

D. Scenario:

- Preflight/taxi

Scenario begins on the ground in KMLB lined up on RWY 9R.

Ground: Cleared to KTIIX as filed, climb maintain 1500 expect 3000 10 minutes after departure, departure frequency 126.025, squawk 3276

- Takeoff Climb

Tower: FIT 01, fly runway heading, climb maintain 2000, runway 9R cleared for takeoff

Climbing through 800 ft

Tower: contact departure

Departure: Turn left heading 300, climb maintain 3000

- Cruise

When level at 3000 and enroute to KTIIX (pitot heat failure)

- Select circuit breaker option, not pitot failure

Departure: FIT 01, Contact approach 134.95

Approach: FIT 01, Cleared direct to AWINY

Approach: FIT 01, 5 miles from AWINY, maintain 3000 until established on the approach, cleared for the RNAV GPS RWY 36 approach.

- Approach

Prior to arriving at FAF

Approach: FIT 01, Contact tower 118.9

Tower: FIT 01, for traffic circle west to RWY 9, RWY 9 cleared to land

- Missed

Tower: Contact Departure 134.95

Once crossing the holding fix (KYTEE)

Departure: Execute published missed procedure, expect further clearance in 15mins and you can expect ILS 36

Communication failure

From this point forward, do not communicate with trainee(s)

- Landing/Taxi-in

Lesson complete upon landing at KTIIX

Scenario-Based Training Lesson Plan

Lesson 403

TRAINING OBJECTIVE

Plan and execute an IFR flight to a non-towered airport.

SCENARIO

Working for a hunting outfitter, you will be flying a hunter and his gear to camp. The weather is forecasted to be IMC for most of the flight. Use an online resource (skyvector, fore flight, etc.) to plan an IFR cross-country from Sioux Falls, SD (KFSD) to Aberdeen, SD (KABR).

- Materials the trainee(s) will need:
 - Low enroute chart
 - Approach plates for KABR
 - Appropriate checklists

COMPLETION STANDARD

This lesson is complete when the pilot meets or exceeds the Instrument Rating Practical Test Standards for the applicable outlined tasks, demonstrates an understanding of the procedures related to Multi crew concepts, and is able to demonstrate proficiency with the FITA published aircraft flows and profiles with minimal instructor guidance.

POSSIBLE HAZARDS OR CONSIDERATIONS

- Abnormal/Emergency procedures
- Loss of communications
- Visibility/ceilings
- Winds conditions
- Ground-based obstructions/hazards

MITIGATION STRATEGIES AND RESOURCES

Abnormal/Emergency procedures

The instructor and the trainee(s) will discuss procedures related to abnormal and emergency situations; situations that require checklist usage and situations that require decision making and critical thinking skills.

FTD SET UP:

7. Select lesson 407 from menu. The scenario will load with aircraft positioned on runway 33 at KFSD, with the weather already loaded. The crew will need to configure avionics as desired for flight.
8. Set fuel to 30 gallons total
9. Origin/Destination: KFSD ☐ KABR
10. Weather: 170 08 OVC 035
FSD ATIS: 17008 OVC 035 A2992
ABR ATIS: 18008 OVC 040 A2992
11. Profile: Direct FSD to join V15 to ABR and shoot the visual approach to RWY 17

E. Key Lesson Points

- Flows and profiles
- PF/PM roles
- Introduce an abnormality that cannot be corrected
- Visual Descent Planning (VDP)
- Limited fuel condition (weight and balance planning)

F. ATC Simulation/Instructor Roles

The instructor should use the scenario to act as ATC, but has the ability to edit as necessary to keep the scenario as realistic as possible. Instruction should only be given prior to the AATD and during the post AATD briefing.

G. Postflight Review

The discussion should begin with trainee(s) self-critique and instructor led discussion. The purpose is for the trainee(s) to draw their own conclusions and solve problems.

H. Scenario:

- Preflight/taxi

Scenario begins on the ground in KFSD lined up on RWY 33.

Ground: Cleared direct FSD, then join the V15 to ABR, climb maintain 3000 expect 8000 10 minutes after departure, departure frequency 125.8, squawk 3276
(KFSD-FSD-HON-ABR-KABR)

- Takeoff Climb

Tower (118.3): FIT 01, fly runway heading, climb maintain 3000, runway 33 cleared for takeoff

Climbing through 1800 ft

Tower (118.3): contact departure

Departure (125.8): Proceed direct the Sioux Falls (FSD) VOR, climb maintain 8000

Climbing through 3500 ft

Departure (125.8): Contact Minneapolis Center 126.5

- Cruise

When level at 8000

Center (126.5): FIT 01, Report crossing the Huron (HON) VOR

Approximately 60 NM from HON fail engine gauges (EAU). Do this by pressing the second bezel key from the left, and then press the fail key, then EAU key.

Approximately 40 NM from HON fail the ADC. Do this by pressing the second bezel key from the left, and then press the fail key, then ADC key.

Approximately 20 NM from HON fail the AHRS. Do this by pressing the second bezel key from the left, and then press the fail key, then AHRS key.

When crossing HON

Center (126.5): FIT 01, cross TULLA intersection at 4000 ft

When crossing TULLA

Center (126.5): FIT 01, contact Minneapolis center on 120.6

Approximately 20 NM from ABR

Center (120.6): FIT 01, descend and maintain 3000

Center (120.6): FIT 01, report airport in sight

When airport in sight

Center (120.6): FIT 01, would you like to cancel IFR at this time?

- Yes

Center (120.6): FIT 01, IFR flight plan is cancelled, squawk VFR, frequency change approved.

- No (Vector student for visual approach RWY 17)

Center (120.6): FIT 01, report runway in sight.

When RWY in sight

Center (120.6): Cleared for the RWY 17 visual approach, frequency change approved.

- Landing/Taxi-in

Lesson complete upon landing at KABR

Lesson 413

TRAINING OBJECTIVE

Plan and execute an IFR flight to a towered airport.

SCENARIO

Working for the local FBO, you will be flying a congressman and her luggage to an important meeting. The weather is forecasted to be IMC for most of the flight. Use an online resource (skyvector, fore flight, etc.) to plan an IFR cross-country from Lynchburg, VA (KLYH) to Roanoke, VA (KROA).

- Materials the trainee(s) will need:
 - Low enroute chart
 - Approach plates for KROA
 - Appropriate checklists
 - IPAD/tablet if available

COMPLETION STANDARD

This lesson is complete when the pilot meets or exceeds the Instrument Rating Practical Test Standards for the applicable outlined tasks, demonstrates an understanding of the procedures related to Multi crew concepts, and is able to demonstrate proficiency with the FITA published aircraft flows and profiles with minimal instructor guidance.

POSSIBLE HAZARDS OR CONSIDERATIONS

- Abnormal/Emergency procedures
- Loss of communications
- Visibility/ceilings
- Winds conditions
- Ground-based obstructions/hazards

MITIGATION STRATEGIES AND RESOURCES

Abnormal/Emergency procedures

The instructor and the trainee(s) will discuss procedures related to abnormal and emergency situations; situations that require checklist usage and situations that require decision making and critical thinking skills.

FTD SET UP:

12. Select lesson 415 from menu. The scenario will load with aircraft positioned on runway 22 at KROA, with the weather already loaded. The crew will need to configure avionics as desired for flight.

13. Set fuel to 25 gallons total

14. Origin/Destination: KLYH ☐ KROA

15. Weather:

LYH ATIS:

ROA ATIS:

16. Profile: Direct LYH to join V470 to TABER then direct DIXXY, then execute the LDA RWY 6 approach into KROA.

I. Key Lesson Points

- Flows and profiles
- PF/PM roles
- Introduce an abnormality that cannot be corrected
- Visual Descent Planning (VDP)
- Limited fuel condition (weight and balance planning)

J. ATC Simulation/Instructor Roles

The instructor should use the scenario to act as ATC, but has the ability to edit as necessary to keep the scenario as realistic as possible. Instruction should only be given prior to the AATD and during the post AATD briefing.

K. Postflight Review

The discussion should begin with trainee(s) self-critique and instructor led discussion. The purpose is for the trainee(s) to draw their own conclusions and solve problems.

L. Scenario:

- Preflight/taxi

Scenario begins on the ground in KLYH lined up on RWY 22.

Ground: Cleared to Roanoke via radar vectors to the Lynchburg VOR, then join the V470 to TABER intersection, then direct to the DIXXY intersection, and radar vectors to Roanoke, climb maintain 3000 expect 8000 10 minutes after departure, departure frequency 135.0, squawk 3726
(KLYH-LYH-MONAT-TABER-DIXXY-KROA)

- Takeoff Climb

Tower (127.65): FIT 01, proceed direct to the Lynchburg VOR, climb maintain 3000, runway 22 cleared for takeoff

Climbing through 1800 ft

Tower (127.65): FIT 01, contact departure

Departure (135.0): climb maintain 8000

Departure (135.0): FIT 01, report crossing MONAT

- Cruise

When crossing MONAT

Departure (135.0): FIT 01, Contact Roanoke Approach 126.9

When crossing DEWIT (10NM to TABER)

Approach (126.9): FIT 01, Descend at pilot's discretion to cross TABER at 6000

During descent to TABER

Approach (126.9): FIT 01, due to traffic I'm going to need you to hold at TABER, standard turns, minute and a half legs, and expect further clearance at __:__ (Read from G1000, add 16 mins to current time). Winds at the airport are 080 @ 10, expect LDA RWY 6 approach.

Radio communication failure

- Landing/Taxi-in

Lesson complete upon landing at KABR

Scenario-Based Training Lesson Plan

Lesson 419

TRAINING OBJECTIVE

Plan and execute an IFR flight to a towered airport.

SCENARIO

Working for the local FBO, you will be taking a couple of tourist on a sightseeing flight to Honolulu. The weather is forecasted to be a bit cloudy for most of the flight but you should be able to get above it to see the mountains. Use an online resource (skyvector, fore flight, etc.) to plan an IFR cross-country from Maui, HI (PHOG) to Honolulu, HI (PHNL).

- Materials the trainee(s) will need:
 - Low enroute chart
 - Approach plates for PHNL
 - Appropriate checklists
 - IPAD/tablet if available

COMPLETION STANDARD

This lesson is complete when the pilot meets or exceeds the Instrument Rating Practical Test Standards for the applicable outlined tasks, demonstrates an understanding of the procedures related to Multi crew concepts, and is able to demonstrate proficiency with the FITA published aircraft flows and profiles with minimal instructor guidance.

POSSIBLE HAZARDS OR CONSIDERATIONS

- Abnormal/Emergency procedures
- Loss of communications
- Visibility/ceilings
- Winds conditions
- Mixture control
- Ground-based obstructions/hazards

MITIGATION STRATEGIES AND RESOURCES

Abnormal/Emergency procedures

The instructor and the trainee(s) will discuss procedures related to abnormal and emergency situations; situations that require checklist usage and situations that require decision making and critical thinking skills.

FTD SET UP:

17. Select lesson 423 from menu. The scenario will load with aircraft positioned on runway 5 at PHOG, with the weather already loaded. The crew will need to configure avionics as desired for flight.

18. Set fuel to 25 gallons total

19. Origin/Destination: PHOG ☐ PHNL

20. Weather:

HOG ATIS: 08010 OVC 1000

HNL ATIS: 09008 OVC 800

21. Profile: Beach Three Departure to LNY to join the V16 to ALANA, then execute VOR/DME B approach into PHNL.

M. Key Lesson Points

- Flows and profiles
- PF/PM roles
- Introduce an abnormality that cannot be corrected (GPS loss)
- Visual Descent Planning (VDP)
- Limited fuel condition (weight and balance planning)

N. ATC Simulation/Instructor Roles

The instructor should use the scenario to act as ATC, but has the ability to edit as necessary to keep the scenario as realistic as possible. Instruction should only be given prior to the AATD and during the post AATD briefing.

O. Postflight Review

The discussion should begin with trainee(s) self-critique and instructor led discussion. The purpose is for the trainee(s) to draw their own conclusions and solve problems.

P. Scenario:

- Preflight/taxi

Scenario begins on the ground in PHOG lined up on RWY 5.

*Ground (121.9): Cleared to Honolulu via the Beach Three
Departure to the Linai (LNY) VOR and the V16 to ALANA,
Departure frequency 119.5, squawk 2432*

- Takeoff Climb

Tower (118.7): FIT 01, runway 5 cleared for takeoff

Climbing through 800 ft

Tower (118.7): FIT 01, contact Honolulu departure

Departure (119.5): climb maintain 8100

Climbing through 7000 fail GPS, to do this, press second bezel key from left, then press FAIL, then MORE, then GPS on the MFD. This will fail the GPS so there will be no moving map but they will still have DME.

- Cruise

LNY is a compulsory reporting point.

If the crew reports LNY:

Departure (119.5): FIT 01, contact approach 118.3

*Approach (118.3): FIT 01, Descend at pilots discretion to cross
SAKKI intersection at 4000, you can expect the VOR/DME B.*

If the crew misses the compulsory reporting point, act annoyed:

Departure (119.5): FIT 01, Departure...

*Departure (119.5): FIT 01, I see you've crossed the LINAI VOR
which is a compulsory reporting point without reporting it. We'd
appreciate it if you'd help us out a bit. Contact approach 118.3.*

*Approach (118.3): FIT 01, Descend at pilots discretion to cross
SAKKI intersection at 4000, you can expect the VOR/DME B.*

- Descent

After crossing SAKKI

Approach (118.3): FIT 01, Descend maintain 3000

3 minutes from ALANA

Approach (118.3): FIT 01, due to traffic hold at ALANA as published, EFC at __:__ (Look at time on Garmin and add 8mins)

When approaching EFC time

Approach (118.3): FIT 01, Maintain 3000, cleared for the VOR/DME B approach

When on the final approach course

Approach (118.3): FIT 01, contact tower 118.1

Tower (118.1): FIT 01, cleared to land RWY 4R

- Landing/Taxi-in

Lesson complete upon landing at PHNL

Lesson 420

TRAINING OBJECTIVE

Plan and execute an IFR flight to a towered airport.

SCENARIO

Working for a commercial ranch, you will be hauling several hundred pounds of feed to El Paso, TX. The weather is forecasted to be IMC for most of the. Use an online resource (skyvector, fore flight, etc.) to plan an IFR cross-country from Grant County Airport in New Mexico (KSVC) to El Paso, TX (KELP).

- Materials the trainee(s) will need:
 - Low enroute chart
 - Approach plates for KELP
 - Appropriate checklists
 - IPAD/tablet if available

COMPLETION STANDARD

This lesson is complete when the pilot meets or exceeds the Instrument Rating Practical Test Standards for the applicable outlined tasks, demonstrates an understanding of the procedures related to Multi crew concepts, and is able to demonstrate proficiency with the FITA published aircraft flows and profiles with minimal instructor guidance.

POSSIBLE HAZARDS OR CONSIDERATIONS

- Abnormal/Emergency procedures
- Visibility/ceilings
- Wind conditions
- VOR/GPS navigation
- Descent Planning
- Ground-based obstructions/hazards

MITIGATION STRATEGIES AND RESOURCES

Abnormal/Emergency procedures

The instructor and the trainee(s) will discuss procedures related to abnormal and emergency situations; situations that require checklist usage and situations that require decision making and critical thinking skills.

FTD SET UP:

22. Select lesson 424 from menu. The scenario will load with aircraft positioned on runway 26 at KSVC, with the weather already loaded. The crew will need to configure avionics as desired for flight.

23. Set fuel to 25 gallons total

24. Origin/Destination: KSVC ☐ KELP

25. Weather:

SVC ATIS: 27015 VIS $\frac{1}{4}$

ELP ATIS: 24015 OVC 046

26. Profile: Direct FFAST intersection to join V94 to WATEX, then execute the VOR RWY 26L approach into KELP.

Q. Key Lesson Points

- Flows and profiles
- PF/PM roles
- Introduce an abnormality that cannot be corrected (Vacuum failure)
- Visual Descent Planning (VDP)
- Limited fuel condition (weight and balance planning)

R. ATC Simulation/Instructor Roles

The instructor should use the scenario to act as ATC, but has the ability to edit as necessary to keep the scenario as realistic as possible. Instruction should only be given prior to the AATD and during the post AATD briefing.

S. Postflight Review

The discussion should begin with trainee(s) self-critique and instructor led discussion. The purpose is for the trainee(s) to draw their own conclusions and solve problems.

T. Scenario:

- Preflight/taxi

Scenario begins on the ground in KSVC lined up on RWY 26. The crew will have to contact Albuquerque Radio for clearance (122.1R 110.8T).

*FSS: Cleared to El Paso as filed, climb maintain 7000 expect 9000 10 minutes after departure, departure frequency 134.45, squawk 3443, clearance void time __:__ (add 5 minutes to time on G1000), and contact departure once departing the airport
**The crew should make CTAF calls on 122.8 before and after departure until clear of the pattern.*

- Takeoff Climb

Departure (134.45): FIT 01, radar contact, climb maintain 9000, intercept and track outbound on the 169 radial from the Silver City VOR to the FAAST intersection.

**Crew may use autopilot if desired*

- Cruise

When level at 9000

Departure (134.45): FIT 01, upon crossing the FAAST intersection join the V94 to WATEX.

After crossing FAAST intersection, fail the vacuum system from the instructor station (this will fail the autopilot).

Crossing the Deming VOR (DMN)

Departure (134.45): FIT 01, due to weather at El Paso, hold at the CRATT intersection as published EFC __:__ (add 30 minutes to time from G1000)

At the EFC time

Departure (134.45): FIT 01, resume navigation to WATEX and contact approach on 124.25.

Approach (124.25): FIT 01, expect VOR RWY 26L approach.

Fail GPS crossing MOLLY

Crossing WIKKR

Approach (124.25): FIT 01 descend maintain 7000.

Approach (124.25): FIT 01, 5 miles from WATEX, maintain 7000 until established, cleared for the VOR 26L approach

After crossing WATEX

Approach (124.25): FIT 01, contact tower

Tower (118.3): Cleared to land 26L

- Landing/Taxi-in

Lesson complete upon landing at KABR

Profiles

F.I.T. Aviation Commercial Profiles PA-28-181			
Departure		Briefings	Arrival
PF = Pilot Flying		PM = Pilot Monitoring	
NOTE: The PF will give the following briefing to the PM: Assignments: "I will be conducting the takeoff, you are monitoring the flight instruments, engine instruments and the radio." Runway: - Runway in use, runway dimensions, wind components. - Rotation speed and climb speed(s). Issue on takeoff / climb: "If there is an issue on the takeoff roll, you call "ABORT" and I will discontinue the takeoff." "If there is an issue in the climb, you identify the problem, run the checklist and notify ATC. I will continue to fly and enter the traffic pattern as necessary." Complete Engine Failure: - Brief Intentions for: Takeoff Roll, After Lift-off rwy remaining, After Lift-off no-rwy remaining (Low Alt), With sufficient altitude to return to airport. - PF will brief: "I will call 'Engine Failure' and execute the plan. You run the 'Power-off Landing Check' and notify ATC if able." IFR Departure: - Brief DP / SID / Radar Vector procedure - PF confirms: "HDG (if known), ALT and Dep Frequency set."		NOTE: The PF will conduct the following briefing. They shall utilize the autopilot or the PM to control the aircraft while the briefing is made. PM remains in charge of monitoring and communicating with ATC. 1- Runway Expected 2- Runway Dimensions 3- TDZE 4- ATIS 5- Altimeter / STBY Altimeter 6- Runway Conditions 7- Runway Exit Plan (L or R, Alternate Taxiways) 8- Approach Brief - If VFR, brief expected arrival leg (DW, Base, Straight-In) - If IFR, brief: - Plate Title - Date of Expiration - Comm Freqs - Nav Freqs - MSA - Route to IAP (Vector, IAF) - Final App Course - Altitudes - DA / MDA - MAP - MA Instructions 9- Wind Components (and effect on IMC runway sighting) 10- Go-Around Procedure	

F.I.T. Aviation Commercial Profiles PA-28-181



IFR Normal Takeoff

Complete all checklist up to "Runway Entry" and conduct a briefing.

PF = Pilot Flying PM = Pilot Monitoring

1. PF calls for "Runway Entry Check". PM does and verifies the check.

2. When cleared for takeoff, PF taxi onto centerline and call for "Lineup Check".

4. 1000' AGL, PF calls "Climb Check". PM does and verifies the check.

3.

2. PF applies full power, PM completes the "Lineup Check" calling:
"HSI/Runway HDG check, RPM full static, Engine Gauges check, Airspeed alive".

3. PM calls for rotations by saying, " knots, Rotate". (insert calculated TO speed)

After liftoff, PM verifies a positive rate of climb and monitors the engine instruments.

2.

F.I.T. Aviation Commercial Profiles PA-28-181



Non-Precision Approach

PF = Pilot Flying PM = Pilot Monitoring

Complete Descent and Arrival checks,
confirm the correct approach plate
and conduct a briefing.

1. Prior to intercepting the FAC,
PF calls for "Flaps 10°".
A/S 90kts.

2. When cleared for the IAP,
track the FAC inbound.

6. PM Callout: "500' Above MDA".

7. PM Callout: "100' Above MDA".

3. PF calls "Final Approach Fix, Final Check".
PM does and verifies check.

4. PF initiates a descent at an appropriate
rate for the approach.

5. PM Callout: "1000' Above MDA".

8. PM Callout: "At MDA".
-PM calls "Visual", PF calls
"Continue" and continues the
approach.

-No Visual: continue to MAP.

-At Map: PM calls "At MAP"
PF calls "Going Missed" and
executes missed procedure.

F.I.T. Aviation Commercial Profiles PA-28-181



Precision Approach

PF = Pilot Flying PM = Pilot Monitoring

Complete Descent and Arrival checks, confirm the correct approach plate and conduct a briefing.

1. Prior to intercepting the LOC, PF calls for "Flaps 10°". A/S 90kts.

2. When cleared for the IAP, track the LOC inbound.

6. PM Callout: "500' Above DA".

7. PM Callout: "100' Above DA".

3. PF calls "Glideslope Intercept, Final Check" PM does and verifies check.


4. PF Track the Glideslope and LOC to DA.



5. PM Callout: "1000' Above DA".


8. PM Callout: "At DA".
-If PM calls "Visual", PF calls "Continue" and continues the approach.
-If PM calls "No Visual", PF calls "Going Missed" and executes missed approach




Flows

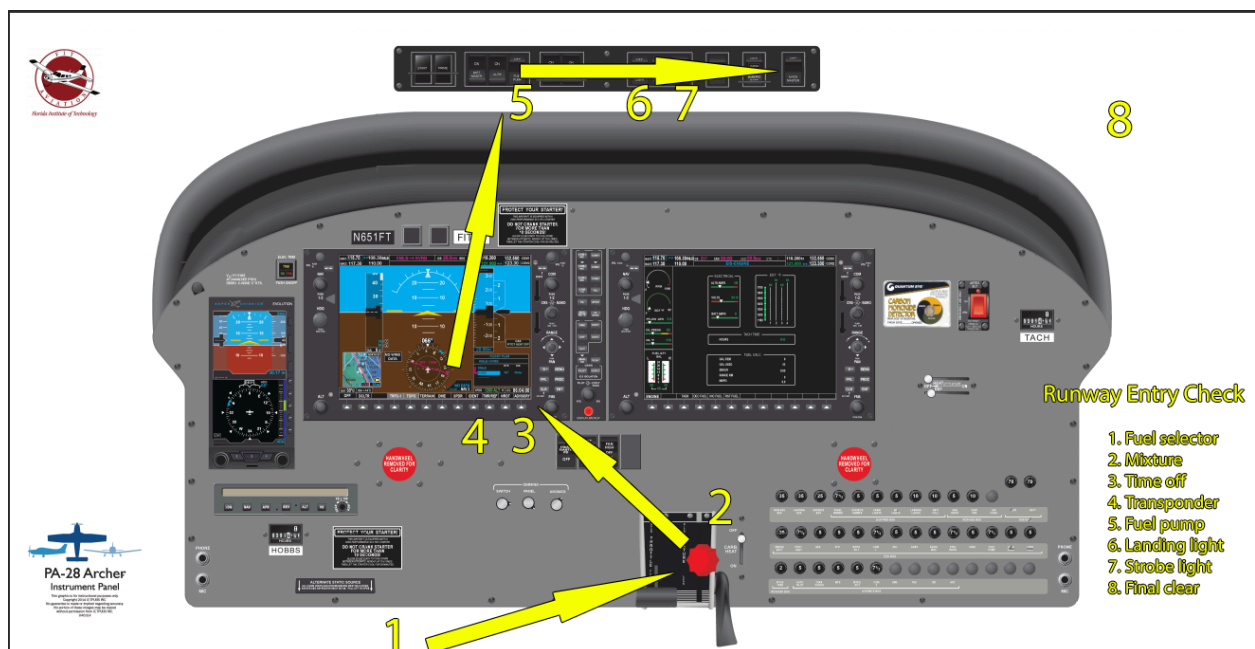

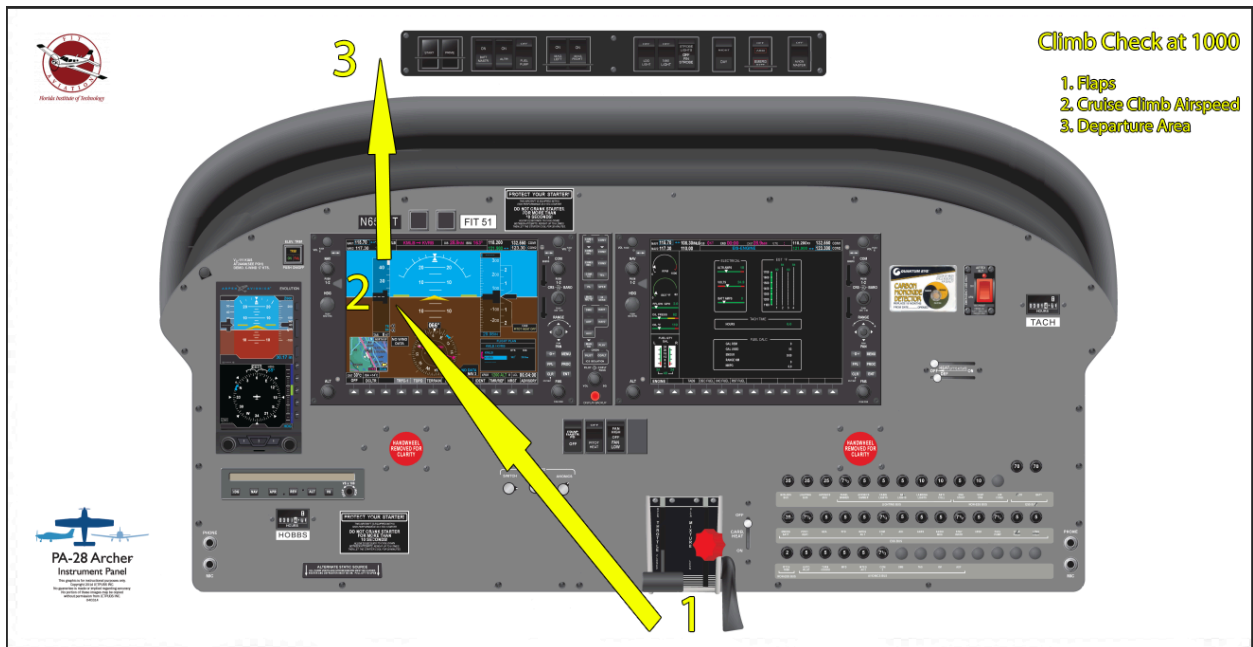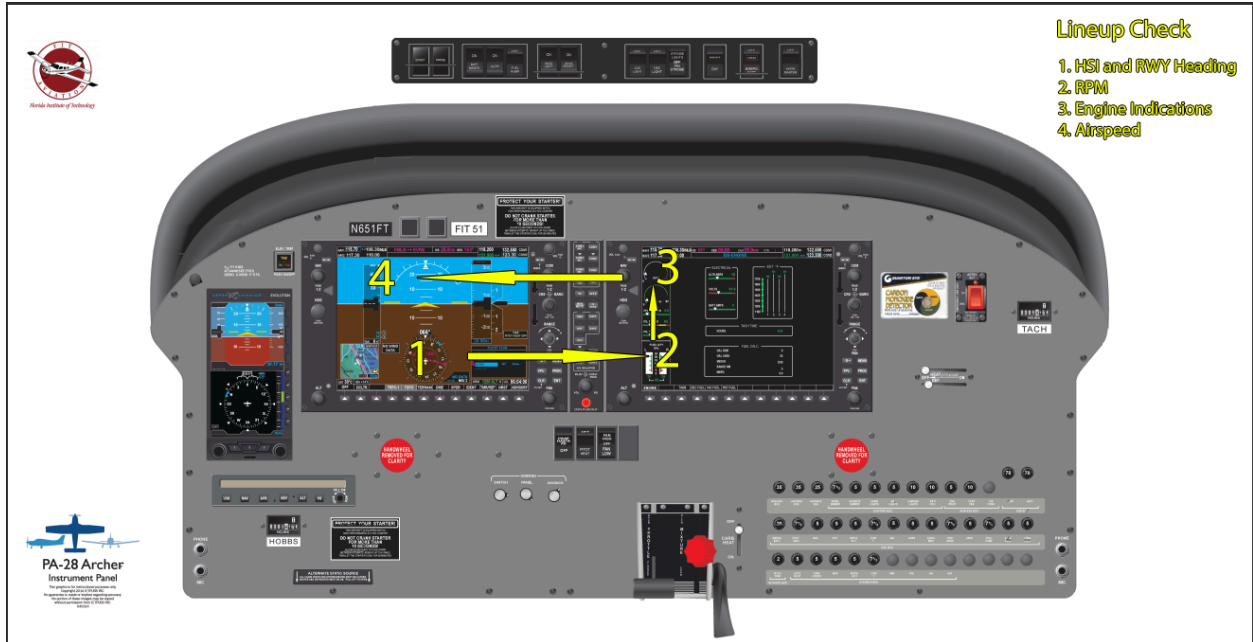

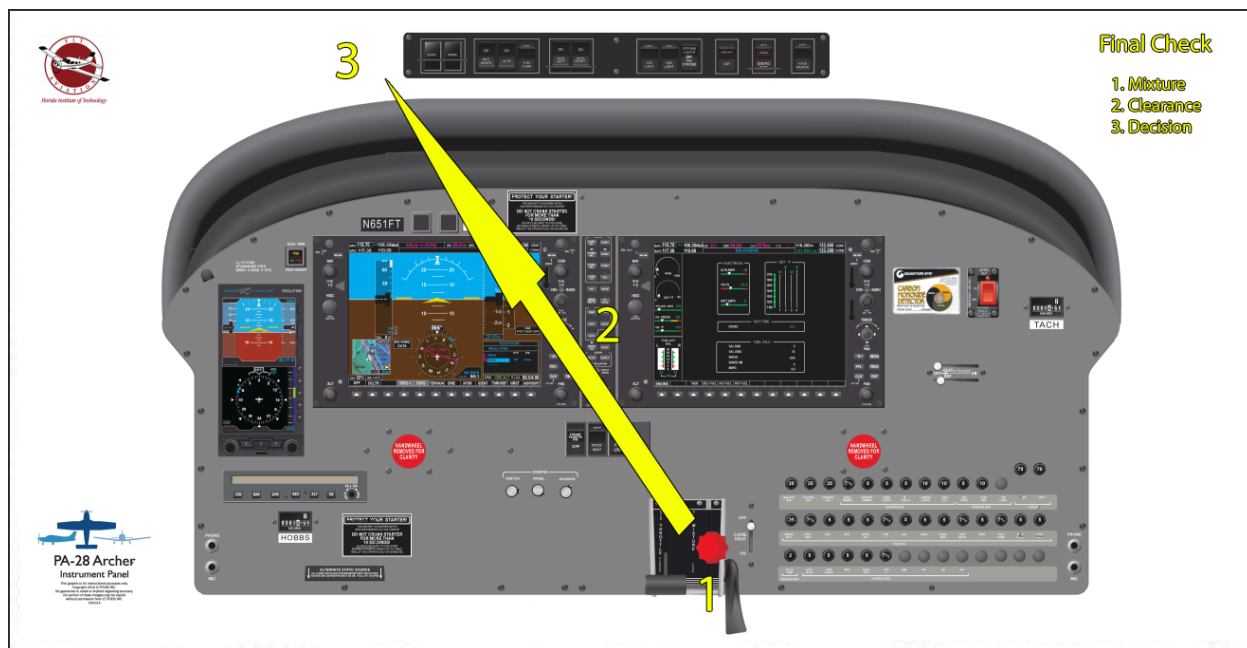

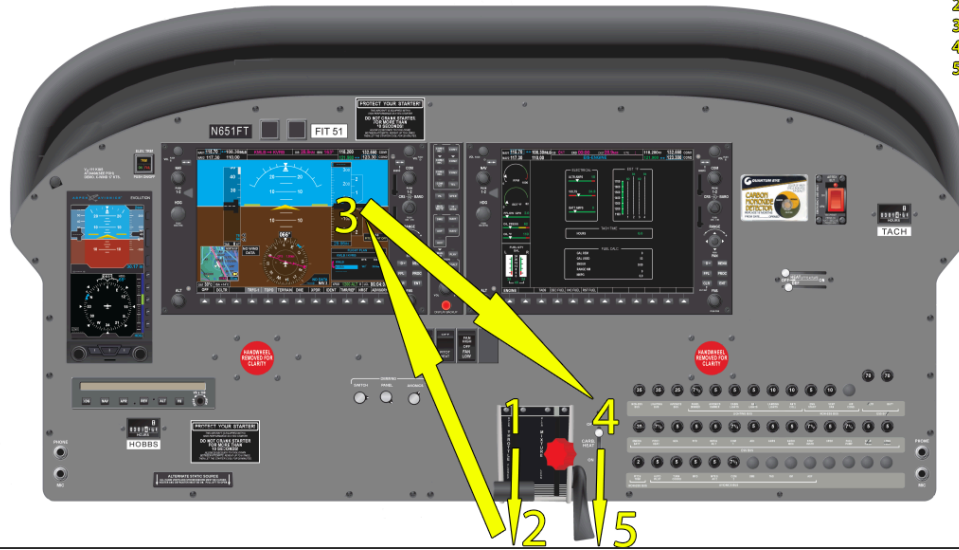

Go Around

1. Throttle
2. Flaps
3. Climb
4. Carburetor Heat
5. Remaining Flaps