

EVIQO™

ELECTRIC VEHICLE IQ ORGANIZATION




EVIPOWER™

YOUR HOME SUPERPOWER

GEN2 NACS


DATA SHEET

SMART

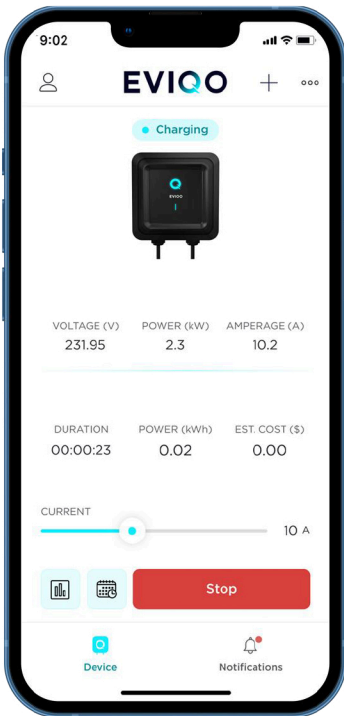


TRACK

power, time and cost in real time

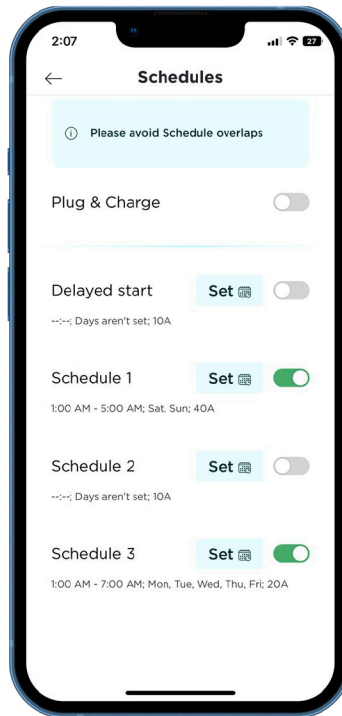

SCHEDULE

your charging during the most affordable rates

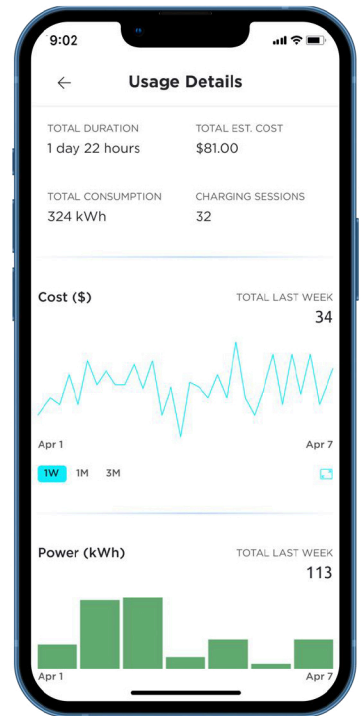

MONITOR

charge history, consumption and costs

PLUG & CHARGE

plug in for automatic charging at preset amperage

SMART TIPS

avoid conflicts of schedules, copy electricity plans periods and more

STAY INFORMED

with notifications and smart reminders

POWERFUL



9X FASTER CHARGING

Up to 46 miles/hour
(48A hardwired version)
Up to 38 miles/hour
(40A plug-in version)



ADJUSTABLE AMPERAGE

Dip switch inside the device
and app slider



NEMA 4 + IP66

Indoor/outdoor use.
Choose where to install



CERTIFICATES

Safe and qualifies for
rebates and incentives



COMPATIBILITY

NACS connector




CONVINIENT

Extra long 25 ft cable.
Forget about extenders

EVIPOWER™ GEN2 by EVIQO™

LEVEL 2 SMART EV CHARGER

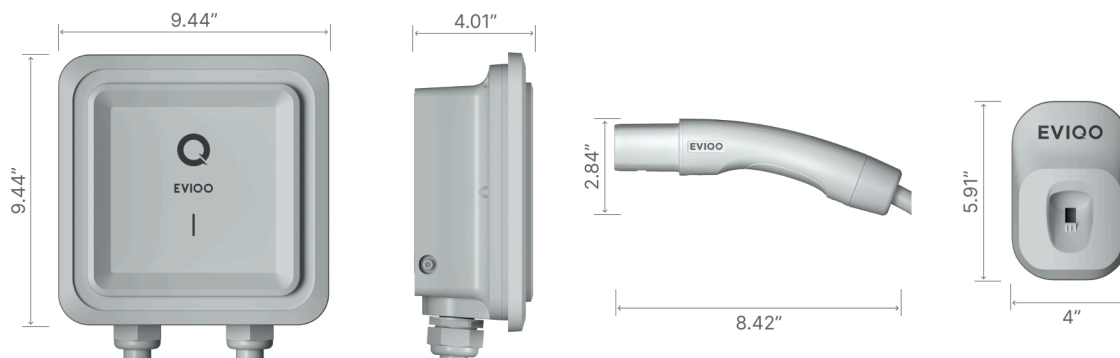

SPECIFICATIONS

MODEL NAME	EVIPOWER 2
INPUT/OUTPUT POWER RATING & CURRENT	Plug-In version: 9.6kW default (240V AC, 40A). Hardwired version: 11.5kW default (240V AC, 48A). Output amperage is adjustable via the Amperage Dip Switch at 16A, 32A, 40A (default plug-in max), 48A (default hardwire) or 50A (hardwire max). Once set, the current can be adjusted via the EVIQO app from 6A to the selected maximum in 1A increments.
RESET BUTTON & SWITCH MODE	Quick troubleshooting and switch mode for precondition activation, ensuring seamless vehicle integration.
INPUT/OUTPUT VOLTAGE	208V - 240V AC
AC POWER FREQUENCY	60 Hz
WIRING	L1/L2/PE
SUPPLIED POWER CABLE	Plug-In version: 3.2 ft with NEMA 14-50 plug Hardwired version: 3.3 ft with liquid tight fitting and flexible conduit
OUTPUT CABLE	25 ft Extra Long
CONNECTOR TYPE	NACS - button activates signal frequency to open the charging port on compatible cars (Tesla).
OUTPUT CABLE MANAGEMENT	Holster included
GROUND FAULT DETECTION	20mA CCID
PROTECTION TYPES	Overcurrent, Current Leakage, Overvoltage, Undervoltage, Overheat, Surge Protection, Relay Fault Detection, Control Pilot Fault Detection, Voltmeter Fault Detection

OPERATIONAL RATINGS

ENCLOSURE RATING	NEMA 4
INGRESS PROTECTION RATING	IP66
OPERATING TEMPERATURE RANGE	-22°F to 131°F (-30°C to 55°C)
STORAGE TEMPERATURE RANGE	-40°F to 167°F (-40°C to 75°C)
RELATIVE OPERATION HUMIDITY	Up to 95% non-condensing
RELATIVE STORAGE HUMIDITY	Up to 95% non-condensing
INSTALLATION TYPE	Wall Mounting or Pedestal
DIMENSIONS (H×W×D)	9.44 x 9.44 x 4.01 inches (24 x 24 x 10.2 cm)
WEIGHT TOTAL (CHARGER, OUTPUT/INPUT CABLES, CONNECTOR & HOLSTER)	19.9 lb / 9.03 kg

EVIPOWER™ GEN2 by EVIQO™

LEVEL 2 SMART EV CHARGER

USER INTERFACE

STATUS INDICATION	LED/APP
USER INTERFACE	EVIQO mobile app; EVIQO web console app
NETWORK CONNECTION	Wi-Fi 2.4G Extended Antenna
SOFTWARE UPDATE	OTA

CERTIFICATION & STANDARDS

CERTIFICATES	ETL, Energy Star, FCC
COMPLIANCE STANDARDS	UL2594, UL2231-1, UL2231-2, UL2251, UL62, UL991, UL1998, NNFPA 70 Article 625, UL840, CSA C22.2 No. 280
EMC COMPLIANCE	FCC 15 Class B
WARRANTY	3 years

