

NEW Energy Efficient 23w Architectural LED Compact Sconces

Hubbell Outdoor Lighting's compact LED sconces are designed for entry and perimeter lighting from mounting heights of 8-12ft. Use where full cutoff light control is required. Typical applications are commercial, multi-family and high end residential locations.

Key Features & Benefits

- Decorative, durable die-cast aluminum housing and door
- Compact sizes complement large geometric sconce family
- 5000K High CRI LEDs
- 23watt – 1184 lumens – 51 LPW
- Lensed LED optics for wide distribution- no uplight, neighbor friendly
- Universal voltage driver, 120-277V*, 50/60 Hz
- Long life - 50,000 hr (L70)
- Mounting/Spacing
 - 8-12 ft mounting height
 - 25-35 ft lateral spacing
 - Quick-mount allows easy installation – never open the fixture!
 - Dark Bronze architectural powder finish
 - Listed to UL1598 for use in wet locations
 - Five year limited warranty

* In Canada, certified for 120-240V



QSPC



RDIC



TRPC


COMPACT SCONCE DESIGN FEATURES



Die-cast aluminum construction



Lensed LEDs for wide spread

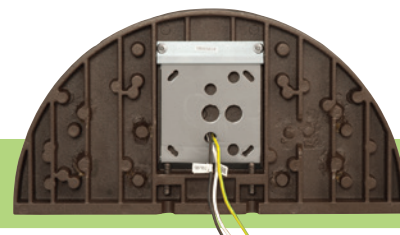

**Quick mount adapter
for easy installation**

ORDERING INFORMATION



QSPC



RDIC



TRPC



SERIES

QSPC Quarter
Sphere
Compact
Wallpack
TRPC⁵ Trapezoid
Compact
Wallpack
RDIC Radius
Compact
Wallpack



WATTAGE/SOURCE/VOLTAGE

Pulse Start
70P8 70w, Quad-Tap®
CFL¹
42F8^{2,3} 42w, Quad-Tap®
42F9² 42w, 120/277V (BZ
only)
LED^{3,4}
13LU-5K 13 LEDs, 120-277V
(BZ only)



FINISH

BZ Bronze
PL Platinum



OPTIONS

BOC² 0°C battery backup for CFL lamp provides 90
minutes backup power. Option only available
on 42F9 version.

1 CFL lamp is 4-pin, 3500K

2 42F9 is only listing with BOC option

3 Available in Bronze finish only, 42F8 not available in QSPC and TRPC

4 LED option is 1184 lumens; 23.3 input watts; 5000K color temperature

5 TRPC not available in TRPC-42F8-PL or TRPPC-70P8-BZ

* We carry 18 Stock SKUs!

