



POLITECNICO DI MILANO

SOFTWARE ENGINEERING II PROJECT

**SAFEStreETS**

---

# Design Document

*Authors:*

Mattia CALABRESE  
Federico CAPACCIO  
Amedeo CAVALLO

*Professor:*

Elisabetta DI NITTO

December 9, 2019

version 1.0

## Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Purpose of this document . . . . .	1
1.2	Scope . . . . .	1
1.3	Glossary . . . . .	1
1.3.1	Definitions . . . . .	1
1.3.2	Acronyms . . . . .	1
1.3.3	Abbreviations . . . . .	2
1.4	Reference documents . . . . .	2
1.5	Document overview . . . . .	2
<b>2</b>	<b>Architectural design</b>	<b>3</b>
2.1	Overview . . . . .	3
2.1.1	Context viewpoint . . . . .	3
2.1.2	Composition viewpoint . . . . .	3
2.2	Component view . . . . .	5
2.2.1	DB component . . . . .	7
2.2.2	Server component . . . . .	9
2.3	Deployment view . . . . .	14
2.3.1	Four tier architecture . . . . .	14
2.3.2	Implementation choices . . . . .	16
2.3.3	Decision Tree . . . . .	17
2.3.4	Deployment diagram . . . . .	18
2.4	Runtime view . . . . .	20
2.4.1	Upload . . . . .	20
2.4.2	Map request . . . . .	21
2.4.3	Show statistic . . . . .	22
2.4.4	See user info . . . . .	23
2.4.5	Validate reports . . . . .	24
2.4.6	Send data to municipality . . . . .	25
2.5	Component interfaces . . . . .	26
2.5.1	Car-server interfaces . . . . .	26
2.5.2	Maintenance API interface . . . . .	26
2.5.3	User Application interface . . . . .	27
2.5.4	Customer Care interface . . . . .	27
2.5.5	GIS API . . . . .	27
2.5.6	DBMS API . . . . .	27
2.5.7	Payments API . . . . .	28
<b>3</b>	<b>User interface design</b>	<b>29</b>
3.1	User app . . . . .	29
3.2	Validation Service app . . . . .	30
3.2.1	Home page . . . . .	30
3.2.2	List of Reports and Violations . . . . .	31
<b>4</b>	<b>Requirements traceability</b>	<b>32</b>
4.1	Functional requirements . . . . .	32
4.2	Non functional requirements . . . . .	33

<b>5</b>	<b>Implementation, integration and test plan</b>	<b>34</b>
5.1	Server . . . . .	34
5.2	UserApplication features . . . . .	34
5.3	Municipality features . . . . .	35
5.4	Integration . . . . .	35
5.4.1	Integration of the internal components of the Server . . .	36
5.4.2	Integration of the frontend with the backend . . . . .	36
5.4.3	Integration with the external services . . . . .	37
	<b>Appendices</b>	<b>38</b>
<b>A</b>	<b>Software and tools used</b>	<b>38</b>
<b>B</b>	<b>Hours of work</b>	<b>38</b>
<b>C</b>	<b>Changelog</b>	<b>38</b>

## List of Figures

1	Context viewpoint . . . . .	3
2	Client Server architecture . . . . .	3
3	Composition viewpoint . . . . .	4
4	High-level components . . . . .	5
5	ER model . . . . .	7
6	Server component . . . . .	9
7	<i>MapHandler</i> object diagram . . . . .	10
8	<i>SubmissionHandler</i> object diagram . . . . .	11
9	<i>AccessHandler</i> object diagram . . . . .	11
10	<i>Data Provider</i> object diagram . . . . .	12
11	<i>APIHandler</i> object diagram . . . . .	13
12	Four tier architecture with internet layer . . . . .	14
13	Mapping server component on architecture . . . . .	15
14	Decision Tree . . . . .	17
15	Deployment diagram . . . . .	18
16	<i>Upload submission</i> sequence diagram . . . . .	20
17	<i>Map request</i> sequence diagram . . . . .	21
18	<i>Show statistic</i> sequence diagram . . . . .	22
19	<i>See user info</i> sequence diagram . . . . .	23
20	<i>Validate reports</i> sequence diagram . . . . .	24
21	<i>Send data to municipality</i> sequence diagram . . . . .	25
22	<i>Send data to municipality</i> sequence diagram . . . . .	26
23	<i>UX Diagram - User</i> . . . . .	29
24	<i>Validation service home page</i> mockup . . . . .	30
25	<i>Validation service reports and violations list</i> mockup . . . . .	31
26	User data integration . . . . .	36
27	Submissions and violations data integration . . . . .	36
28	Statistics and map data integration . . . . .	36
29	Municipality API data integration . . . . .	37
30	User app integration . . . . .	37
31	Validation Service integration . . . . .	37

## List of Tables

1	Mapping goals on components . . . . .	32
2	Users features . . . . .	34
3	Municipality features . . . . .	35

# 1 Introduction

## 1.1 Purpose of this document

In this document we are going to describe software design and architecture of the SafeStreets system.

The software architecture of a system is the structure or structures of the system, which comprise software elements, the externally visible properties of those elements, and the relationships among them.[1]

## 1.2 Scope

SafeStreets is a crowd-sourced application that intends to provide users with the possibility to notify authorities when traffic violations occur, and in particular parking violations.

The system allows users to send pictures of violations, including suitable metadata, to authorities. Examples of violations are vehicles parked in the middle of bike lanes or in places reserved for people with disabilities, double parking, and so on. In addition, the system allows users to mine the previously stored information, for example by highlighting the streets (and the areas) with the highest frequency of violations, or by showing different types of statistics built upon the collected data.

The system will also provide a communication interface to the municipality's provided service to create a secure bridge for data transfer. This connection will enable SafeStreets to cross its data with municipality's to make analysis and build different types of statistics. Moreover the system will offer back to the municipality the possibility to retrieve information about the violations in order to generate traffic tickets from it and receive suggestions on possible interventions.[2]

## 1.3 Glossary

The *SafeStreets: Requirements Analysis and Specification Document*[3] should be referenced for terms not defined in this section.

### 1.3.1 Definitions

### 1.3.2 Acronyms

**RASD:** Requirements Analysis and Specification Document

**DD:** Design Document

**API:** Application Programming Interface

**GPS:** Global Position System

**DB:** DataBase

**DBMS:** DataBase Management System

**GIS:** Geographic Information System

**ER:** Entity Relationship Model

**XML:** eXtensible Markup Language

**REST API:** REpresentational State Transfer API

**JAX-RS:** JAVA API for REST Web Services

**ISP:** Internet Service Provider

**ARP:** Address Resolution Protocol

### 1.3.3 Abbreviations

**m:** meters (with multiples and submultiples)

**w.r.t.:** with respect to

**i.d.:** id est

**i.f.f.:** if and only if

**e.g.:** exempli gratia

**etc.:** et cetera

## 1.4 Reference documents

Context, domain assumptions, goals, requirements and system interfaces are all described in the *SafeStreets: Requirements Analysis and Specification Document*. [3]

## 1.5 Document overview

This document is structured as

1. **Introduction:** it provides an overview of the entire document
2. **Architectural design:** it describes different views of components and their interactions
3. **User interface design:** it provides an overview on how the user interfaces of our system will look like
4. **Requirements traceability:** it explains how the requirements we have defined in the RASD map to the design elements that we have defined in this document.
5. **Implementation, integration and test plan:** it focuses on the implementation and testing strategies that will be adopted to build the system

## 2 Architectural design

### 2.1 Overview

#### 2.1.1 Context viewpoint

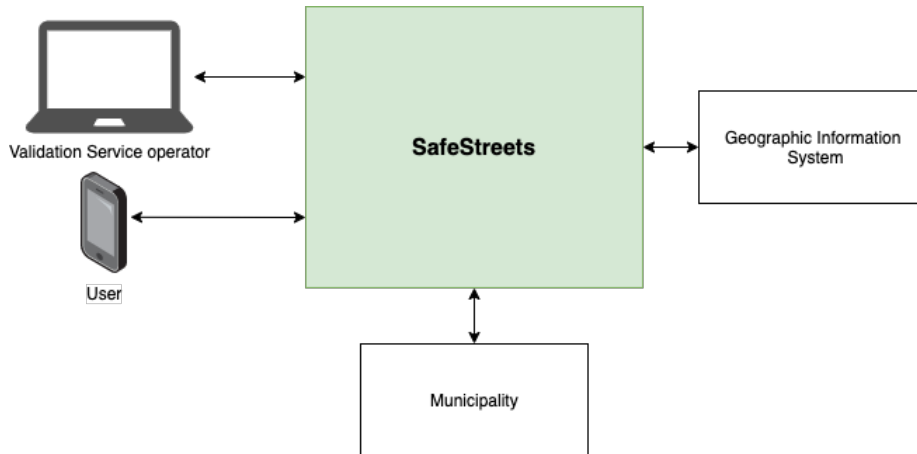


Figure 1: Context viewpoint

The system will interact with three actors: users, the Municipality and the Geographic Information System. Moreover we recognize that in most of the interactions the system is providing a service to agents so, after taking in consideration different alternatives, we decided to use a client-server architectural approach.

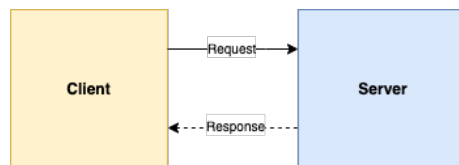


Figure 2: Client Server architecture

#### 2.1.2 Composition viewpoint

Going deeper in the analysis of our system composition, we are able to identify some of the modules that will be required in order to provide the functionalities specified in the Requirement Analysis and Specification Document.

**Communication Interfaces** Since our system interacts with many external agents, it needs to have different *Communication Interfaces* in order to communicate with them.

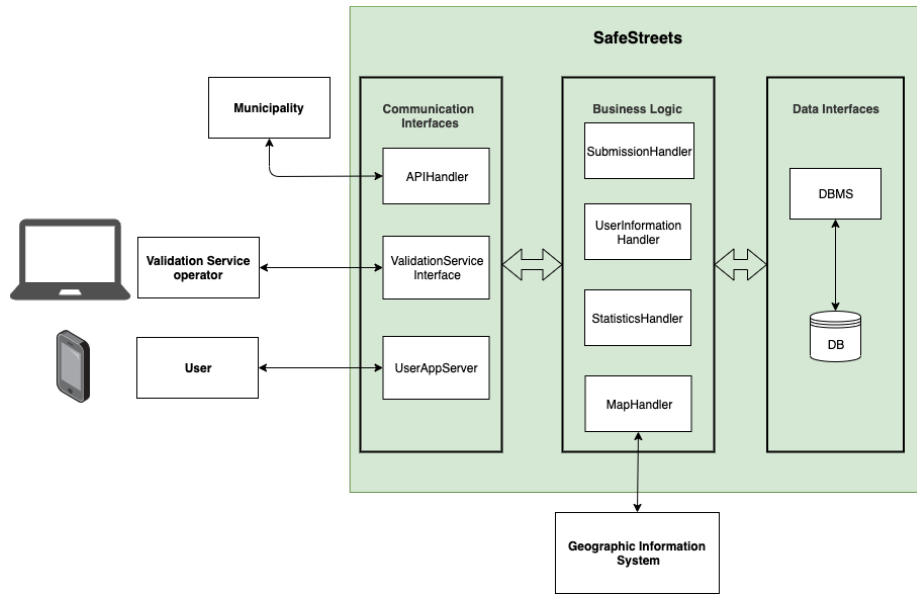


Figure 3: Composition viewpoint

- An API is needed to ensure that the *Municipality System* will be able to share information with our system
- A software module is needed in order to support the mobile app that will be offered to the users in order to exploit the functionalities of the system
- A software module is needed to provide the *Customer Care* the functionalities it needs

**Business Logic** The actual application logic of our system needs to manage the users information, reports and violations information; for each of these purposes several software modules are necessary; they will use communication interfaces to communicate with the agents and they will be able to retrieve data from the data interfaces.

**Data Interface** Our system needs a way to access and store the data it produces or retrieves from external resources, that is why *Data Interface* modules are needed. These modules allows interaction between the *Business Logic* modules and the System Databases; moreover they provide an interface to communicate with the GIS in order to allow the *Business Logic* modules to access its functionalities.



## 2.2 Component view

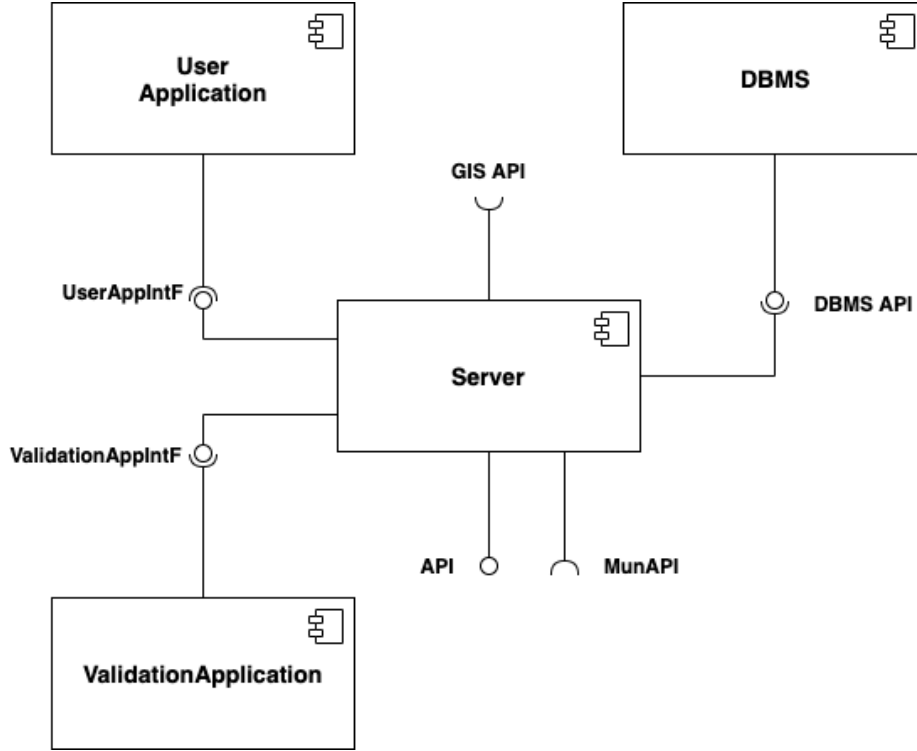


Figure 4: High-level components

Considering all the previous graphs, we have identified the following high level components and interfaces, shown in [Figure 4](#), implementing the functionalities defined in the RASD [3]:

- **User Application**

- Register
- Login
- Submit a new violation
- View the map with user's own previous submissions
- View the map with all the violations by street
- View the map with safe and unsafe areas
- Consult statistics about violations
- View and edit personal information

- **SafeStreets Operator Application**

- View each user profile, including personal information, submissions history and violations history
- Mark and unmark users as banned
- Analyse and approve (or reject) violation reports

- **DBMS**

- Store and retrieve data

- **GIS API**

- Retrieve a reference to an up-to-date map
- Enrich the map with the requested violations
- Enrich the map with graphics representing safe and unsafe areas

- **Municipality API**

- Retrieve information about accidents

- **API**

- Expose information about the submitted violations
- Suggest possible solutions to avoid violations

## 2.2.1 DB component

TIA

**ER model** In Figure 5 is represented the ER model of the system's database.

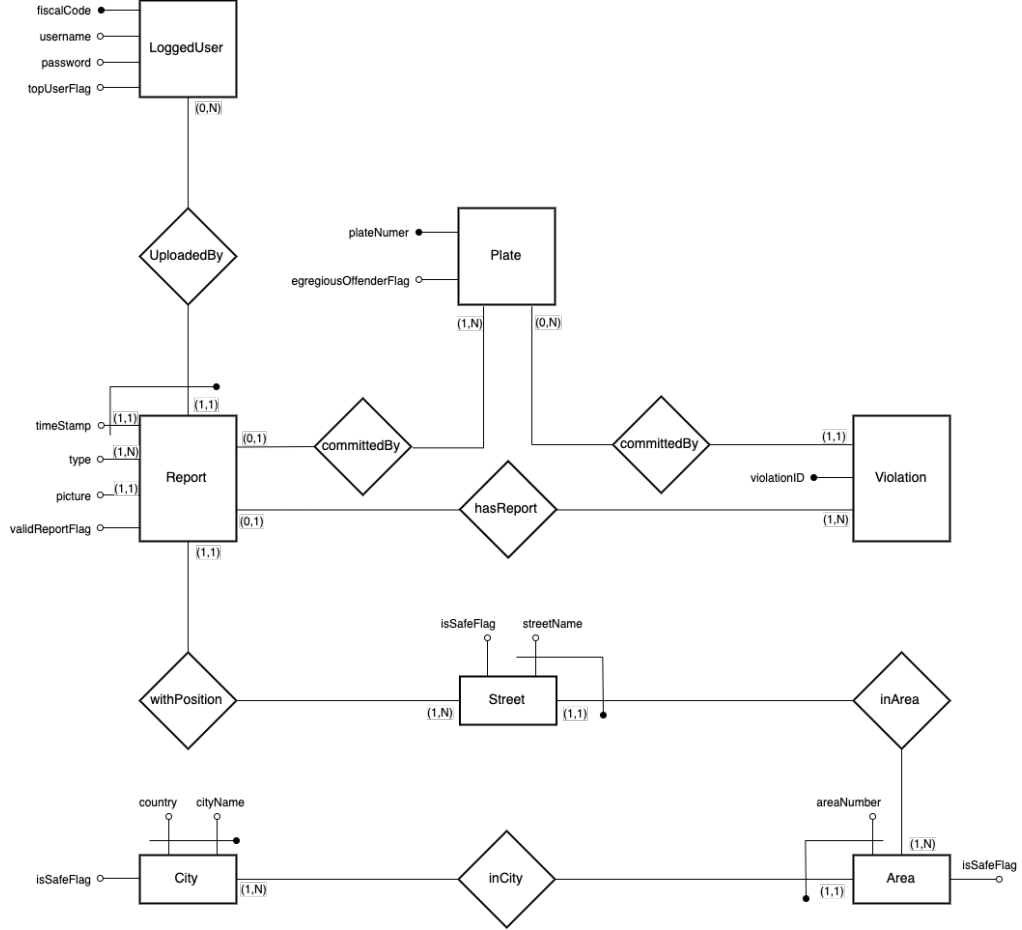


Figure 5: ER model

**Users** Beyond the primary key, the *email*, *drivingLicenseNumber* and *emailToken* attributes must be unique.

**Fees and discounts** Fees and discounts must be defined as sum of a fixed value and a percentage factor w.r.t. the base rent cost. The *appliedDiscount* and *appliedFee* payment attributes are determined, respectively, based upon the set of all *applicableDiscount* and *applicableFee* attributes associated to the rent. See payment algorithms for more details.

As particular example, the *OutOfSafeArea* fee, which is composed by a fixed amount plus a variable amount proportional to the *distance* of the car from the

nearest safe area, can be expressed as a fixed number of fees clustered w.r.t. distance.

**Cars** Beyond the primary key, the *licenseNumber* and *MACaddress* attributes must be unique. The *lastSeen* attribute is set by default to the timestamp of the last car information update. The *carStatus* attribute represents the car statuses as defined in the RASD.

**Payment status** There are three possible payment status:

- *Pending*: a payment transaction request has been sent to the external payment system
- *Confirmed*: the payment transaction has been successfully executed
- *Rejected*: the payment transaction has failed

The default state for a payment is *Pending*.

**Failures** A failure is considered "open" (i.d. to be fixed) if the attribute *fixedTimestamp* is not present. A car can have at most one open failure.

**Safe areas** Safe areas are also provided as XML file according to the *GPX GPS Exchange Format* [?] and they are composed by closed polygonal chains.

**Safe areas and charging stations deployment** The position of charging stations and safe areas are processed and sent to cars through the dedicated primitive only in case of:

- system initialization (sent to all cars)
- changes in XML files (sent to all cars)
- new car (sent to one car)

**Security** Users' passwords and all credit card numbers (associated to users and used for past payments) must be stored with proper and secure encryption.

### 2.2.2 Server component

In this section, we illustrate the *Server* structure and its main components and interactions, in order to explain how interfaces, communication with external components and system functionalities are performed and managed.

The white box representation (Figure 6) shows the parts composing the *Server* component and their interactions by means of lollipop-socket notation. When designing this component's internal structure, several concerns and requirements were taken into account:

- All of its required and provided interfaces had to be delegated to some part of its internal structure
- All of the functionalities related to violation submission and report validation had to be addressed and provided by some parts of this component
- Interface specific parts had to be designed in order to communicate in different ways with different external components
- Associations between internal components needed to be clarified

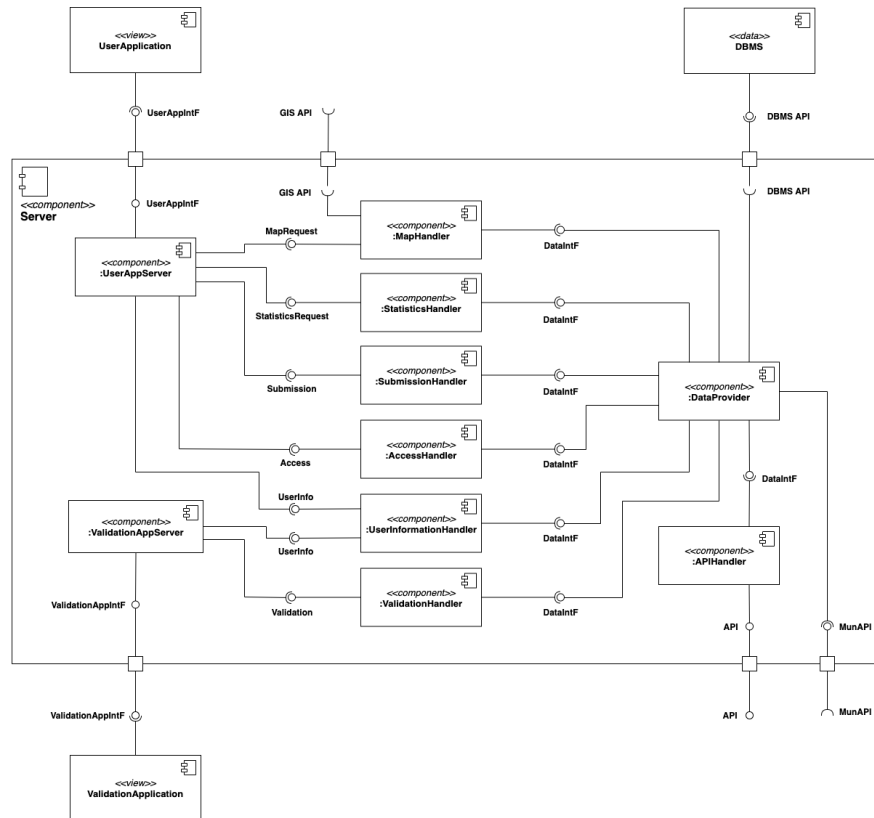


Figure 6: Server component

**UserAppServer** This component acts as an interface between the user and the application logic of the system: it receives users' violation submission requests or information consultation requests and routes them to the specific handler. This component solves the concerns related to the handling of the requests sent by the users without work loading the rest of the application logic. It also allows the decoupling of the application logic from the presentation logic, which has to be realised in a four tier client-server architecture.

**ValidationAppServer** This component provides the *ValidationApplication* client with the information that the operator needs in order to validate the reports submitted by the users and it finally registers the approval or rejection in the *DBMS*. This component was decoupled from the *UserAppServer* component for its structure, but it offers different functionalities and it is only used and accessible by a specific operator via the client application.

**MapHandler** This component processes the map visualisation requests performed by the users. It is supported by an external *GIS Service* to retrieve and enrich the map with the information requested. Each of its modules is in charge of retrieve the information to visualise and contact the map service, providing the necessary data. This approach allows the decoupling of the presentation logic from the application logic.

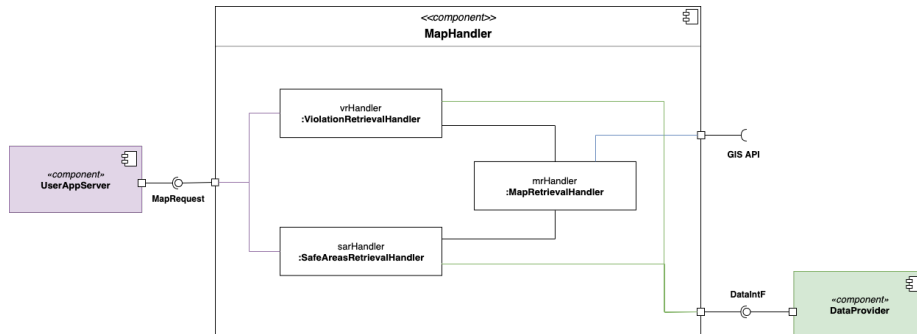
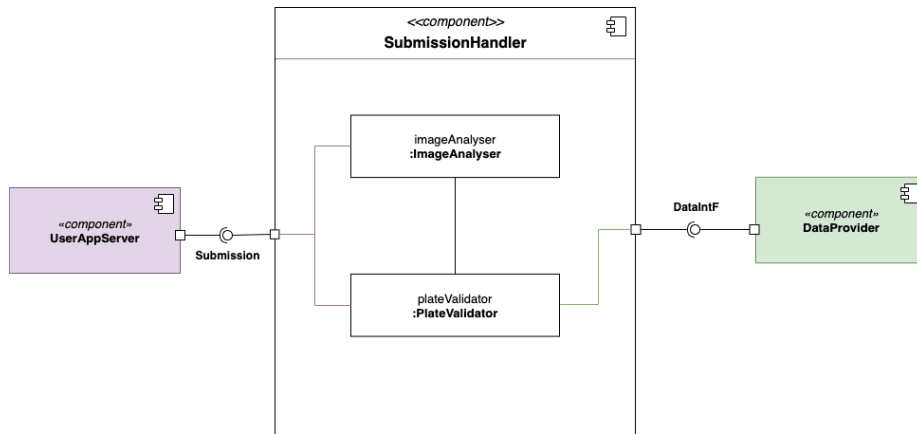



Figure 7: *MapHandler* object diagram

**StatisticsHandler** This component processes the statistics requests performed by the users, retrieving data from the *DBMS*, analysing it and turning it into the requested information, which can regard a general or more specific scope. Having a component for this specific purpose enhances decoupling in the system and provides a security layer for the integrity of the data.

**SubmissionHandler** This component processes the violation data submitted by the users and the *ImageAnalyser* module is involved to perform the recognition of the license plate in the picture. Finally, the *PlateValidator* module checks whether the recognised plate and possibly the manually inserted plate match and are valid. This data is stored as a report and later validated by the operator to eventually turn it into a violation.

Figure 8: *SubmissionHandler* object diagram

**AccessHandler** This component manages the registration and login phase of the users, encapsulating the logic required to verify the credentials or register new user's information in the *DBMS*. Having a component for this specific purpose enhances decoupling in the system and ensures that these functionalities will not generate any changes in other components of the system.

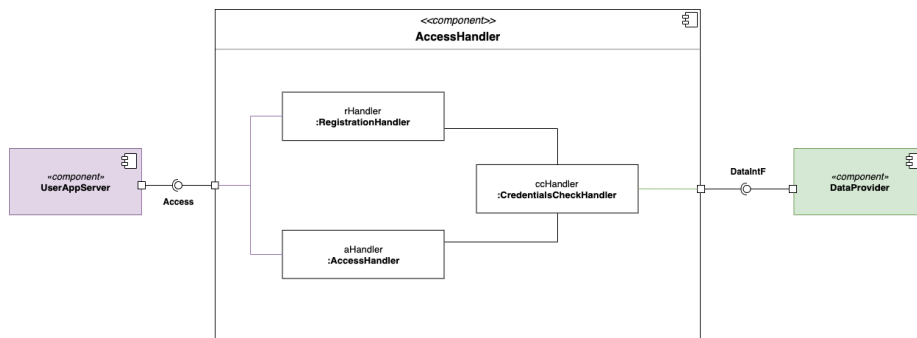Figure 9: *AccessHandler* object diagram

**UserInformationHandler** This component manages the user information present in the system and provides *UserAppServer* and *ValidationAppServer* the data accessible by the user, given his roles' permissions. The main purpose of this component is to secure users' data, avoiding unauthorised users to consult sensible information. The diagram in ?? shows the internal structure of the *UserInformationHandler* component and the delegation associations between the components interfaces involved.

**ValidationHandler** This component is used to provide the reports stored in the *DBMS* that still have to be validated to the *ValidationApplication*, in order to allow the *ValidationOperator* to evaluate the submission and decide to approve or reject it. The decision is then stored and the violations information are updated. This component is required to avoid possible malicious or involuntary wrong usages of the system by the customers, trying to submit an unreal violation.

**DataProvider** This component is in charge of providing a unified interface to access the different data sources of the System, both the *DBMS* and the files contained in the File System of the OS hosting the application logic. This component allows a better decoupling between the application logic components and the underlying data layer.

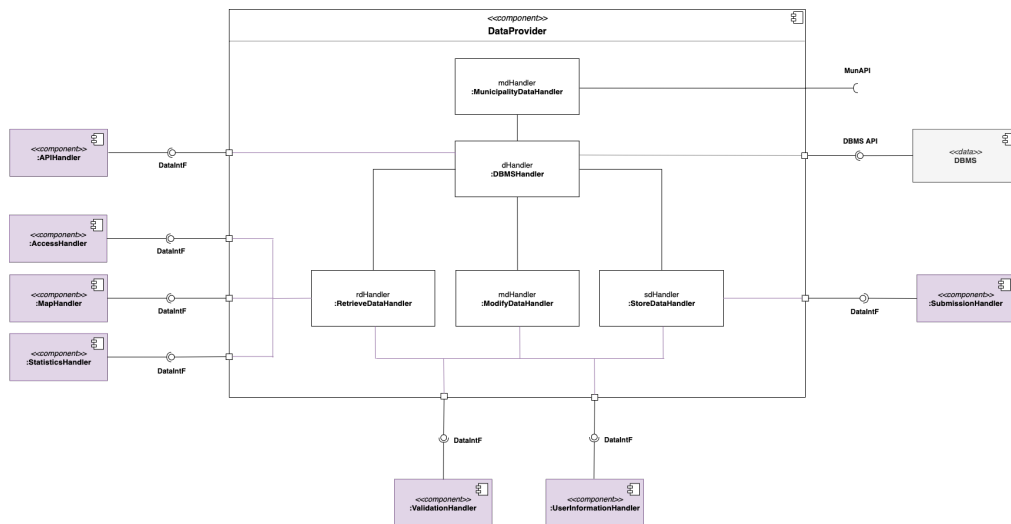


Figure 10: *Data Provider* object diagram



**APIHandler** This component is used to manage the authorities requests of accessing informations about submitted violations. The *SecurityChecker* module guarantees that only authorised municipalities is allowed to retrieve that data. Having a component for this specific purpose enhances decoupling between the presentation layer and the data layer, ensuring data reservation and protection. Figure 11 shows the internal structure of this component.

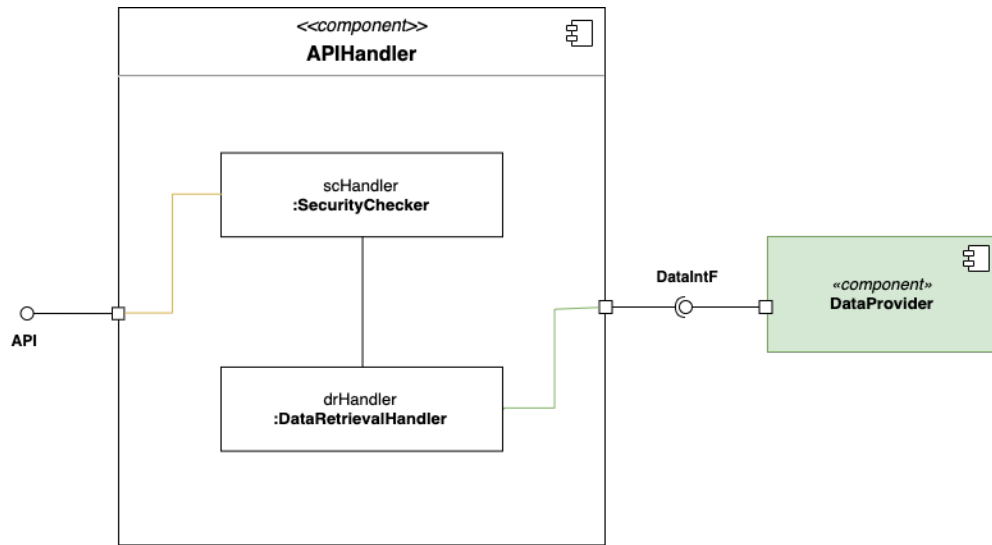


Figure 11: *APIHandler* object diagram

## 2.3 Deployment view

### 2.3.1 Four tier architecture

Taking into account that:

- the *Composition viewpoint* diagram shows the need of database decoupling from the actual system
- in the *Server component view* we can clearly distinguish modules who take care of presentation and communication with the client
- in the *Server component view* we can clearly distinguish modules who take care of the specific application logic

we decided to design the system on a four tier architecture pattern.

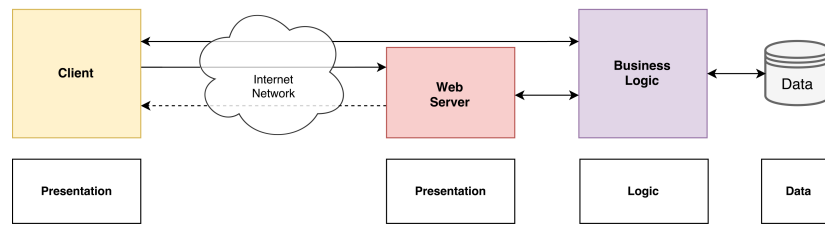


Figure 12: Four tier architecture with internet layer

**Mapping of Server components on architecture:** to clarify at a finer level how the Server components are mapped in the four tier layered architecture the following diagram represents the Server components highlighted in the same color of the tier in the previous diagram:

- Client: components used by users in order to access the functionalities offered by the system
  - UserApplication
  - ValidationApplication
- Web Server: components which provides interfaces to clients in order to allow them to use functionalities offered by the system
  - ValidationAppServer
- Business Logic: components which realizes the functionalities offered by the system
  - UserAppServer
  - MapHandler
  - StatisticsHandler

- SubmissionHandler
  - AccessHandler
  - UserInformationHandler
  - ValidationHandler
  - DataProvider
  - APIHandler
- Data: components which store and manage the access to the data produced and needed by the Business Logic
    - DBMS

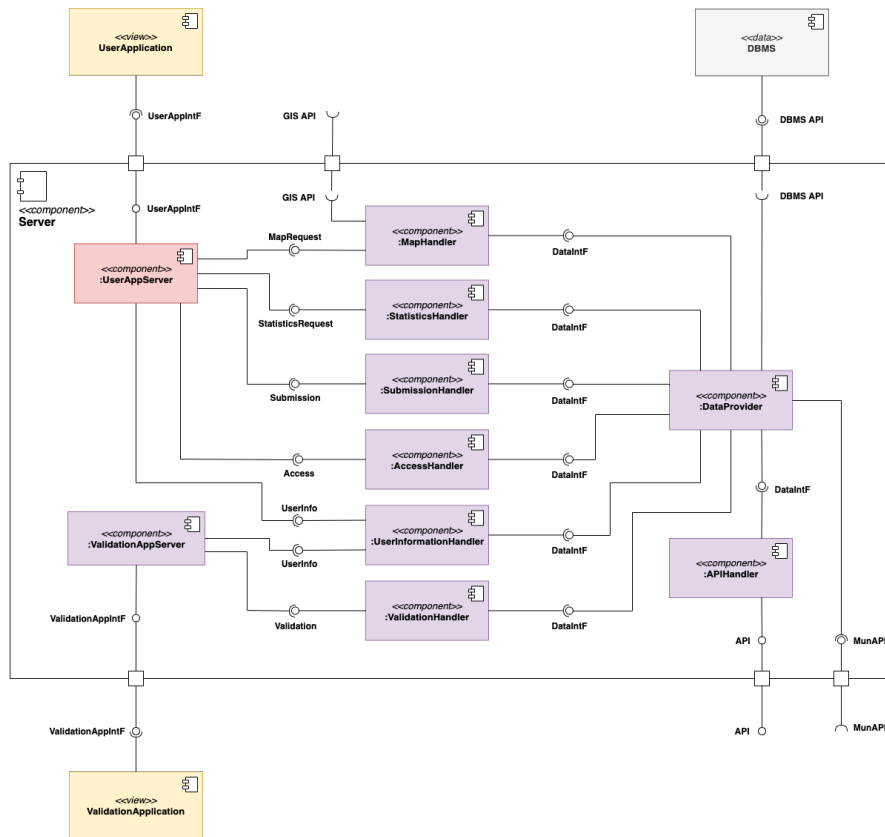


Figure 13: Mapping server component on architecture

### 2.3.2 Implementation choices

The following technologies were chosen for the implementation of the SafeStreets system. J2EE was the main choice we made because it offers a wide range of functionalities that makes the development of scalable multi tiered web based application much easier than with other technologies.

**Web Pages:** JSP was chosen over Servlets because the content of our web pages has few dynamic parts so writing small chunks of Java code in html pages is a more suitable solution

**Mobile App:** Java was chosen for server compatibility reasons and in order to deploy the app both on Android and on iOS

**Application Logic:** EJB were used to implement the Application Logic components since our application is developed using J2EE

**Application Server and Web Server:** GlassFish 5.1 was chosen since it offers containers both for the EJB and the JSP pages

**Provided APIs:** all the API provided by this system are compliant with the REST paradigm so JAX-RS was used

**Data - Application Logic Communication:** JPA over JDBC was chosen as a mean to enable communication between the Application Logic and the DBMS.

**Web Server - Application Logic Communication:** JNDI was chosen as a naming and directory service to allow the web servers to access the functionalities offered by the Application Logic

**DBMS:** MySQL was chosen as DBMS since it is the most popular and widespread and it has a lot of documentation and a big community of users; in combination with it we chose InnoDB which allows the usage of foreign keys

### 2.3.3 Decision Tree

Figure 14 represents a summary of the main design and implementation decisions that were made during the development of the architecture of the PowerEnJoy system.

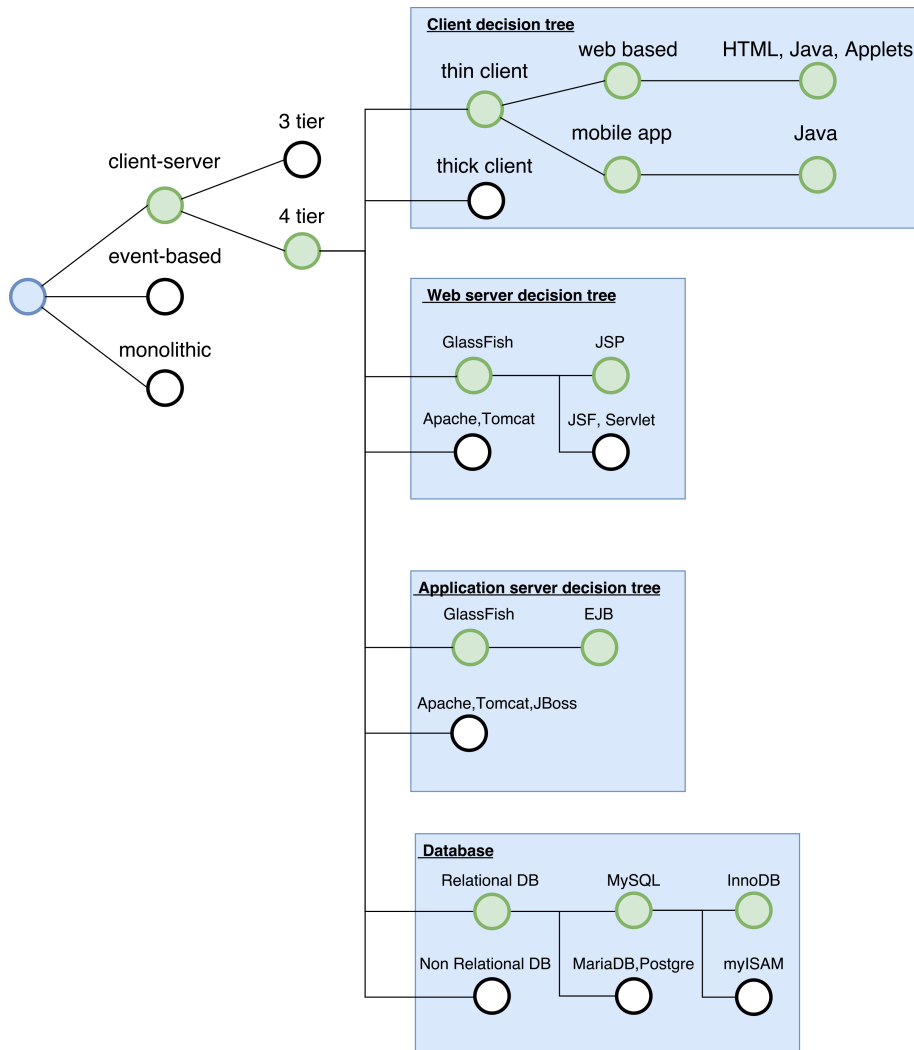


Figure 14: Decision Tree

## 2.3.4 Deployment diagram

The diagram in Figure 15 represents the mapping of the software components depicted in Figure 13 and Figure 4 on the devices that will run them. Many design concerns were considered while developing this solution.

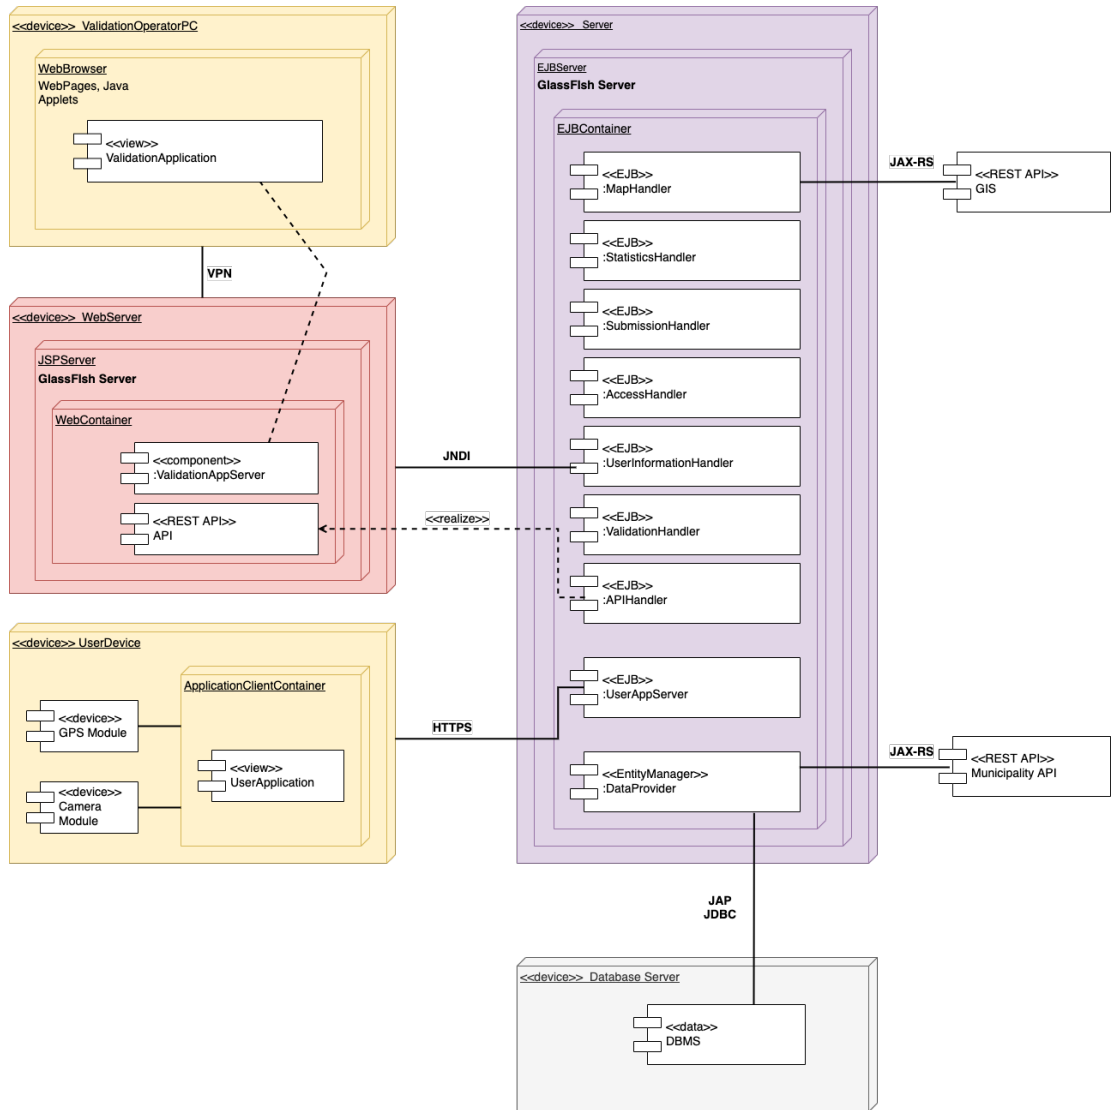


Figure 15: Deployment diagram

**Security:** security is ensured in different points of the architecture, in particular the *UserAppServer* uses HTTPS as communication protocol to communicate with the users; the devices running the *ValidationApplication* component are in a VPN with the device running the *ValidationAppServer*.

**Scalability:** this model of deployment is scalable in the sense that the system administrators will be able to add more devices and deploy more instances of the needed components when and where performance issues will arise, in order to maintain a minimum level of performance even with loads increase.

**Decoupling:** decoupling in this architecture is present at different levels; in the deployment diagram it is clear that the each of the four tier runs on different devices, moreover the *UserAppServer* component runs on a different device than the *ValidationAppServer*.

**Redundancy:** in this iteration of the architecture no redundancy of components or devices is present, but it is allowed in prevision of future expansions of the system's infrastructure.

**Fault Tolerance:** deploying different components on different machines allows the system to be easier to recover in case of a problem on one of the machines; for an example the Web Server running the *ValidationAppServer* component goes down, it can be replaced with another machine and in the mean time the *ApplicationServer* would still be up and running and still be able to provide the *UserApplication* with its functionalities.

## 2.4 Runtime view

In this section we represent some runtime views of the supposed interactions between the components of the *SafeStreets* system.

**Notes to read the diagram** When an attribute is modified in a JPA object the changes are reflected into the *DataProviderComponent* in order to keep the database updated. The *Login Phase* is represented only in the first diagram in order to show how it will be performed but will no be repeated in every diagram in order to improve readability.

### 2.4.1 Upload

The sequence diagram in [Figure 16](#) shows how the upload of a report is handled in the Server component of the system.

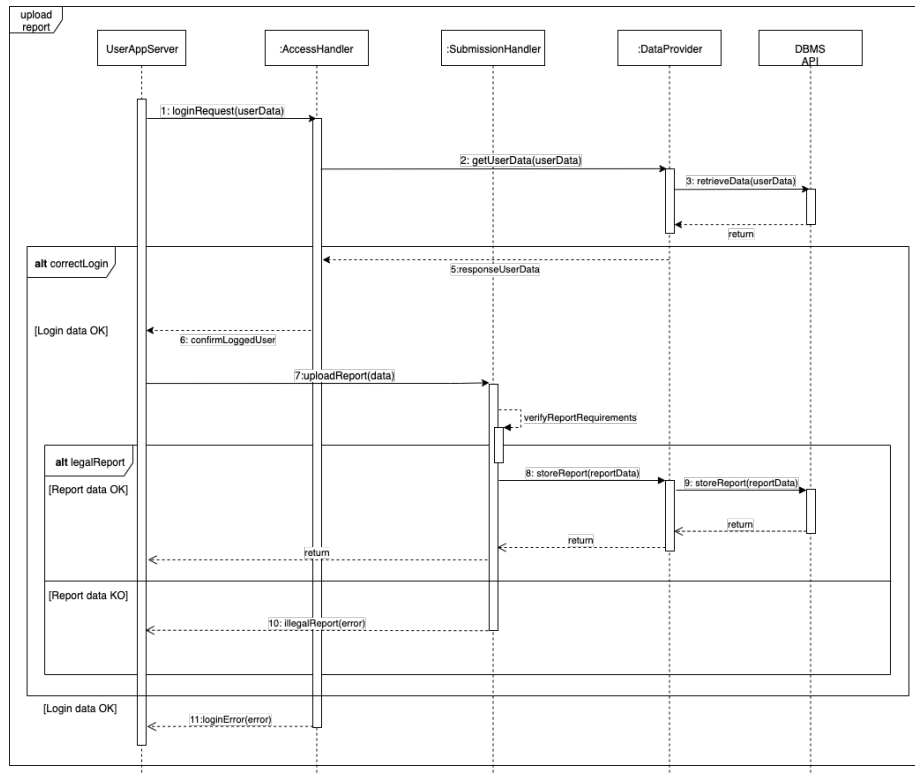


Figure 16: *Upload submission* sequence diagram



**Note** As already stated in the following diagrams we will assume that the user has already logged in correctly in order to focus on the purpose of the diagram.

### 2.4.2 Map request

The sequence diagram in [Figure 17](#) shows the map request process.

#### Interactions not represented

- The *MapHandler* needs an interaction with the GIS while calling its "processUserDataForMap()" method to process latitude and longitude information needed to generate the "userData" to query the DBMS.
- To improve readability of the diagram we omitted the interaction between the *DataProvider* and the *Municipality API* since the first checks if the latter has new data regarding the interested area of the map requested before returning data

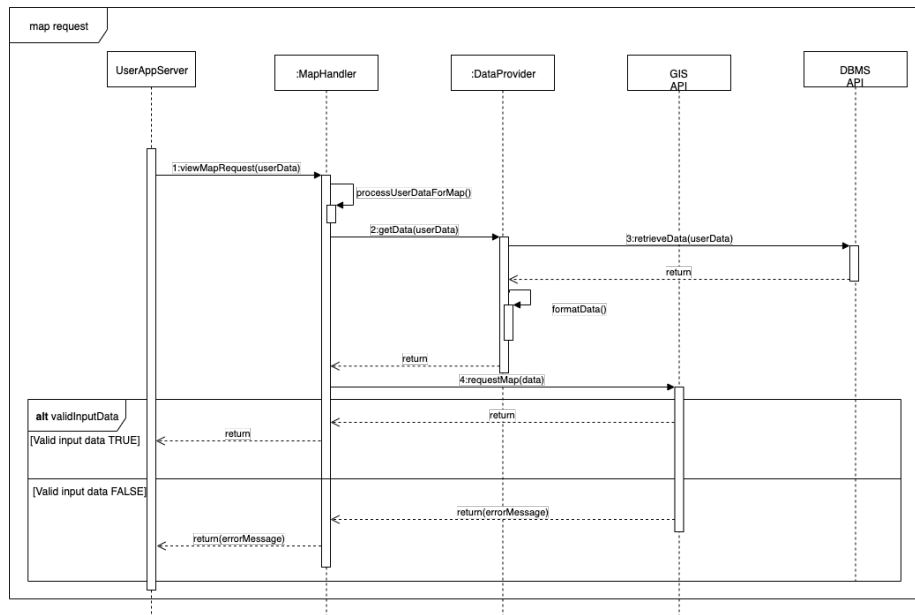


Figure 17: *Map request* sequence diagram

## 2.4.3 Show statistic

The sequence diagram in [Figure 18](#) shows the interactions between the modules involved in the process of retrieving data for a certain statistic and show it to the user.

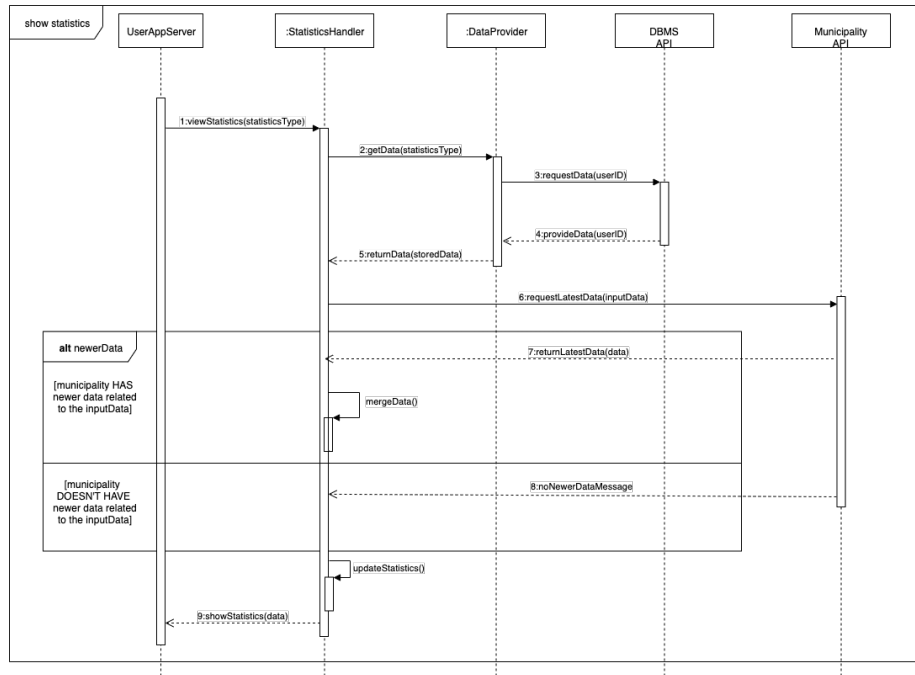


Figure 18: *Show statistic* sequence diagram

#### 2.4.4 See user info

The sequence diagram in [Figure 19](#) shows the interactions between the modules involved in the process of retrieving data of a certain user and show it to the *ValidationApplication*.

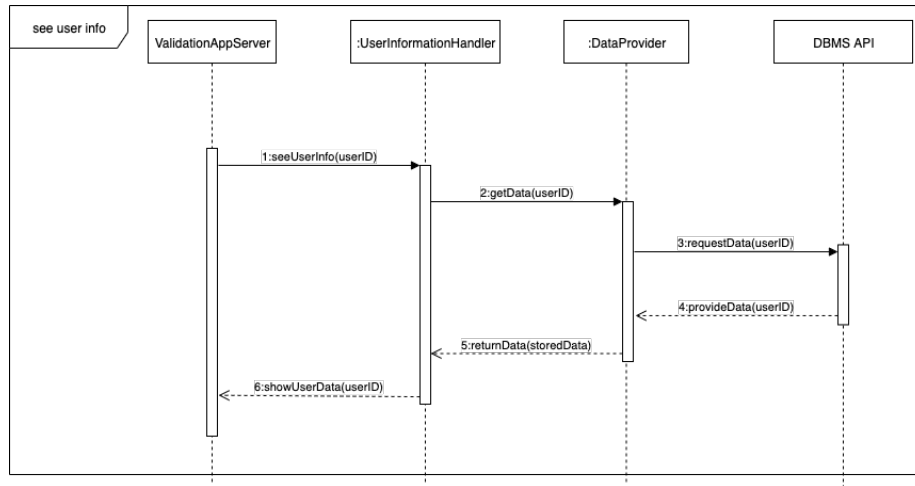


Figure 19: *See user info* sequence diagram

### 2.4.5 Validate reports

The sequence diagram in [Figure 20](#) shows the interactions between the modules involved in the process of validating the submitted reports, performed by the *ValidationApplication*.

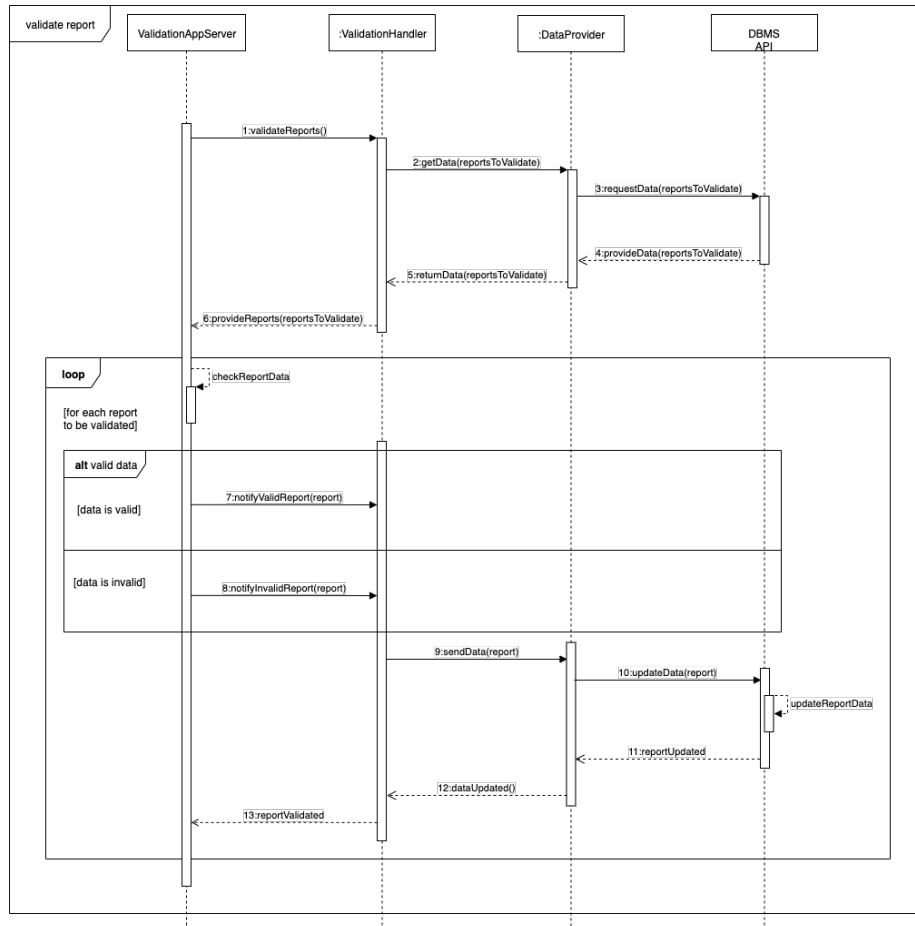


Figure 20: *Validate reports* sequence diagram

### 2.4.6 Send data to municipality

The sequence diagram in [Figure 22](#) shows the interactions between the modules involved in the process of providing violations data to the municipality.

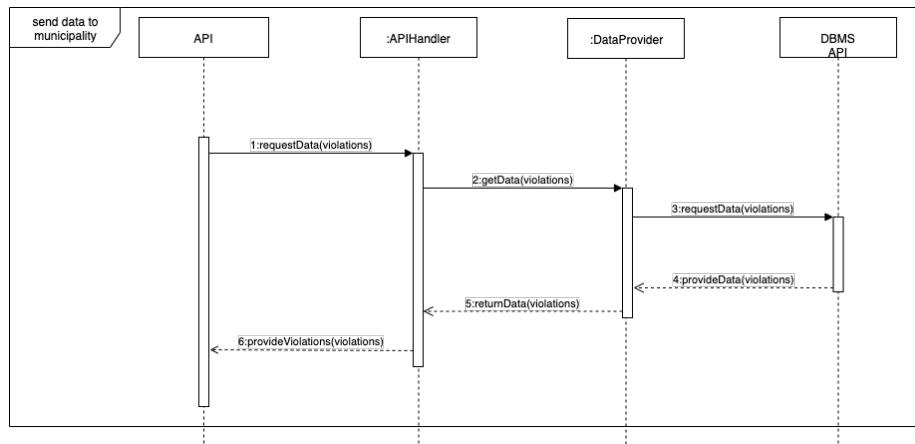


Figure 21: *Send data to municipality* sequence diagram

## 2.5 Component interfaces

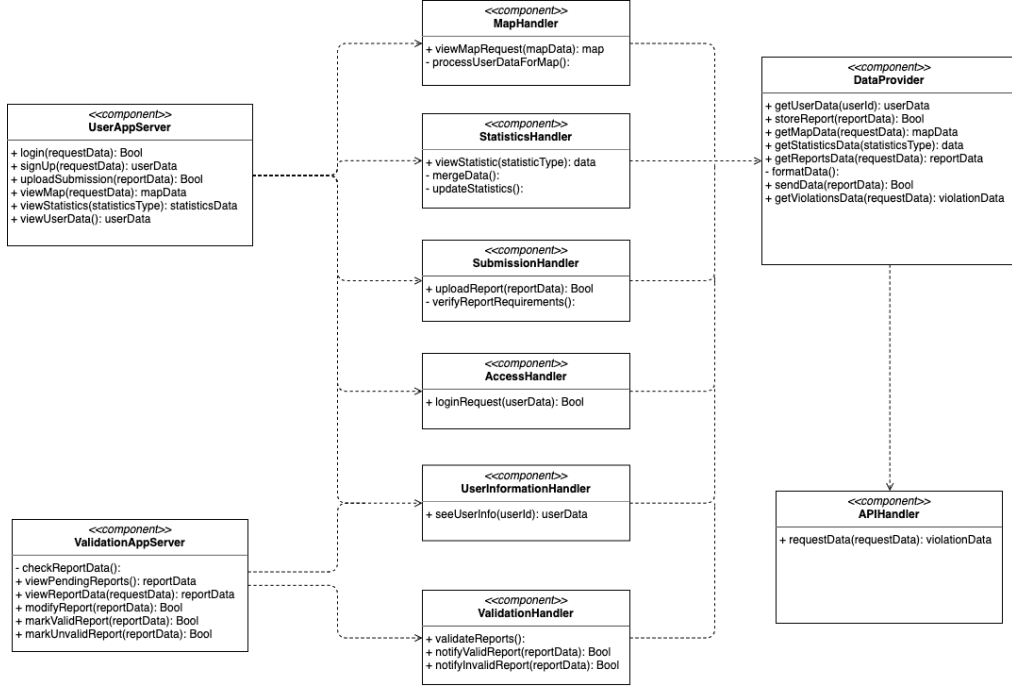


Figure 22: *Send data to municipality* sequence diagram

### 2.5.1 Car-server interfaces

All cars are provided with a module that grants TCP/IP connectivity over a dedicated subnet offered by a specific ISP. In order to ensure better security for the communications, in the same subnet is also located the server with the *CarEventHandler* interface and the API used by Maintenance.

The *CarHandler* component communicates to cars via the *CarPrimitives* external API provided by cars (using the JAX-RS API) which executes functions directly on their modules.

A specific car is reach by the system using its IP address or via ARP protocol using the *MACaddress* database attribute when the IP is unknown.

### 2.5.2 Maintenance API interface

The Maintenance API must be realized using the REST paradigm. The external maintenance system should query the Maintenance API at predefined time intervals in order to retrieve an updated list of car failures paired with proper software keys in order to unlock the doors.

Considering the importance of the operations performed, these security measures must be taken into consideration:

- The API must be accessible only over the system dedicated subnet
- A security token must be provided in order to perform any action through the API

The maintenance operators have been provided a smartphone which is connected in the same dedicated subnet used for cars and for the server with the Maintenance API. Security tokens must be negotiated by our system and the external maintenance service.

### 2.5.3 User Application interface

The *UserAppIntF* interface is responsible for communications between the user application and the user application server.

Because of the nature of exchanged data (credit card number, password, and privacy-related information), the protocol to be used is HTTPS.

### 2.5.4 Customer Care interface

Via the *CustomerCareIntF* interface is responsible for communications between the customer care application and the CustomerCare server.

All computers used by the customer care service are connected in the same dedicated subnet as the CustomerCare server and this web server is accessible only from the aforementioned subnet.

A VPN is used to achieve what mentioned above. Because of corporate data exchange, the protocol to be used is HTTPS

### 2.5.5 GIS API

Using this external API of a *Geographical Information System* our system is able to:

- retrieve a reference to an up-to-date map centered on a given position
- add pointers to the aforementioned map
- get the latitude and longitude of a given location and vice versa

The *UserApplication* component loads and shows the map using its reference.

### 2.5.6 DBMS API

Through the DBMS API the system can retrieve and write data into the database. Note that the *DataProvider* component is the only one that access directly this interface.

### 2.5.7 Payments API

Payment transactions are processed using this external API of a *Web based electronic payment system*.

Information required from this API are in order to complete a payment transaction (fetched from the database):

- name and surname of the payer
- due amount
- credit card number

Data encryption must be taken into consideration.

The API response must be the payment outcome in JSON format (succeeded or rejected).



### 3 User interface design

In this section are presented or referenced some mockups of the main features and related user interfaces the system is supposed to offer to the user and to the validation service through the proper web-based application.

Mockups show how the user interface is supposed to offer to the user the possibility to interact and make request to the system (obviously such user's interactions will result in a client-server communication of the user/validation service app view with the related server component based on the protocol chosen for that communication).

The main goal of our mockups design process is to build an interface that clearly distinguish functionalities offered by the system taking into account the architectural decoupling offered by the taken design choices.

#### 3.1 User app

The user app mockups have been discussed and presented in the User Interfaces section of the *SafeStreets: Requirements Analysis and Specification Document* [3]. For further implementation details refer to the [Implementation Choices](#) section of this document.

In addition we present the UX diagram to show the flow which the user will follow to navigate inside the application, in accordance with the mockups specified in the RASD:

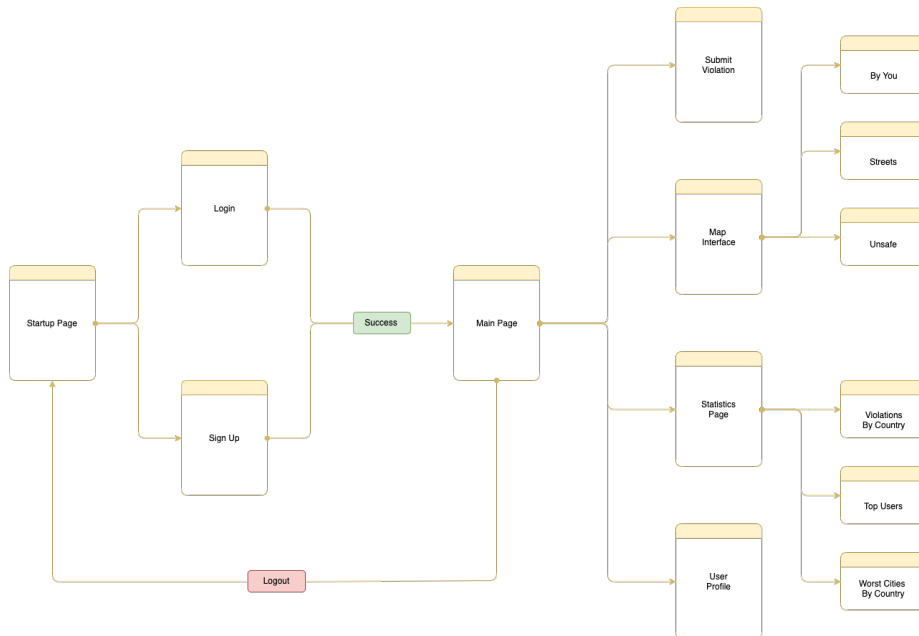


Figure 23: UX Diagram - User

## 3.2 Validation Service app

The validation service app has a simple interface in order to provide features to validation service operator in a clear and simple way. This interface must be optimized for a desktop monitor size.

### 3.2.1 Home page

All main features are accessible directly from the home page to provide a rapid and intuitive access to them.

From the home page the operator can:

- Visualize the pending reports of possibly occurred accidents
- Select a specific report to visualize all the stored data regarding it
- Visualize the result of the image recognition algorithms associated to the selected report
- Furtherly support the image recognition by manually modifying the report license plate if not present, wrongly typed by the user, or totally not recognized
- Mark and unmark reports as valid in order to filter valid and not valid user's submissions

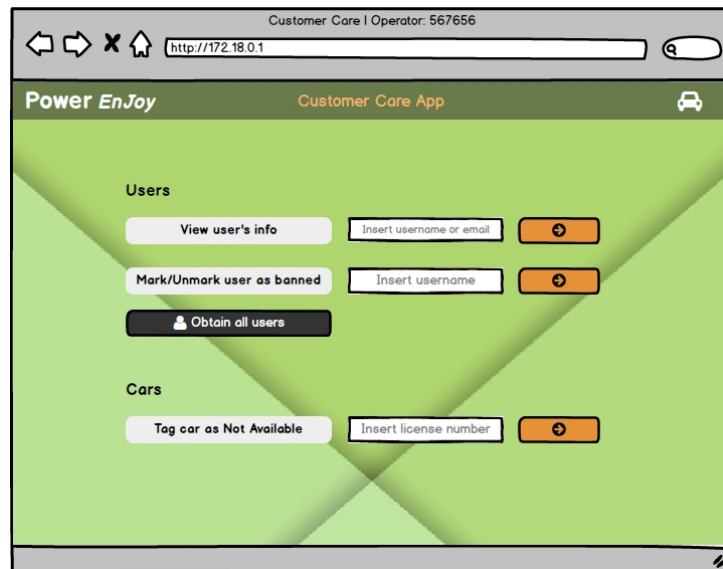


Figure 24: Validation service home page mockup

### 3.2.2 List of Reports and Violations

From the home page the operator could access the list of all the not valid reports and valid violations.

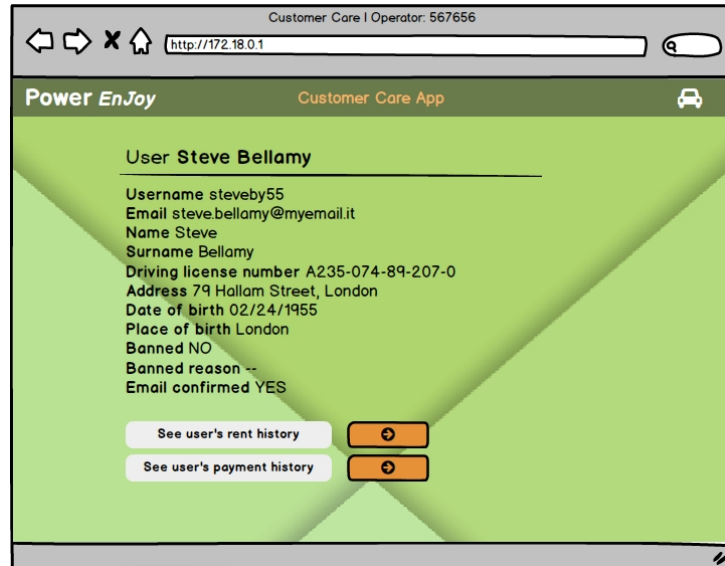


Figure 25: Validation service reports and violations list mockup

## 4 Requirements traceability

### 4.1 Functional requirements

In the [Table 1](#) is presented a mapping correspondence between the requirements defined in the RASD related to each goal and the components identified in the server component diagram.

Requirements of goal	Components
<b>G1</b> Allow guest users to register to the system	UserAppServer AccessHandler DataProvider
<b>G2</b> Allow registered users to authenticate to the system	UserAppServer AccessHandler DataProvider
<b>G3</b> Allow users to transfer data to the system describing occurred violations, including the suitable metadata to describe the submitted violation	UserAppServer SubmissionHandler DataProvider
<b>G4</b> Ensure that the chain of custody of the information provided by the users is never broken, and the information is never altered or manipulated	UserAppServer SubmissionHandler DataProvider APIHandler
<b>G5</b> Allow the system to retrieve data about the accidents that occur on the territory and data about issued tickets via the municipality provided service	APIHandler DataProvider
<b>G6</b> Allow the system to cross the information submitted by the users and the information retrieved from the municipality to build and provide statistics	StatisticsHandler DataProvider APIHandlers
<b>G7</b> Allow users to consult a map highlighting the streets (and the areas) with the highest frequency of violations, the identified potentially unsafe areas and view statistics about previously stored violations	UserAppServer MapHandler DataProvider StatisticsHandler
<b>G8</b> Allow municipality to consult the system data and receive suggestions on possible interventions via a restrict access API	APIHandler DataProvider
<b>G9</b> Provide validation service the ability to validate user's submissions of data describing occurred violations	ValidationAppServer ValidationHandler DataProvider

Table 1: Mapping goals on components

## 4.2 Non functional requirements

**Security** Security protocols are used for transmission and storage of sensitive data. Validation Service Server is accessed over a VPN to ensure security.

**Performance requirements** To guarantee a short response time we have tried to decouple components in order to enable an instance pooling management of components by the EJB container and so an as much as possible concurrent management of requests. During all the design process we also have kept in mind the scalability of the software.

**Availability** To ensure availability requirements server will be running 24 hours for day. The architecture is designed with the purpose of enabling a redundancy architecture if availability constraints would make it necessary.

**Portability** Users access the system through a web-based application that enables the portability and a cross-operative system compatibility.

## 5 Implementation, integration and test plan

We now want to present how we will implement our system by explaining the strategy we will follow for the Server and how the features we want to offer will be implemented and integrated.

### 5.1 Server

The Server will be implemented following a bottom-up strategy since it will be built on various modules that will cooperate in order to ensure that the goals and standards stated in the *RASD* [3] will be met.

The Server relies on the GIS and the Municipality API, which will be considered reliable and accurate services and will be tested only "server side" (i.d. checking that our system can exploit them properly).

For what it concerns the the Server, each submodule will be implemented and tested with formal methods before being integrated with the other modules that rely on it, since integrating a malfunctioning module with other can only lead to bigger problems and the effort and time needed to fix them could increase exponentially.

To better understand the decisions we made about implementation, testing and integration here are two tables that list the features we want to offer linked with the relevance we gave them considering the difficulty of the implementation and the importance for the user.

### 5.2 UserApplication features

Feature	Importance	Difficulty of implementation
Sign up and login	Low	Low
Consult personal data	Low	Low
Upload a picture	High	Medium
Consult the map	Medium	High
See statistics	Medium	High

Table 2: Users features

- **Sign up and login:** sign up and login are features that are fundamental to identify users and allow them to properly upload reports. The modules that will support the login phase will be *AccessHandler*, that will be implemented right before the *UserInformationHandler* since their functionalities are linked. Moreover they will be tested following the "relies on" relationship. They both rely on *DataProvider* module, so their testing procedure will be subjected to the one of the *DataProvider* and the same stands for the integration procedure
- **Consult personal data:** the module *UserInformationHandler* is the one responsible of making this feature available. It will be integrated with the

*DataProvider*, and will be implemented after the *AccessHandler* since a user needs to sign up to the system before accessing his information

- **Upload a picture:** this feature is the core of the whole system, and several modules are involved in its realization. The *SubmissionHandler* is responsible of coordinating all the operations and method calls necessary to perform the action. It will call the *DataProvider* and will interact with the *GIS*, for these reasons it will be integrated with them.
- **Consult the map:** this feature will concerne the *DataProvider*, the *MapHandler* and the *GIS API*. The first one will be responsible of retrieving the proper information from the database, while the *MapHandler* will format the data sent from the *userAppServer* in order to forward it to the *GIS API* to allow it to offer the rendered map
- **See statistics:** the *StatisticsHandler* will trigger the *DataProvider* to retrieve updated data from the *Municipality API* and the *DBMS* with the objective of updating all the possible statistics that the system will offer to the user and the Municipality

### 5.3 Municipality features

Feature	Importance	Difficulty of implementation
Authenticate	Low	Low
Access the API	High	Low
Retrieve violations' data	High	Medium
Retrieve statistics	Medium	Medium
Retrieve tickets's data	High	High
Share data	Medium	Medium

Table 3: Municipality features

All these features will be made available through the *API*. Since it will be of fundamental importance for the system's interface with the Municipality it will have to be implemented on a strong and reliable backend (all the "logic" modules) and for this reason it will be implemented after the whole Server will be fully tested.

### 5.4 Integration

In this section we want to show how we want to integrate modules with one another. The tail of the arrow starts from the module that uses the one pointed by the head.

Even with the most rigorous testing procedure the integration can generate unpredictable side effects, so right after two modules are integrated they are tested again, and so on until the whole Server of the system will be fully implemented.

#### 5.4.1 Integration of the internal components of the Server

For better readability we separated the pictures of the integration of the *DataProvider* with the other modules of the backend.

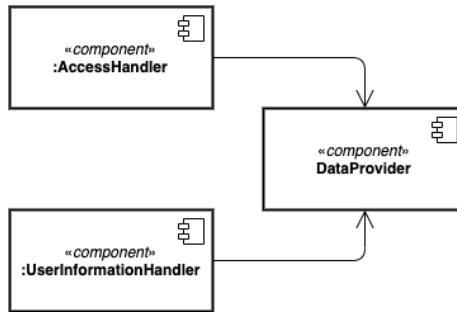


Figure 26: User data integration

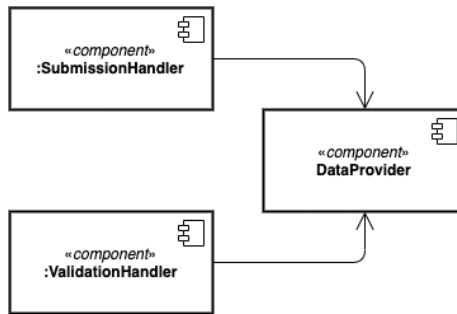


Figure 27: Submissions and violations data integration

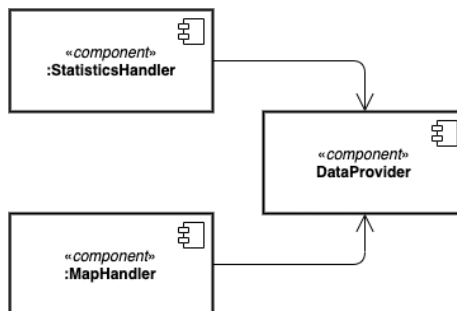


Figure 28: Statistics and map data integration

#### 5.4.2 Integration of the frontend with the backend

The *UserApplication* and the *CustomerCareApplication* are considered to be frontend modules since they are the connection with the external world. These






Figure 29: Municipality API data integration

modules will be the last to be integrated because, as already stated, we want to be sure to expose well implemented interfaces before doing so.




Figure 30: User app integration




Figure 31: Validation Service integration

### 5.4.3 Integration with the external services

The *GIS* and the *Municipality* are the external services with which our sistem interfaces, and will be integrated at different stages of implementation. The *GIS* will be integrated with the *:MapHandler* component since the latter relies on it, while the *Municipality API* will be integrated as soon as the backend will be properly implemented.

# Appendices

## A Software and tools used

For the development of this document we used

- $\text{\LaTeX}$  as document preparation system
- [GitHub](#) as version control system
- [Draw.io](#) for graphs
- Balsamiq Mockups for user interface mockups

## B Hours of work

This is the amount of time spent to redact this document:

- Mattia Calabrese:  $\sim 0$  hours
- Federico Capaccio:  $\sim 390204$  hours
- Amedeo Cavallo:  $\sim 0$  hours

## C Changelog

- **v1.0** December 9, 2019

## References

- [1] Bass, Clements, Kazman, *Software Architecture in Practice*, SEI Series in Software Engineering, Addison-Wesley, 2003
- [2] E. Di Nitto, M. Rossi, *Software Engineering 2 Assignment*, AA 2019-2020
- [3] M. Calabrese, F. Capaccio, A. Cavallo, *SafeStreets: Requirements Analysis and Specification Document*, Politecnico di Milano - Software Engineering II Project, 2019