
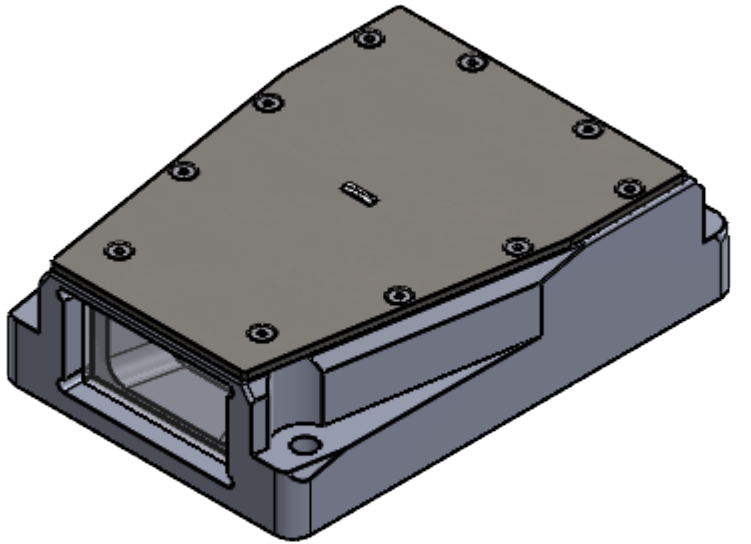
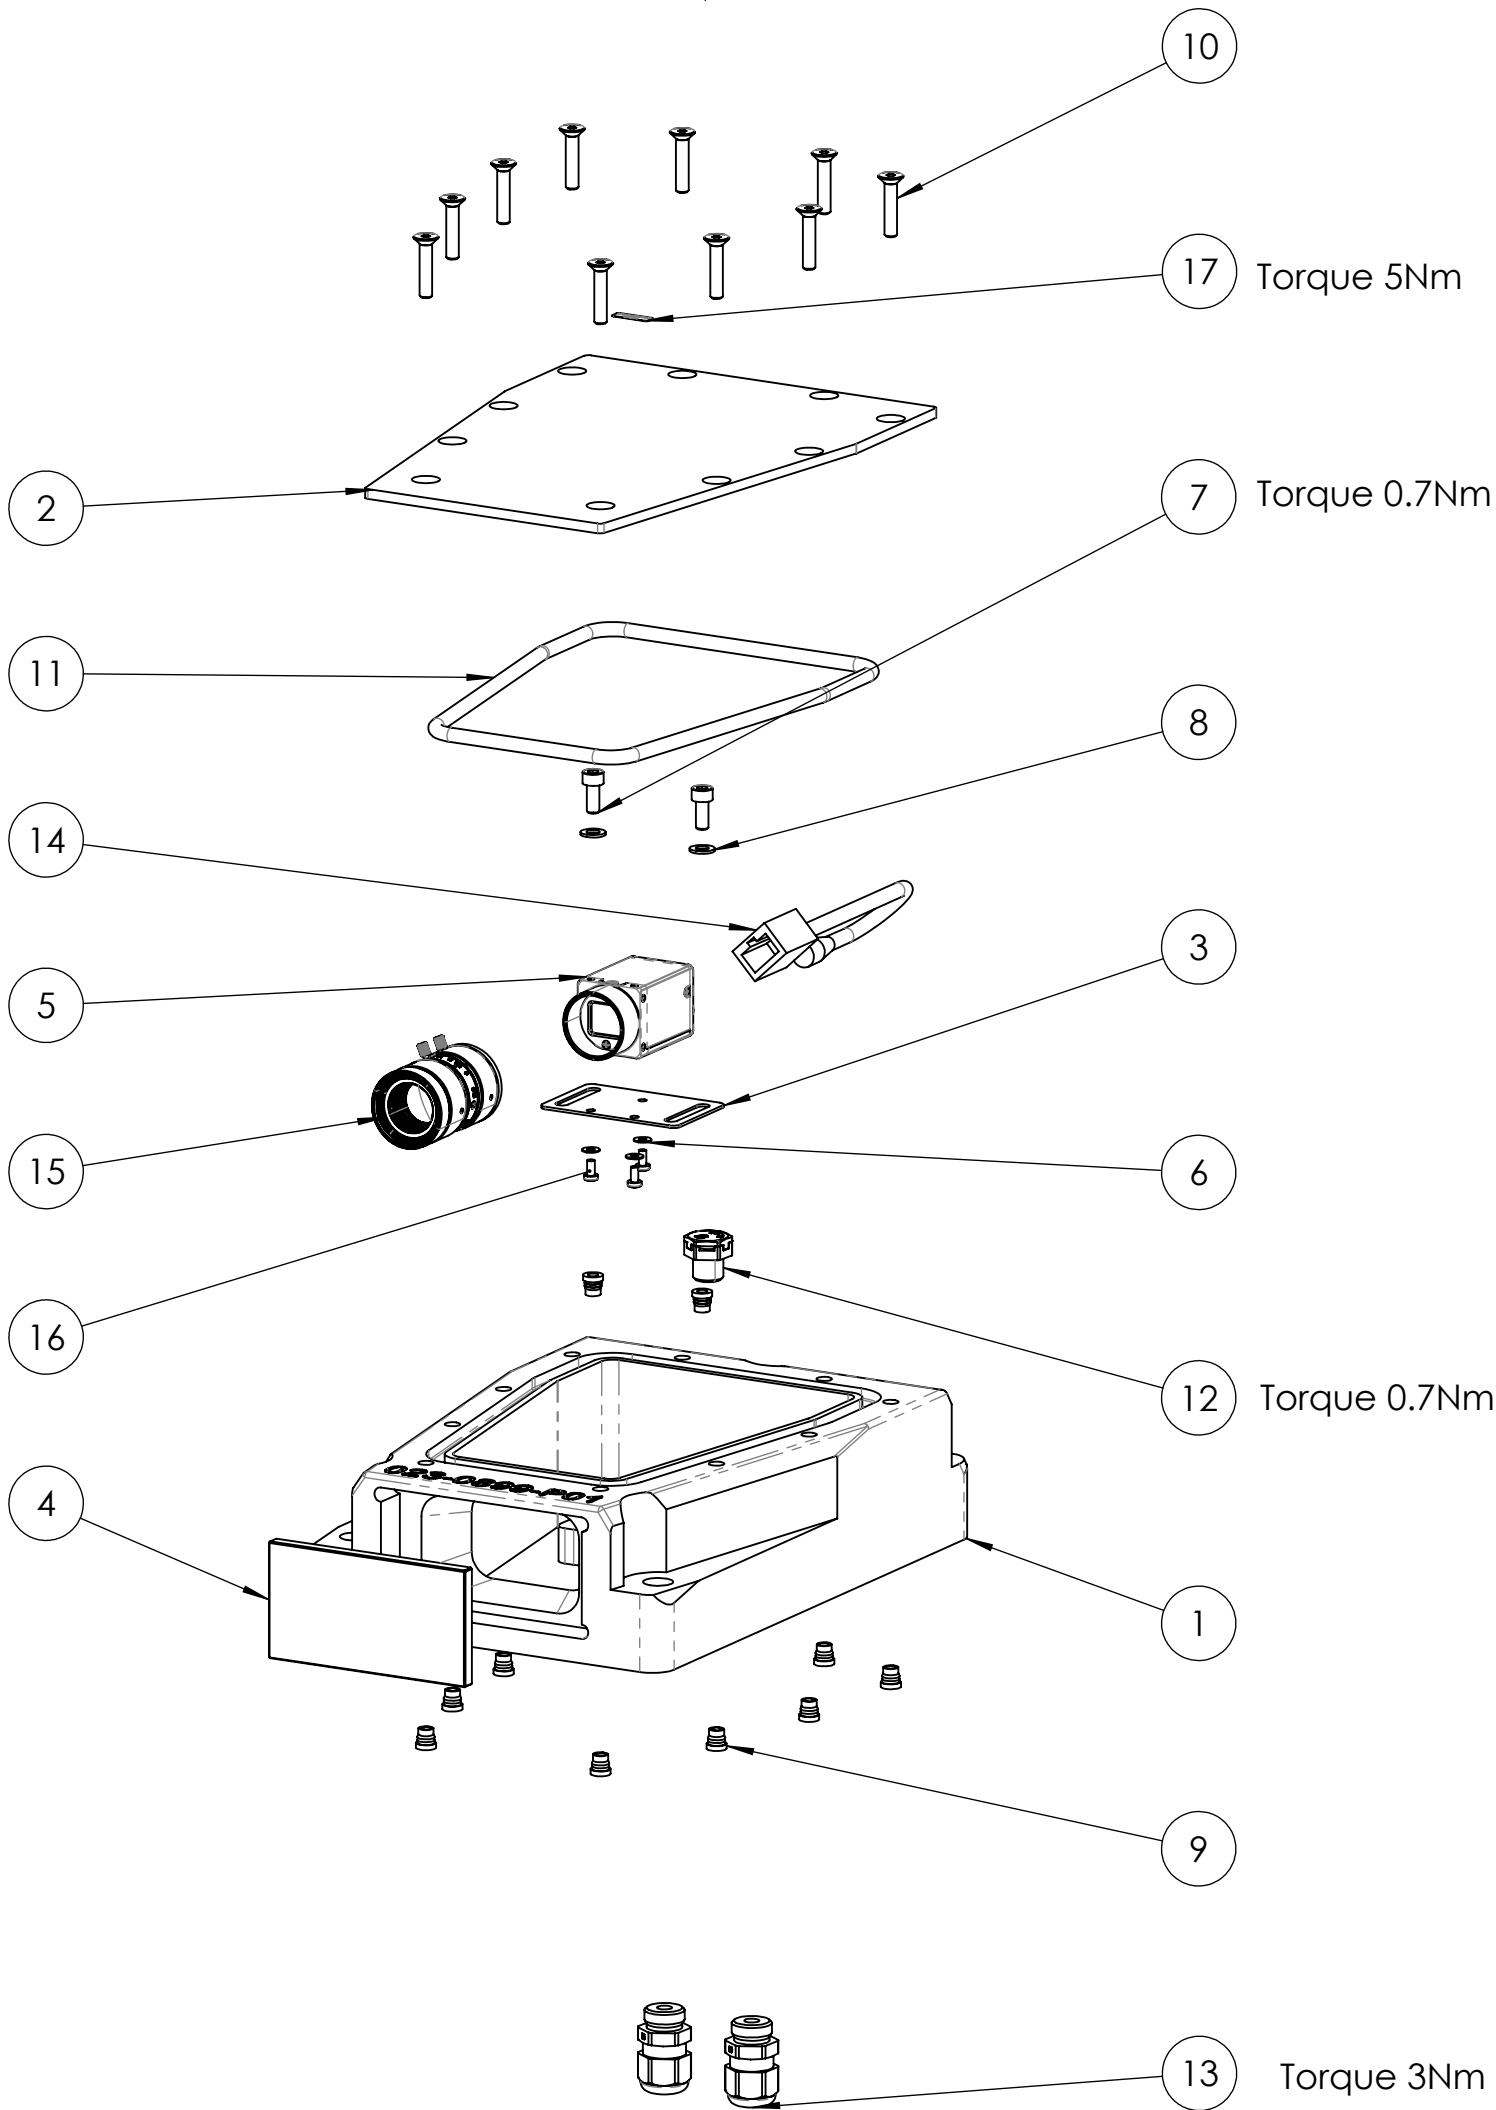
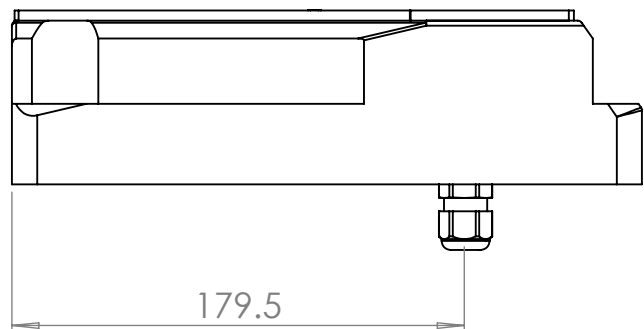
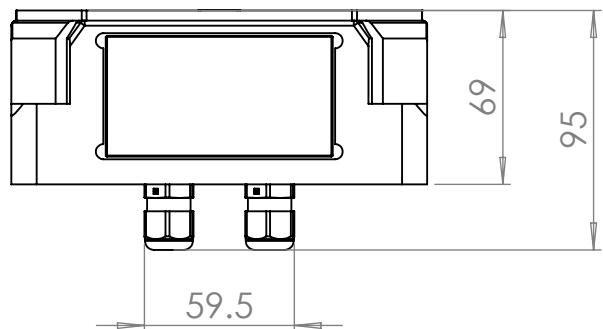
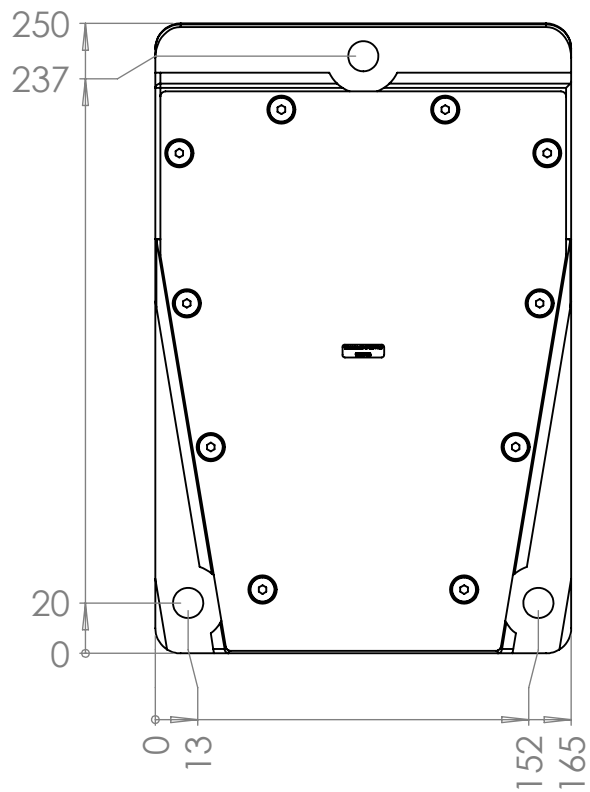


THIS DRAWING IS THE PROPERTY OF WHEELRIGHT LTD. IT MUST NOT BE REPRODUCED OR DISTRIBUTED WITHOUT WRITTEN PERMISSION FROM WHEELRIGHT LTD. COPIES OF DRAWINGS HELD BY SUPPLIERS FOR THE PURPOSE OF QUOTATION AND/OR MANUFACTURE ARE TO BE SHREDDED OR, BY REQUEST RETURNED TO WHEELRIGHT LTD.

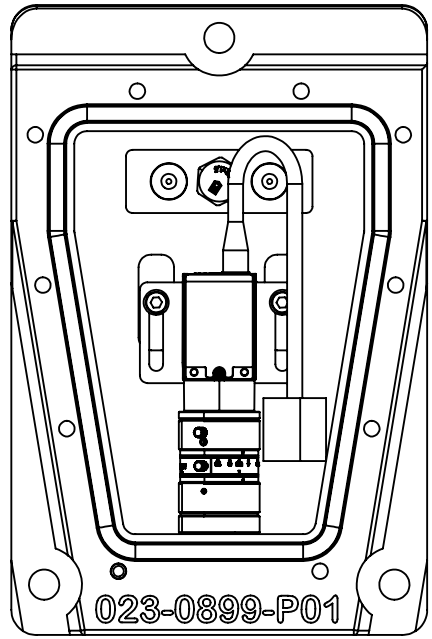

Assembly Notes

All fasteners Stainless Steel A2 unless otherwise stated.

Heat set threaded inserts, ensuring good vertical alignment.

Seal gland base and breather vent threads with Loctite MR 5438 or SI 5331

Degrease window location before applying a thin bead of Sikaflex EBT+ All-Weather all around edge of glass and pressing into place. Ensure continuous contact seal all around glass edge. Backfill surrounding gap to flush with glass surface. Set with glass horizontal to cure

'O' Ring is installed dry as this is a static seal.

Sticker with WR specified Asset number applied to top surface of lid in prominent location. Printed in chemically resistant ink on durable backing with chemically resistant adhesive, eg Link Hamson Gloss White Polyester stickers.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	023-0899-P01 Tread Camera Housing Case	Tread camera housing case	1
2	023-0663-P02 Camera Housing Lid	Tread camera housing lid	1
3	023-0899-P02 Camera Bracket		1
4	023-0899-P03 Camera Window	Tread camera housing window	1
5	PTN1793 Camera Body - HikRobot MV-CS050-10GM-PRO		1
6	Washer, M3, Form A, SSA2	M3 Form A Stainless	3
7	PTN0987 M5 x 12 Socket Cap Screw		2
8	PTN0454 M5 Washer	M5 WASHER, 5.3ID X 10OD X 1 WIDE, A2 SS	2
9	PTN0699 M5 x 0.8 Brass Insert	Tappex/KVT 073M5	12
10	PTN0985 M5 x 25 Socket Countersunk Screw		10
11	PTN0984 O-Ring 169.3 x 5.7mm Viton Rubber		1
12	PTN1903 Venting Plug, Plastic, M12	Hylec JDAE12PA/SW	1
13	PTN0044 M16 x 1.5 Cable Gland	Lapp 53111110	2
14	023-0479 Power and Trigger Cable Adaptor	Power and Trigger Adaptor Cable	1
15	PTN1451 Lens, 35mm, C mount	HikRobot MVL-MF3528M-8MP	1
16	M3 x 0.5 x 6 POZI BUTTON HEAD SCREW, SS A2	M3 x 0.5 x 6 Socket Button Head Screw, SS A2	3
17	PTN1663 Asset Label	Asset Number allocated by WheelRight, as specified on PO	1

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN SURFACE FINISH: Ra 1.6 (N7) TOLERANCES: LINEAR: ± 0.10 (0.00) 0.25 (0.0) ANGULAR: ± 0.5		FINISH: DEBUR AND BREAK SHARP EDGES Clean		DO NOT SCALE DRAWING THIRD ANGLE PROJECTION	
NAME		DATE		ISSUE	
DRAWN		PNR		26/04/2025	
CHK'D				A Initial Release, PNR	
APP'VD				B Asset label added, PNR	
MFG				C Thread sealant corrected, PNR	
Q.A				D Tread Camera Housing updated to Rev.8, JDW	
				MATERIAL:	
				Various	
				WEIGHT: GRAMS	

01865 854848

Tread Camera Unit
Assembly
023-0899

SCALE: 1:3 @ A2 SHEET 1 OF 1