

NOTES: Released

1. TOLERANCES:
-
-
-

2. PARATA PART NUMBER, REV, AND DATE CODE TO APPEAR ON LABEL. DATE CODE MUST BE IN A PLANT-WEEK-YEAR FORMAT, SPECIFICALLY PP-WW-YY. OTHER APPROVED METHOD MAY BE USED. APPLY LABEL IN APPROXIMATE LOCATION SHOWN.

3. DRAWING TO COMPLY WITH 103-1602 WI,CREATING A CABLE ASSY DRAWING.

4. SYMBOL USAGE: S = STRIP WIRE

5. MUST COMPLY WITH ROHS DIRECTIVE 2002/95/EC.

6. BURN RATE TO MEET OR EXCEED UL 94 V-2.

7. SUPPLIER LOT NUMBER (I.E. DATE CODE MUST BE SPECIFIED ON THE PACKING CONTAINER FOR EACH SHIPMENT.

8. REFERENCE THE QUALITY ASSURANCE REQUIREMENTS DOCUMENT 102-1133 FOR ADDITIONAL INFORMATION TO INCLUDE CRITICAL INSPECTION DIMENSION CRITERIA.

9. CABLES MUST COMPLY WITH IPC-A-620 WORKMANSHIP STANDARD.

10. STRIP INDICATED WIRES IN ACCORDANCE TO TERMINAL MANUFACTURER'S SPECIFICATIONS.



11. ITEM 2, CABLE, 10 CONDUCTOR, TO BE SPLIT TO 2X (4) CONDUCTORS EACH. BUILD SUBASSY USING EITHER HALF OF CABLE, WIRING COLORS AS SHOWN - DETAIL A1/B1 OR DETAIL A2 / B2.

12. PLACE WIRE THRU HOLES AS INDICATED AND SOLDER IN PLACE. TRIM SOLDER JOINT ON BACK SIDE OF BOARD AS FLUSH AS POSSIBLE.

13. REFER TO DOCUMENT #114-0319 FOR TEST PROCEDURES FOR SYSTEM INDICATOR LIGHTS. TEST PROCEDURE TO BE INCLUDED WITH DRAWING FOR PART QUOTE.

14. APPLY CLEAR SILICONE LUBRICANT EQUIVILENT TO MIL-46106B TYPE 1 GROUP 1

REVISION					
ECO	REV.	DESCRIPTION	DATE	DRAWN	CHECKED
ECO-09842	02	ADDED: MAX 2.0 TO ALL PART DESCRIPTIONS	7/9/2019	JDB	MRF
ECO-09938	03	ADDED CABLE IN MODEL FOR ASSY VIEWS	8/8/2019	JDB	MRF
ECO-10143	04	ADDED TEST PROCEDURE	9/25/2019	JDB	MRF
ECO-13575	05	321-0037C WAS 321-0037B	8/23/2023	MLG	MRF
ECO-16705	06	ADDITION OF FLAG NOTE 14	09/25/2025	MLM	EXB

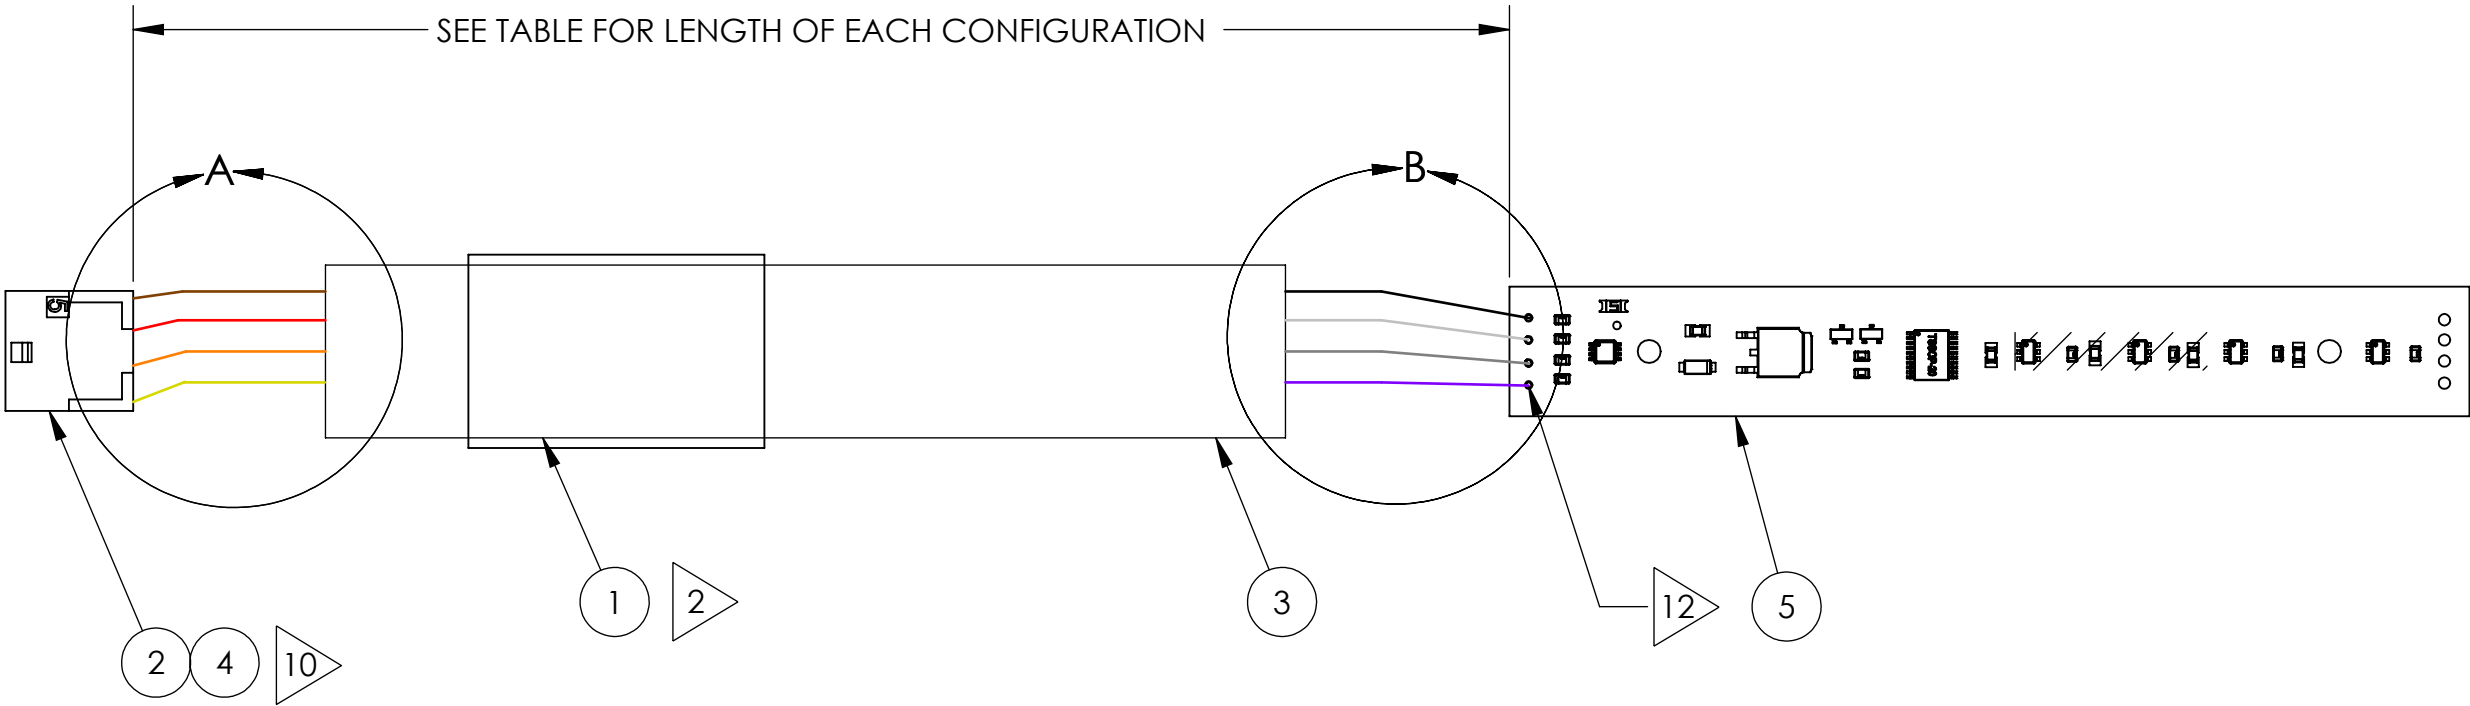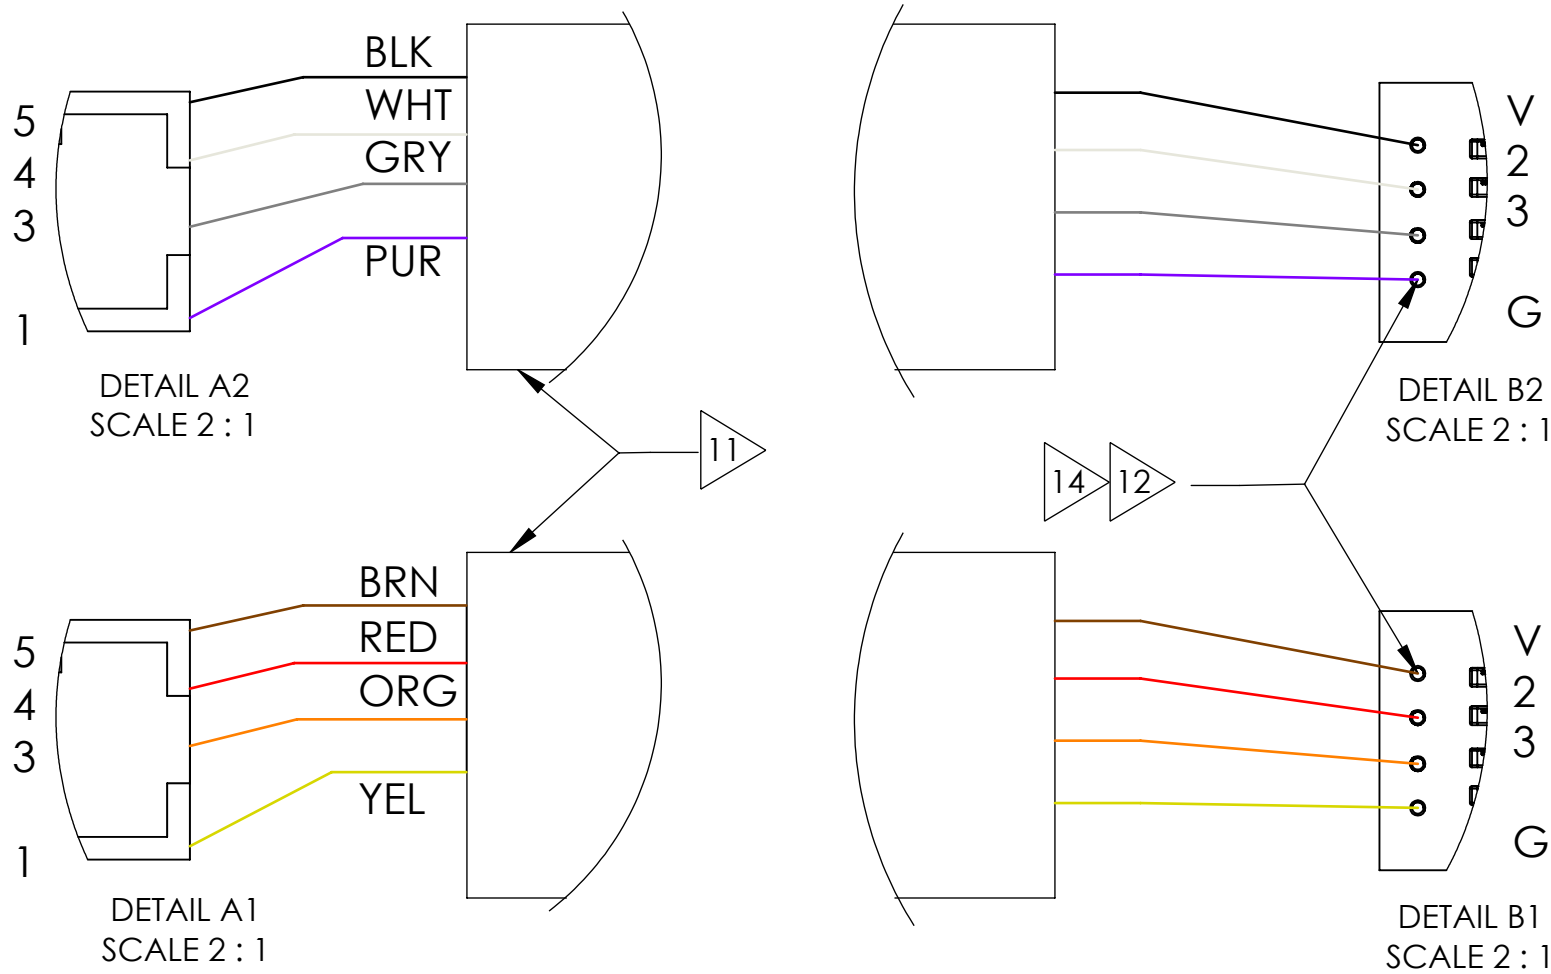

PCBA MAX 2.0 DOOR INDICATOR LIGHTS CONFIGURATIONS			
PART NUMBER (CONFIGURATION)	DESCRIPTION	LENGTH (306-0059)	NOTES
301-0679-01	SUBASSY, PCBA, MAX 2.0, DOOR INDICATOR LIGHTS, VIAL FEEDER	16.0"	
301-0679-02	SUBASSY, PCBA, MAX 2.0, DOOR INDICATOR LIGHTS, CAPPER	14.0"	
301-0679-03	SUBASSY, PCBA, MAX 2.0, DOOR INDICATOR LIGHTS, OVERFLOW BIN	24.0"	
301-0679-04	SUBASSY, PCBA, MAX 2.0, DOOR INDICATOR LIGHTS, PRINTER/LABELER	9.0"	

ITEM NO.	301-0679-01/QTY.	301-0679-02/QTY.	301-0679-03/QTY.	301-0679-04/QTY.	PARATA NO.	DESCRIPTION
1	1	1	1	1	005-1220	LABEL, GENERIC, 1.00 X 2.25 SELF-LAMINATING VINYL
2	4	4	4	4	306-0012	CONN, TERMINAL, M, 26-30 AWG, GOLD, MICRO-FIT, RoHS
3	16.0	14.0	24.0	9.0	306-0059	CABLE,10 COND,26AWG,FLAT ROHS
4	1	1	1	1	306-0523	CONN, PLUG, 5, 3MM, MICRO-FIT, ROHS
5	1	1	1	1	321-0037C	PCBA, MAX_2_0, LED STATUS INDICATION, DOORS

REFERENCE DIMENSION (XXX.XX)	TOLERANCES UNLESS OTHERWISE NOTED. METRIC: X = ± 2 MM X.X = ± 0.5 MM X.XX = ± 0.15 MM ENGLISH: X.X = ±.1 INCH X.XX = ±.02 INCH X.XXX= ±.005 INCH ANGULAR: MACH. 1° BEND 2°	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PARATA SYSTEMS, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PARATA SYSTEMS, LLC IS PROHIBITED.	NAME MIP DATE 5/3/19 DRAWN JDB 5/3/19 CHECKED MRF 5/3/19 ENG MGR. MRF 5/3/19 SCALE:1:1 SHEET 1 OF 1 MATERIAL -- SEE BOM FINISH -- ◁▷
------------------------------	--	--	--

DESCRIPTION
SUBASSY, PCBA, MAX 2.0, DOOR INDICATOR LIGHTS
SIZE **C** PART NO. **301-0679-00** REV. **06**

DIMENSIONS ARE IN: INCHES UNLESS OTHERWISE NOTED.
DO NOT SCALE