


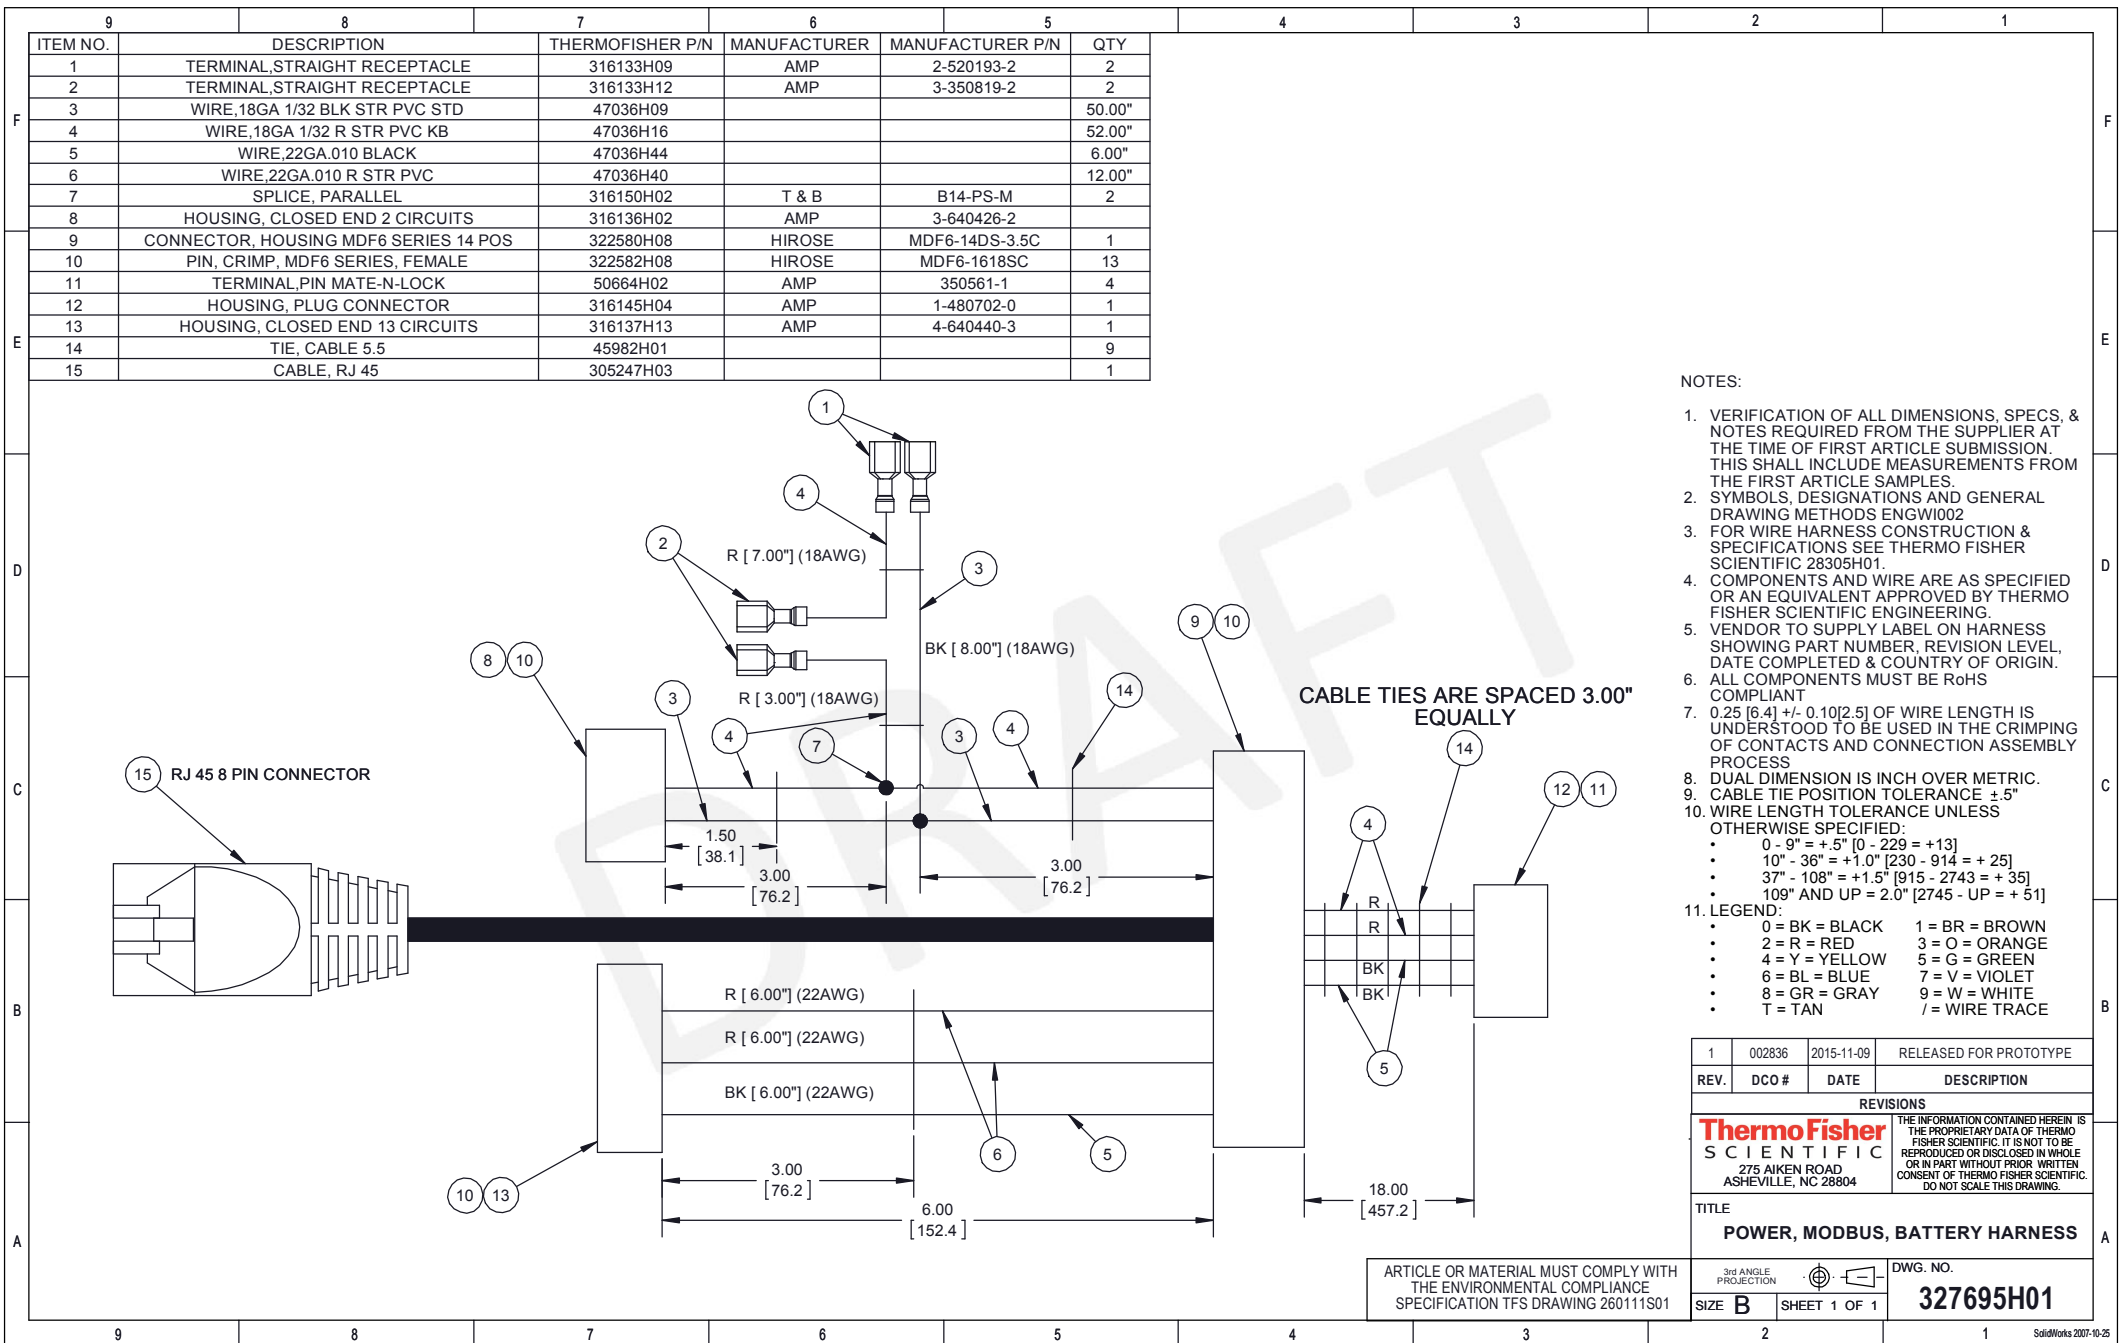

NOTES:

1. VERIFICATION OF ALL DIMENSIONS, SPECS. & NOTES REQUIRED FROM THE SUPPLIER AT THE TIME OF FIRST ARTICLE SUBMISSION. THIS SHALL INCLUDE MEASUREMENTS FROM THE FIRST ARTICLE SAMPLES.
2. SYMBOLS, DESIGNATIONS AND GENERAL DRAWING METHODS ENGWI002
3. FOR WIRE HARNESS CONSTRUCTION & SPECIFICATIONS SEE THERMO FISHER SCIENTIFIC 28305H01.
4. COMPONENTS AND WIRE ARE AS SPECIFIED OR AN EQUIVALENT APPROVED BY THERMO FISHER SCIENTIFIC ENGINEERING.
5. VENDOR TO SUPPLY LABEL ON HARNESS SHOWING PART NUMBER, REVISION LEVEL, DATE COMPLETED & COUNTRY OF ORIGIN.
6. ALL COMPONENTS MUST BE RoHS COMPLIANT
7. 0.25 [6.4] +/- 0.10[2.5] OF WIRE LENGTH IS UNDERSTOOD TO BE USED IN THE CRIMPING OF CONTACTS AND CONNECTION ASSEMBLY PROCESS
8. DUAL DIMENSION IS INCH OVER METRIC.
9. CABLE TIE POSITION TOLERANCE $\pm 5"$
10. WIRE LENGTH TOLERANCE UNLESS OTHERWISE SPECIFIED:
 - 0 - 9" = +5" [0 - 229 = +13]
 - 10" - 36" = +1.0" [230 - 914 = + 25]
 - 37" - 108" = +1.5" [915 - 2743 = + 35]
 - 109" AND UP = 2.0" [2745 - UP = + 51]
11. LEGEND:
 - 0 = BK = BLACK
 - 1 = BR = BROWN
 - 2 = R = RED
 - 3 = O = ORANGE
 - 4 = Y = YELLOW
 - 5 = G = GREEN
 - 6 = BL = BLUE
 - 7 = V = VIOLET
 - 8 = GR = GRAY
 - 9 = W = WHITE
 - T = TAN
 - / = WIRE TRACE

1	002836	2015-11-09	RELEASED FOR PROTOTYPE
REV.	DCO #	DATE	DESCRIPTION
REVISIONS			
ThermoFisher SCIENTIFIC		THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY DATA OF THERMO FISHER SCIENTIFIC. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN CONSENT OF THERMO FISHER SCIENTIFIC. DO NOT SCALE THIS DRAWING.	
275 AIKEN ROAD ASHEVILLE, NC 28804			
TITLE			
POWER, MODBUS, BATTERY HARNESS			
3rd ANGLE PROJECTION		 DWG. NO.	
SIZE B		327695H01	
SHEET 1 OF 1			

ARTICLE OR MATERIAL MUST COMPLY WITH THE ENVIRONMENTAL COMPLIANCE SPECIFICATION TFS DRAWING 260111S01