



PDR Connectivity Solutions Catalogue

**Empowering Networks with
Superior Connectivity**

www.pdrworld.com



About Us

PDR, founded in 1974, is a global player in manufacturing and supply of active and passive fiber optic devices. Our dedication to quality and innovation has made us a trusted partner in the telecommunications, defense, data center, fttx, smart cities, metro, cctv, etc industries. With a focus on cutting-edge technology and customer satisfaction, we continuously strive to meet and exceed industry standards.

Why Choose PDR



Over 40 Years In The Fiber Optics Industry



High Standards And Reliable Products



Continuous R&D And Innovative Technologies



Exceptional support and services

Few of our Esteemed Clients

**Leading Telecom Providers / Top Defense Contractors
Major Data Centers Worldwide**





Table of Contents

Fiber Cables & Patch Cords	04-08
Passive Components	09-14
Cable Management	15-21
Active Devices	22-24
Network Protection & Monitoring	25-27
Test & Measurement	28-31
Tools	32-33
Certification	34

MPO/MTP Patch Cord

Description

MPO/MTP Patch Cord is a multi-core fiber optic cable pre-terminated with MPO/MTP connectors at both ends. It is ideal for fiber distribution in data centers, where space-saving and reduced cable management are needed.

PDR provides a full range of MPO/MTP patch cords and top-tier customized services for cable type, transmission mode, connector type and polarity.

Features

- » IEC 61754-7 compliant.
- » EIA/TIA-604-5 compliant.
- » High precision guide pins for exact alignment.
- » Compact design, up to 4/8/12/16/24/32/48/72 Fibers.

Parameters

Items	MPO/MTP	LC/SC/ST/FC
End Face Type	PC and APC	UPC and APC
Fiber Type	SM (G652/G655/G657) MM (OM1-OM5)	
Core Number	4/8/12/16/24/32/48/72	
Cable Diameter	Mini Round Cable: Max 5.0mm Ribbon Cable: Max 2.5*5.0mm	0.6/0.9/ 2.0/3.0 mm
Insertion Loss(dB)	Standard ≤0.35/0.7 (Typical/Max) Low Loss ≤0.2/0.35 (Typical/Max)	≤0.3
Return loss (Min)	APC SM ≥60dB PC MM ≥20dB	APC SM ≥65dB UPC SM ≥55dB UPC MM ≥25dB
Outer Sheath Material	PVC/LSZH	



4F MPO/MTP APC - MPO APC SM



6 X 24F MTP-MTP 144 Fiber Duralino Trunk Cable 1



8F MPO/MTP-LC OM3



12F MPO/MTP APC - LCAPC SM



12F MPO/MTP-LC SM



12F MPO/MTP-LC OM3 OM4 Breakout



16F MPO-MPO OM3



24F1X 24F-3 X 8F OM4



24F 2 X 12F-2X12F MPO OM3



24F Elite 1 X 24F MPO-3 X 8F MPO SM



24F MPO-2 X 12F MPO OM3



24F MPO/MTP APC - SCAPCSM

Fiber Cables & Patch Cords



24F MPO/MTP-LC OM3



96-192F MPO/MTP Breakout SM Patch Cord



144-576F MPO/MTP Breakout OM3 OM4 Patch Cord



144F 6 X 24F MPO-6X24 MPO OM3



Elite 8F MPO-MPO APC Bending Boot



MTP/MPO 10G 25G 12 Fibre Singlemode Trunk

MPO/MTP Loopback

Description

A built-in multi-core MPO/MTP loopback patch cord fixes both ends of the optical fiber into an MPO/MTP connector. It transmits the optical network signal from the transmitter to the receiver to create an optical loop within the same connector, making it ideal for troubleshooting and optical equipment self-testing.

Features

- » Optional: 4/8/12/16/24-core & fiber array.
- » Standard loss, low loss optional.
- » Reliable PIN positing testing for Male/Female PIN.
- » Anti-press shell protects the optical fiber from being exposed or bent.

Parameters

Optical Parameters				
Insertion Loss(dB)	SM Standard	SM Elite	SM Standard	MM Elite
	≤1.2	≤0.5	≤1.2	≤0.5
Durability (dB)	≤0.2 (500 times mating)			
Geometry Parameters				
Items	X-axis		Y-axis	
	Min	Max	Min	Max
Radius of Curvature (mm)	500	-	500	-
Polishing Angle	0-0.2	0+0.2	8-0.2	8+0.2



Yellow SM Elite



Beige MM



Aqua OM3



Green SM

Fiber Optic Cable Assemblies

Description

Our range of fiber optic patchcords offers superior connectivity solutions designed to meet the diverse needs of modern data centers and networking environments. These patchcords ensure reliable and efficient data transmission, catering to various applications with precision and durability.

Features

- » Low insertion loss and high return loss for optimal signal quality.
- » IEC, EIA/TIA and GR-326-CORE compliant & CACT approved Available in simplex, duplex, and various specialized designs including 90-degree bendable, fanout, and shortboot configurations.
- » All Patchcords are ROHS compliant.
- » Multiple connector types and lengths to suit specific requirements.

Parameters


Optical Parameters	Single-Mode	Multi-Mode
Diameter (mm)	0.9, 2.0, 3.0 or customised	
Fiber Cable	Simplex, Duplex or Customised	
Fiber Type	OS2, G657A1, G657A2	OM1, OM2, OM3, OM4
Insertion Loss(dB)	≤0.3 (PC)	≤0.3 (PC)
Return Loss (dB)	≥55 (UPC) ≥65 (APC)	≥35 (PC)
Exchangeability	≤0.2 dB	
Repeatability	≤0.2 dB	
Operating Temp.	-20 °C to +75 °C	
Storage Temp.	-40 °C to +85 °C	



Fiber Optic Cable Assemblies



Uniboot Patchcord

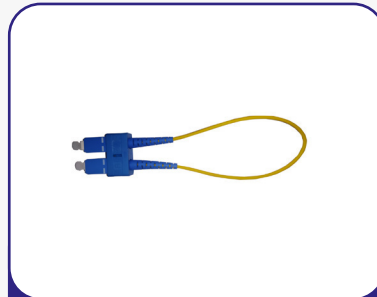

Loop Back Patchcord



90° Bendable Boot Patchcord

Fan Out Patch Cord

Description

A fan-out (breakout) patch cord that splits a multi-fibre trunk into individually terminated, ruggedised legs for direct connection to equipment. Each 250 μm fibre is reinforced into a 2.0 mm or 3.0 mm sub-jacketed leg with its own connector, so no separate breakout kit or termination box is required. Offered in single-mode and multimode with a wide choice of fibre counts and connectors, it is ideal for high-density data-centre, MPO/MTP breakout and structured-cabling applications.

Features

- » Factory-terminated fan-out legs — no field breakout kit needed.
- » 2.0 mm / 3.0 mm reinforced legs for durable, direct equipment connection.
- » Single-mode (G.652D / G.657A) and multimode (OM3 / OM4 / OM5) options.
- » Connectors: LC, SC, FC, ST and MPO/MTP breakout; UPC and APC end faces.
- » Insertion loss ≤ 0.3 dB; return loss ≥ 50 dB (UPC) / ≥ 60 dB (APC).
- » Available in 4, 8, 12, 24-fibre and custom counts, colours and lengths.



Fan Out Patch Cord

Fiber Cables & Patch Cords


Smart Bullet Drop Cable Assembly

Description

Pre-connectorised simplex fibre drop cable for easy pull-through in narrow ducts and conduits. Features a Ø5.9 mm bullet-shaped SC/APC head with guide-wire hole for quick installation without special tools. Built with G.657B3 fibre and durable FRTPU jacket, delivering ≤ 0.3 dB insertion loss and ≥ 60 dB return loss. Ideal for FTTH/FTTx and last-mile use.

Features

- » Ø5.9 mm bullet-shaped SC/APC head with guide-wire hole for tool-free pulls
- » Works in free & occupied ducts; braided pull rope included
- » ≤ 0.3 dB insertion loss, ≥ 60 dB return loss (1260–1650 nm)
- » G.657B3 fibre with 3.0 mm UV-resistant FRTPU + aramid strength
- » ≥ 150 N pull strength; ≤ 0.1 dB change; 500+ mating cycles
- » Fully tested to GR-326 & IEC; -25°C to $+70^{\circ}\text{C}$ range

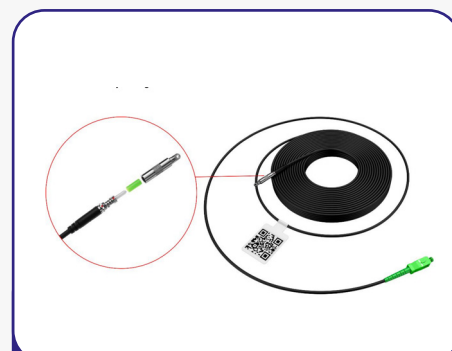

Smart Bullet Drop Cable Assembly

POF Patch Cord

Description

Plastic Optical Fibre (POF) patch cord with ~ 1 mm PMMA core for low-cost, short-distance links. Easy alignment and quick, tool-light termination. Operates at ~ 650 nm for visible signal checking. Flexible, lightweight, and resistant to vibration and EMI—ideal for industrial, automotive, and home use.

Features

- » Large-core PMMA fibre for easy handling
- » 650 nm visible light for quick checks
- » EMI-immune; safe for industrial use
- » Flexible, lightweight, bend-tolerant
- » Ideal for short-range industrial/home links
- » SC/LC/ST connectors; custom lengths



POF Patch Cord

Passive Components

Fiber Optic Adapter

Description

Joins two fiber connectors end-to-end for optical continuity across a bulkhead, patch panel or enclosure. A zirconia-ceramic or phosphor-bronze split sleeve aligns the ferrules for low insertion loss and high return loss.

Features

- All common standards: SC, LC, FC, ST, MU, E2000, MT-RJ.
- Zirconia-ceramic or phosphor-bronze alignment sleeve.
- $IL \leq 0.2 \text{ dB}$; $RL \geq 50 \text{ dB (UPC)}$ / $\geq 60 \text{ dB (APC)}$ single-mode.
- Simplex, duplex and quad; UPC and APC polish.
- Plastic or zinc-alloy housing; ≥ 1000 mating cycles.



Fiber Optic Adapter

SC/APC <-> SC/UPC Adapter Converter

Description

A compact hybrid fixed adapter that bridges SC/APC patch cords with SC/UPC equipment sockets without added attenuation. A precision ceramic ferrule ensures accurate alignment and minimal reflectance on single-mode 9/125 μm fiber, providing a plug-and-play solution for mixed APC/UPC infrastructure with no re-termination. Available in SC/APC-F to SC/UPC-M and SC/UPC-F to SC/APC-M configurations.

Features

- Bridges APC and UPC cabling with no re-termination.
- Zero added insertion loss (0 dB).
- Single-mode 9/125 μm ; ceramic (zirconia) ferrule.
- Colour-coded housing (blue UPC / green APC).
- ≥ 500 mating cycles; -40°C to $+75^\circ\text{C}$.
- Available in both polarity directions.



SC/APC ↔ SC/UPC
Adapter Converter

Passive Components

Variable Fiber Optic Attenuator

Description

A precision passive component that continuously controls and adjusts optical signal power. Available in SM and MM variants with a 0–30 dB range, ± 0.5 dB accuracy and excellent repeatability, with stable low-insertion-loss performance across 1260–1650 nm. SC, LC, FC and ST interfaces allow seamless integration for telecom, CATV, data centre and laboratory test environments.

Features

- » 0–30 dB continuous adjustment; ± 0.5 dB accuracy.
- » Insertion loss ≤ 1.0 dB; return loss ≥ 50 dB (SM).
- » SC, LC, FC, ST interfaces; SM and MM.
- » Broad 1260–1650 nm coverage; PDL ≤ 0.2 dB.
- » Repeatability $\leq \pm 0.2$ dB over ≥ 1000 cycles.
- » Compact, robust lab and field construction.



Variable Fiber Optic Attenuator (VOA)

CWDM Mux/DeMux Module

Description

Coarse wavelength division multiplexing/demultiplexing across the 1270–1610 nm CWDM grid in 4, 8 and 16-channel configurations. Four form factors – ABS compact module (two sizes), 1U rack equipment and LGX module – cover inline, rack and high-density panel installs. Low insertion loss, >30 dB adjacent-channel isolation and >45 dB return loss ensure signal integrity; compatible with Corning SMF-28.

Features

- » Four form factors: ABS module (2 sizes), 1U rack, LGX.
- » 4 / 8 / 16 channels across 1270–1610 nm (20 nm spacing).
- » Low IL: ≤ 1.6 dB (4ch) to ≤ 4.5 dB (16ch), ABS narrow PB.
- » Adjacent isolation >30 dB; non-adjacent >40 dB.
- » Return loss >45 dB; PDL < 0.30 dB; max input 500 mW.
- » SC/APC, SC/UPC, LC/UPC, LC/APC pigtail options.



CWDM Mux/DeMux Module

Passive Components

DWDM Mux/DeMux Module

Description

Dense wavelength division multiplexing/demultiplexing across ITU-T channels C20–C60 in the 1520–1570 nm window at 100 GHz minimum spacing. Available as a compact ABS module or 1U rack chassis in 4, 8 and 16-channel configurations. Low insertion loss, >30 dB adjacent-channel isolation and >45 dB return loss ensure reliable signal integrity; compatible with Corning SMF-28.

Features

- » Compact ABS module or 1U rack form factors.
- » 4 / 8 / 16 channels covering ITU-T C20–C60.
- » Low IL ≤ 2.0 dB (4ch) to ≤ 4.8 dB (16ch), ABS.
- » Isolation >30 dB adjacent / >40 dB non-adjacent.
- » 100 GHz minimum spacing; 1520–1570 nm.
- » Return loss >45 dB; FC/LC, APC/UPC pigtail options.



DWDM Mux/DeMux Module

PLC Splitter

Description

Planar Lightwave Circuit splitter providing passive optical power splitting using a precision planar waveguide chip. Available in 1×N (1×2 to 1×64) and 2×N (2×2 to 2×64) configurations across 1260–1650 nm, in bare fan-out, module, LGX cassette and rack-mountable formats. Tested to Telcordia GR-1209 and GR-1221 with low insertion loss, low PDL, high uniformity and -40°C to +85°C stability.

Features

- » Planar waveguide chip — low loss, high uniformity, long-term stability.
- » 1×N (1×2–1×64) and 2×N (2×2–2×64) configurations.
- » Wide 1260–1650 nm — covers all PON/WDM bands.
- » PDL ≤ 0.2 dB (1×2) to ≤ 0.4 dB (1×64).
- » Directivity ≥ 55 dB; return loss ≥ 55 dB (1×N) / ≥ 50 dB (2×N).
- » Bare fan-out, module, LGX cassette, rack formats.



PLC Splitter

Passive Components

Fiber Optic Connector, Field Installable

Description

A field-installable SC connector engineered for quick, reliable on-site termination without adhesives, polishing or power. A fully zirconia-ceramic ferrule (2.5 mm, $\leq 1 \mu\text{m}$ concentricity) delivers $\leq 0.3 \text{ dB}$ insertion loss and $\geq 45 \text{ dB}$ (PC) / $\geq 55 \text{ dB}$ (APC) return loss. Type-A suits 3.1×2 mm flat cable; Type-B suits flat, 3 mm drop, 2.0 mm and 0.9 mm cables. End-face geometry complies with Telcordia GR-326.

Features

- » Field installable — no adhesive, polishing or power.
- » Fully zirconia-ceramic ferrule; $\leq 1 \mu\text{m}$ concentricity.
- » Telcordia GR-326 compliant end-face geometry.
- » IL $\leq 0.3 \text{ dB}$; RL $\geq 45 \text{ dB}$ (PC) / $\geq 55 \text{ dB}$ (APC).
- » Re-assemblable design lowers defect rate.
- » SC/PC and SC/APC, Type-A and Type-B bodies.



Fiber Optic Connector, Field Installable (Fast Connector)

Bare Fiber Adapter

Description

Connects a stripped bare fiber directly to test equipment and instruments — one end clamps the bare fiber, the other presents a standard SC, LC, FC, ST or SMA interface. Enables fast, tool-free termination without splicing.

Features

- » SC, LC, FC, ST and SMA interfaces.
- » Mechanical clamp — no adhesive or tools.
- » Single-mode (OS1/OS2) and multimode (OM1-OM4).
- » Low insertion loss; ≥ 500 insertion cycles.
- » Ideal for FTTH/OTDR testing and emergency restoration.



Bare Fiber Adapter



Passive Components

HXB Connector Series

Description

Ruggedized, hermaphroditic fiber optic connectors using expanded-beam technology for harsh environments. Three shell sizes (HXB11 / HXB13 / HXB15) carry 2–6 optical channels in single-mode or multimode, with a hybrid optical/electrical option on the HXB15.

Features

- » Expanded-beam optics couple fibers without contact — tolerant of dust and debris.
- » Hermaphroditic design for fast field daisy-chaining.
- » Three shell sizes; 2–6 channels; SM and MM; hybrid power option on HXB15.
- » IP68 to 15 m immersion; 3,000 mating cycles; -40°C to $+85^{\circ}\text{C}$.
- » Intermateable with MIL-DTL-83526, Tyco Pro Beam, Stratos, QPC, Fibreco, Glenair.



HXB Connector Series

Fiber Spool

Description

Precision-wound single-mode fiber spool manufactured to meet and exceed ITU-T G.652D — the benchmark for long-haul, FTTH and high-bandwidth infrastructure. A Germania-doped silica core with pure-silica cladding and dual-layer UV-cured coating delivers ultra-low attenuation across 1310–1625 nm. Every reel is 100% optically tested and labelled with a unique ID, barcode, attenuation data and length for full traceability. (FPV and Kevlar spool variants also available.)

Features

- » ITU-T G.652D compliant; IEC 60793-2-50 / Telcordia GR-20.
- » Ultra-low attenuation $< 0.200 \text{ dB/km}$ at 1550 nm.
- » Wide operating window 1310–1625 nm.
- » Dual-layer UV-curable resin coating; cladding $125 \pm 0.7 \mu\text{m}$.
- » PMD (individual) $< 0.15 \text{ ps}/\sqrt{\text{km}}$; proof test $> 1\%$.
- » Reel lengths 2 / 3 / 5 / 10 km or custom; ISO 9001:2015, 100% tested.



Fiber Spool
(G.652D Single-Mode)


Cat6 / Cat6A Ultra Slim Patch Cord

Description

Elevate your data center infrastructure with the CAT6A S/UTP Ultra Slim Patch Cord, designed to deliver unparalleled performance and reliability. This ultra-slim 28AWG stranded patch cord, featuring a unique keyless locking pin for easy and secure connections, ensures maximum efficiency and minimal clutter in high-density networking environments.

Features

- » Supports up to 10Gbps (10GBASE-T) and tested up to 550MHz.
- » 50% smaller than standard 24 AWG patch cords, optimizing space.
- » 28AWG stranded oxygen-free copper conductors with PE insulation and PVC jacket.
- » 50µm 24kt hard gold-plated contact pins and UL 94V-2 polycarbonate connectors ensure long-term reliability.
- » Suitable for 100BASE-TX, 1000BASE-T, 2.5GBASE-T, 5GBASE-T, 10GBASE-T, and HDBaseT applications.
- » Supports PoE++ (802.3bt) 4PPoE, with a maximum PoE voltage of 57V DC and wattage of 100W DC.
- » ROHS compliant, and tested with FLUKE devices for channel+ POE and patch cord testing.

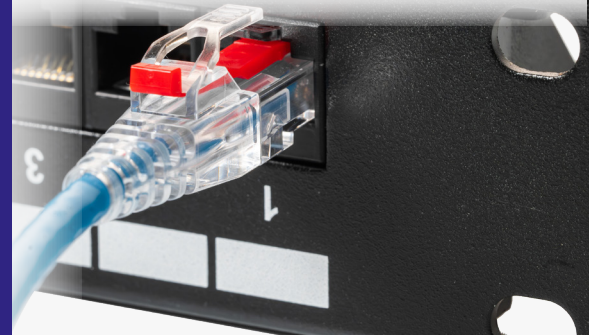

MPO Rack Patch Panel

Description

This solution is designed for connecting plug-and-play pre-terminated high-density MPO/MTP/UTP cabling systems. It is especially suitable for SAN, LAN, and data center applications. Each easy-plug MPO/MTP to LC cassette accommodates 12/24-fiber MPO/MTP based fiber assemblies and comes pre-loaded with LC adapters and fiber modes of your choice.

Features

- » Integrated and pull-out type available.
- » 12/24-Fiber cassette module adapter panel.
- » High density.
- » Snap fit modules.
- » Tool-free installation, Impact-resistant, corrosion-resistant, flame-retardant.

Parameters

Fiber type	SM (G652/6655/G657) MM (OM1-OM5)		
Connector	Male (with PIN), Female (without PIN)		LC.SC.ST.FC
	MPO/MTP		
Insertion loss (dB) (Typical/Max)	Standard ≤0.35/0.7	Low Loss ≤0.2/0.35	≤0.3
Return loss (Min)	APC SM ≥60dB PC MM ≥20dB		APC SM ≥65dB UPC SM ≥55dB UPC MM ≥25dB
Test wavelength (nm)	SM: 1310/1550		MM: 850/1300



PDR-HRS-1144A




PDR-HRS-1096M



PDR-HRM-04



PDR-HRM-04



PDR-HRF-1096A



PDR-HRM-03

Cable Management

Optical Fiber Distribution Frame

Description

Maximize your data center efficiency with our Optical Fiber Distribution Frame (ODF), designed to deliver high-density fiber management and seamless integration. Ideal for central offices, headends, FTTX, and data centers, this ODF supports up to 4752 LC or 3168 SC ports per frame, significantly saving space with increased port density.

Features

- » Supports up to 4752 LC or 3168 SC ports per frame, maximizing space efficiency.
- » Offers front or rear cable access options to suit various installation preferences.
- » Modular design allows one rack to serve multiple application spaces, ensuring versatility.
- » Provides increased patch cord routing space, accommodating standard 1.6 and 2.0 mm patch cords.
- » Efficiently integrates fiber splicing, storage, and cable connections in a single unit, enhancing cable management.

Parameters

Dimensions (H*W*D) mm		
2200*760*610		
Max Capacity (LC)		Max Capacity (SC)
4752		3168
Patch Panels with Regular Rail		
Model	SC	LC
1U	72	108
2U	144	216
3U	288	432



Mini Fiber Termination Box

Description

A wall-mountable steel termination box for the organised termination and protection of fiber optic cables. Fabricated from 20G CRCA steel with a seven-tank powder-coating process, it supports 12 fibers with SC adapters or 24 fibers with LC adapters. Internal sleeve holders and PVC routing rings ensure neat cable management, PVC cable glands provide strain relief, and embossed rear mounting holes allow quick installation. (Note: the earlier ABS “M-006, 4-port” entry has no datasheet on file and has been replaced by this current product.)

Features

- » Compact wall-mount enclosure — SC: Upto 12f, LC: Upto 24f capacity.
- » Accepts SC and LC optical adapters (adapter type optional).
- » 20G CRCA steel; seven-tank powder coating for corrosion resistance.
- » Siemens Gray Structural 7032 finish.
- » Integrated sleeve holder + PVC fiber routing rings.
- » PVC cable glands; embossed wall-mount holes with nylon bushings.



Mini Fiber Termination Box


Home Termination Box

Description

A compact, wall-mounted enclosure installed inside customer premises to provide a neat fiber termination point and house optical adapters, FICs and pigtails. It acts as the interface between in-building fiber cabling and the ONT patch cord, supporting termination, splicing and slack storage for CPE installations. Now available in 2-way and 4-way variants accepting standard SC and LC adapters, with routing guides that maintain the minimum bend radius.

Features

- » Available in 2-way and 4-way variants.
- » Compact, low-profile design; minimal wall space.
- » Inner slack storage maintains min. bend radius.
- » Tool-free install; inner tray for splice sleeves.
- » Loaded or unloaded configurations.
- » Durable ABS/PP; complies with IEC 61754-4.

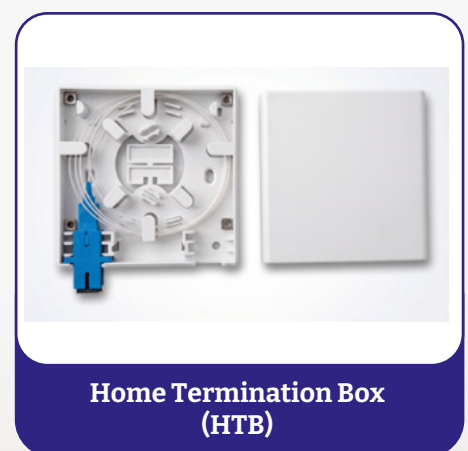

Home Termination Box (HTB)

Cable Management

6/8 Port Fiber Termination Box

Description

A compact wall- and DIN-rail-mountable enclosure for fiber distribution and splice protection in indoor installations and control panels. Cold-rolled steel with an electrostatic powder-coated Siemens Gray 7032 finish provides a robust, corrosion-resistant chassis. Adapter ports accept SC, FC, ST or LC duplex connectors; an integrated sleeve holder secures splices and pigtails, while a standard DIN rail clip enables fast deployment in distribution boards.

Features

- » Dual-mounting — standard DIN rail and direct wall mount.
- » 6-port and 8-port configurations.
- » Cold-rolled steel, electrostatic powder coat (Siemens Gray 7032).
- » SC / FC / ST / LC duplex adapter support (optional).
- » Integrated sleeve holder; PVC routing rings.
- » PVC cable glands; embossed wall-mount holes with nylon bushes.



6/8 Port Fiber Termination Box (DIN Rail Mount)

Optical Fiber Wall Mount Enclosure

Description

A double-door, lockable fiber termination unit for locations where standard 19-inch racks are impractical. Engineered for SM and MM deployments, it accepts a full range of ST, FC, SC and LC adapter plates in loaded or unloaded configurations, with four-point cable entry (two top, two bottom) for flexible routing. Scalable 12-to-96-port capacity suits small offices through to large enterprise and telecom premises.

Features

- » 12 / 24 / 48 / 96 port configurations.
- » Double-door, key-lockable steel enclosure.
- » Four-point cable entry (2 top, 2 bottom).
- » ST, FC, SC, LC adapter plates (SM & MM).
- » Loaded or unloaded supply.
- » Compact wall-mount footprint — no full cabinet needed.



Optical Fiber Wall Mount Enclosure

Cable Management

Rack Mount Fiber Management System

Description

A 19-inch / 21-inch rack-mount fiber management system delivering high-density cable management for data centres, telecom rooms and enterprise networks. Available in 1U, 2U, 4U and 6U heights supporting 6F to 576F terminations. CRCA steel construction with a powder-coat finish, removable top cover and sliding-tray mechanism give quick service access; available fully loaded (SM/MM) with pigtails, adapters and splice accessories.

Features

- » 19" / 21" rack; 1U / 2U / 4U / 6U heights; 6F–576F per enclosure.
- » FC, SC, ST and LC connector support.
- » Removable top cover and sliding tray for easy access.
- » Hinged ABS splice trays; maintains min. bend radius.
- » CRCA steel, powder coat 80–100 µm to RAL 7032; optional rodent cover.
- » Available fully loaded SM or MM.



Rack Mount Fiber Management System (FMS)

Fiber Distribution Box

Description

A compact, rugged termination enclosure for building premises within FTTx access networks, supporting straight-joint, branch and pass-through connectivity. It accommodates up to two 1×8 LGX splitter modules and up to 24 SC adaptors via an optional patch panel, with separate storage for drop cables and loose tubes for fast fault isolation. IP65-rated for indoor/outdoor use, engineering-plastic build, front access with safe-shaped lock and >120° opening.

Features

- » 1×4 to 2×16 PLC / LGX splitter module support.
- » IP65 — indoor and outdoor use.
- » Wall and pole mounting.
- » 24 drop-cable exit ports; separated drop/loose-tube routing.
- » Individual link testing without disturbing others.
- » Safe-shaped lock; >120° front-access opening.



Fiber Distribution Box (FDB) — PDR-FDB24B

Cable Management

Wall Mount Networking Rack

Description

A purpose-built wall-mount enclosure for small networking, domestic, audio-video, telecom and laboratory applications. Fabricated from CRCA steel by CNC punching, bending, welding and powder coating, it features a welded frame with side walls, a vented top cover with fan provision, rear wall-mount provision and a lockable toughened-glass front door. Available in 4U–15U heights with 400/450/500/600 mm depth options and a standard 550 mm width.

Features

- » Conforms to DIN 41494 / equivalent ISO standards.
- » Adjustable 19-inch mounting verticals; depth-adjustable slots.
- » CNC-fabricated CRCA steel; powder-coated with pretreatment.
- » Lockable toughened-glass front door.
- » Vented top/bottom with cable cut-outs; top fan provision
- » 4U–15U heights; 400/450/500/600 mm depth. (fan included except 4U)



Wall Mount Networking Rack (WMR)


Cat 6 24/48-Port Patch Panel

Description

A high-performance patch panel for structured cabling in enterprise and data-centre environments, available in 24-port (1U) and 48-port versions. Conforming to ISO/IEC 11801 and EIA/TIA 568A & 568B, it delivers reliable Gigabit and 10G-Base-T performance. RJ-45 keystone-style ports with integrated IDC terminations support T568A/B colour-coding and accept Keystone Jack and Krone modules, for 19-inch rack mounting.

Features

- » 24-port (1U) and 48-port configurations; ISO/IEC 11801, EIA/TIA 568A/B.
- » Cat 6 — Gigabit and 10G-Base-T capable.
- » Accepts Keystone Jack (F-F / F-Punchdown) and Krone modules.
- » SPCC metal panel with fireproof ABS UL-94V0 body.
- » RJ-45: 50 µ-inch gold-plated contacts; FR-4 1.6 mm PCB.
- » T568A/B coding; >250 IDC and >2,000 RJ-45 cycles.

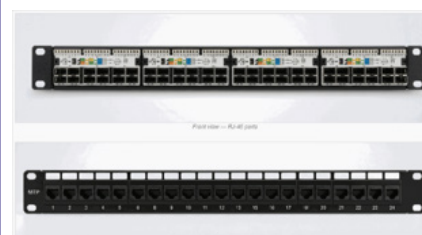

Cat 6 24/48-Port Patch Panel

Cable Management

Heat Shrink Splice Closure

Description

A robust, weatherproof closure for protecting and managing fiber splices in outdoor and harsh-environment deployments. Heat-shrink sleeve sealing at all cable entries supports butt-type configurations with up to 6 cable entries and a maximum 144 splices across 8 trays. PPCP dome and base with ABS trays and neoprene O-ring sealing achieve IP68 for aerial, underground and wall-mounted installs — no specialised tools required.

Features

- » IP68 sealing — immersed and buried deployments.
- » Up to 144 splices across 8 ABS trays (12 each).
- » Up to 6 cable entries (4 round, 1 oval); butt-type.
- » Strength-member clamp prevents sheath movement.
- » UV- and temperature-resistant PPCP dome/base.
- » No specialised tools required.



Heat Shrink Splice Closure

Horizontal Splice Closure

Description

A robust, re-enterable horizontal fiber optic splice closure for outdoor duct, aerial and wall-mounted installations. It accommodates all standard fiber cable types and supports up to 48 splices (2 × 24) within a compact 445 × 240 × 140 mm enclosure, with integrated sheath retention and central strength-member fastening. The ribbed, UV-resistant plastic body resists mechanical stress, chemicals and prolonged UV; rated IP65 and RoHS compliant.

Features

- » Suitable for cut, uncut and taut-sheath cable applications.
- » Up to 48 splices (2 × 24); 16 SC simplex adapter capacity.
- » 4 main cable ports (≤12 mm) + 16 drop ports (3 mm).
- » Integrated sheath retention + central strength-member fastening.
- » Ribbed UV-resistant plastic; chemical resistant.
- » Re-enterable and reusable; IP65; RoHS; hardware included.



Horizontal Splice Closure
HTSC-TL16

Active Optical Cable Series

Description

PDR Active Optical Cables are a cost-effective alternative to transceiver-and-patchcord assemblies, available in lengths from 0.5 m to 100 m — well beyond the reach of copper DAC. Ethernet, InfiniBand and MSA compliant, with data rates up to 400 Gb/s, Digital Diagnostic Monitoring (DDM) over I²C, and a high-strength pull-tab latch. Hot-swappable, low-power and high-density, they suit point-to-point links in data centres, HPC clusters and storage racks. Available in SFP+, SFP28, QSFP+, QSFP28, QSFP56 and QSFP-DD, in both straight and breakout (fan-out) configurations — PDR can support any standard configuration, length and connector combination on request.

Fan-out AOC Series Products



10G SFP+ AOC Cable



40G QSFP+ to 4x SFP+



100G QSFP28 to 4x SFP28



400G QSFP-DD to 4x QSFP28

Direct Attach Cable Series

Description

PDR Direct Attach Cables are hot-swappable twinax copper assemblies offering a low-cost, low-power alternative to optical modules on short-reach links. Fully compliant with SFF-8431, SFF-8432 and SFF-8472, they span 10G to 400G and are built for top-of-rack switching, HPC, enterprise networking and network storage. Passive and active variants, PVC jacket, bend radius 5× cable diameter, and AWG24/26/28/30 gauges. Available in SFP+, SFP28, QSFP+, QSFP28, QSFP56 and QSFP-DD, in both straight and breakout (fan-out) configurations — PDR can support any standard configuration, length and wire gauge on request.

Fan-out / SAS DAC Series Products



10G SFP+ DAC Cable



40G QSFP+ to 4x SFP+dac



100G QSFP28 to 4x SFP28 dac



200G QSFP-DD to 8x SFP28 dac

Optical Transceiver Series

Description

Optical modules are optoelectronic devices that realize photoelectric conversion and electro-optical conversion functions in the process of optical signal transmission. PDR optical modules includes: 1G, 10G, 25G, 40G, 100G, 400G optical transceivers. PDR high-speed cable assembly includes AOC and DAC at 10G, 25G, 40G, 100G and so on. All products are of low power consumption, high rate, small volume etc and the products are widely applied in the data center network, campus network and metropolitan area network environment.

1G SFP Series Products



1.25G BiDi 20km pair



1.25G duplex LC



1.25G BiDi 1310 1490nm



1.25G SM duplex 10km

10G SFP+/XFP Series Products



10G SFP Dual Fiber



10G SFP Single Fiber



10G SFP+ CWDM/DWDM



10G SFP-T

25G SFP28 Series Products



25G SFP28 SR



25G SFP28 LR



25G SFP28 CWDM/DWDM




25G SFP28 BiDi

Active Devices

Optical Transceiver Series

40G QSFP+ Series Products



40G QSFP+ SR4



40G QSFP+ PSM4



40G QSFP+ LR4



40G QSFP+ ER4

100G QSFP28 Series Products



100G QSFP28 SR4



100G QSFP28 LR4



100G QSFP28 ER4



100G QSFP28 ZR4

200G QSFP56 Series Products



200G QSFP56 SR4



200G QSFP56 2SR4/SR8



200G QSFP56 FR4



200G QSFP56 ER4

400G QSFP-DD Series Products



400G QSFP-DD SR8



400G QSFP-DD DR4



400G QSFP-DD FR4



400G QSFP-DD LR4

Optical Line Protection System

Description

The PDR Optical Line Protection System (OLP) is a 1U rack-mounted device that safeguards fiber networks through real-time power monitoring and automatic line switching. It watches both the primary and backup channels and instantly reroutes traffic when a signal degrades or breaks, operating transparently at the optical layer. It supports 1+1, 1:1 and 1-1 protection architectures with dual AC / -48V DC power redundancy.

Features

- » 1U rack-mount; supports 1+1, 1:1 and 1-1 protection architectures.
- » Automatic line switching with real-time monitoring of both channels.
- » Configurable switch delay (0-999 s) and auto switchback after recovery.
- » Dual power inputs (220V AC and -48V DC) for full redundancy.
- » Front-panel LCD with key control; RJ-45 and RS-232 with NMS support.
- » Selectable 1310 / 1550 nm operating wavelength.



Optical Line Protection System

Optical Bypass Switch

Description

The PDR Optical Bypass Switch is a 1U carrier-grade solution that automatically reroutes traffic around failed inline devices. It supports single-mode fiber (1310/1550 nm) across up to four channels, delivering sub-50 ms switching with low insertion loss. By monitoring power, optical signals, and TCP/IP heartbeats, it ensures seamless, hands-free failover.

Features

- » Automatic bypass via power, optical, and TCP/IP monitoring.
- » Fast <50 ms switching for seamless failover.
- » Up to 4 channels in a 1U chassis with Auto/Manual modes.
- » Single-mode LC/PC (9/125 μm), low loss (≤ 1.5 dB), high return loss (≥ 50 dB).
- » LCD display with RS-232 and RJ-45 management.
- » Dual power supply with logging and anti-oscillation protection.



Optical Bypass Switch


Remote Fiber Test System

Description

The PDR Remote Fiber Test System (RFTS) is a remotely managed OTDR platform that continuously monitors optical-fiber infrastructure - core, metro, access, FTTx and PON. Operating standalone or as part of a centralised system, it proactively tests, monitors and localises faults to cut Mean Time To Repair (MTTR).

Features

- » Monitors up to 16 optical fibers simultaneously.
- » Transmission distance up to 50 km.
- » Automated fault detection with accurate fault localisation.
- » Remote management over copper, fiber or cellular networks.
- » Standalone operation with real-time alarm notifications.
- » Event logging, historical tracking and an integrated IP SLA probe.

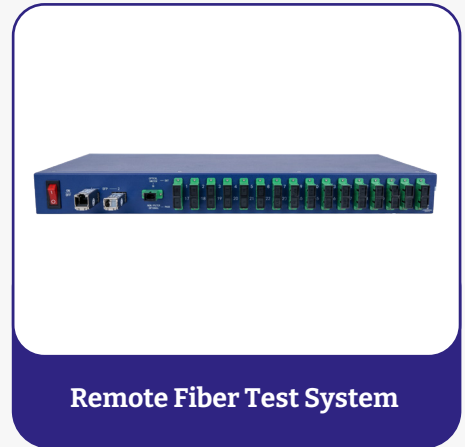

Remote Fiber Test System

Smart SFP OTDR

Description

The PDR Smart SFP OTDR is a Gigabit Ethernet / STM-1/4 transceiver with a built-in OTDR. Working as an ordinary SFP in any vendor's equipment, it automatically measures the distance to a fiber break the moment signal loss is detected - giving real-time, in-service fiber monitoring without a separate OTDR instrument.

Features

- » Two-in-one: SFP transceiver plus OTDR in a single module.
- » Instant fiber-break and event location.(air gap, dirty connector, bad splice).
- » Data + OTDR or OTDR-only modes; auto, manual or scheduled switching.
- » Up to 70 km data / 100 km measurement range; 56 dB OTDR budget.
- » Works over dark fiber and CWDM; supports 10/25/40/50/100G links via FWDM.
- » Results via DDM and module IDs; CLI / SNMP / Web management; SFP MSA compliant.



Smart SFP OTDR

Distributed Acoustic Sensing

Description

The PDR DAS system is an advanced sensing solution designed for the continuous 24/7 monitoring and protection of critical infrastructure, perimeters, and pipelines. Converting standard fiber optic cables into a multi-kilometer microphone array, this unit offers comprehensive support for real-time intrusion detection and acoustic analysis.

Features

- » Includes up to 50km continuous monitoring range, AI-driven threat classification, pinpoint meter-level accuracy, and quick detection of environmental vibrations.
- » Automated alerts with seamless API integration (C++, Python) to existing CCTV and VMS control rooms for easy viewing.
- » Intrinsically safe, covert fiber deployment that withstands EMI, lightning, and extreme outdoor environments.
- » Available in robust 3U All-in-One rack-mountable chassis.



Distributed Acoustic Sensing

Distributed Temperature Sensing

Description

The PDR DTS system is a highly precise thermal monitoring tool designed for the continuous temperature profiling of critical assets like battery energy storage systems (BESS), underground power grids, and pipelines. By utilizing standard fiber optic cables as linear heat sensors, this unit offers reliable, real-time fire detection and pinpoint hot-spot localization.

Features

- » Includes long-range temperature mapping and rapid hot-spot detection.
- » Automated thermal alerts with a built-in web-based management UI and continuous data logging for easy monitoring.
- » Intrinsically safe sensor cable design that withstands EMI, high voltage, and harsh industrial environments without electrical fire risk.
- » Available in a complete 1U rack-mount mainframe.



Distributed Temperature Sensing

Test & Measurement

Fusion Splicer

Description

Our state-of-the-art fusion splicer is designed for efficiency and portability, ideal for fiber optic installations and maintenance. It boasts a compact, handheld design that is both lightweight and robust. With an impressive 8-second splicing time and 26-second tube heating time, it ensures rapid and reliable splices.

Features

- » Easy to carry and use in various environments.
- » 8s splicing and 26s tube heating time.
- » 5800mAh pluggable Li-battery supports approximately 200 cycles per charge.
- » For software updates and data export.
- » Adjusts to temperature and air pressure changes.



Fusion Splicer (OPM+VFL)

Wireless Fiber Endface Microscope

Description

Maintaining clean and damage-free fiber endfaces is crucial to prevent attenuation or blockages in optical networks. Our Wireless Fiber Endface Microscope is an essential tool for field technicians, designed to provide fast, portable, and intuitive inspections of fiber endfaces. It transmits real-time videos and images to smart devices via WiFi. Field technicians can easily check fiber endfaces on their mobile devices. Its lightweight, portable design, built-in battery, universal Type-C interface, and LED lighting offer unparalleled user experience, making it the most practical tool for fiber endface inspections.

Features

- » Easy to carry and operate.
- » Supports WiFi and USB data transfer.
- » Concise, intuitive, and intelligent interface with real-time image viewing and automatic analysis.
- » Works with Windows, Android, and iOS devices.
- » Built-in battery lasts up to 5 hours.
- » Compatible with various charging devices.
- » Ideal for low-light or dark environments.
- » Perfect partner for OTDR, essential for field technicians.



Wireless Fiber Endface Microscope



Test & Measurement

Nano OTDR

Description

The PDR Nano OTDR is an ultra-compact, 4-in-1 handheld test instrument combining an Optical Time Domain Reflectometer (OTDR), Optical Power Meter (OPM), Optical Light Source (OLS), and Visual Fault Locator (VFL) in a single pocket-sized device. Operating at 1550 nm with a 22 dB dynamic range, it delivers fast and accurate fibre characterisation for FTTH, telecom, railway, and ISP networks. The device pairs wirelessly with Android smartphones via the dedicated Smart-OTDR app, providing real-time trace display, loss analysis, and ORL measurement on a familiar touchscreen interface. Its USB-C rechargeable 1000 mAh battery and nano form factor make it ideal for rapid field testing and fault localisation.

Features

- » 4 in 1 - OTDR + OPM + OLS + VFL combined in a single pocket-sized instrument.
- » Handheld, pocket-sized, and extra compact for true field portability.
- » 1550 nm wavelength with 22 dB dynamic range for comprehensive fibre testing.
- » Distance range up to 80 km with pulse widths from 5 ns to 20 ms.
- » Integrated with Mobile Application-Smart-OTDR app for Android.
- » OPM function: +26 to -50 dBm across 10 wavelengths (850-1650 nm).
- » VFL function: 20 mW output for quick visual fault detection.
- » USB-C rechargeable 1000 mAh lithium-ion battery for field operation.
- » Ultra-lightweight at approx. 100 g for all-day comfortable use.
- » Excellent for field operations in telecom, FTTx, railway, and ISP networks.



Nano OTDR



Smart-OTDR app



Test & Measurement

MPO Integrated Tester

Description

MPO integrated tester integrates the basic functions of MPO testing, including the light source, optical power meter, end detector and other functional modules, supporting 24-core MPO polarity and loss testing (compatible with 12 cores downward). The meter features a 5.6-inch colour touch screen and integrated MPO terminal detector to ensure connector cleanliness. The integrated and convenient MPO link solution ensures a fast and reliable workflow when testing and verifying the network links connected by MPO, which greatly facilitates the construction and maintenance of data.

Features

- » Supports single instrument polarity and loss testing at the same time.
- » Supports 24-core and 12-core testing.
- » 5.6-inch LCD touch screen.
- » Support customizable pass or not in threshold.
- » Any of two instruments can remote different systems in pair.
- » Supports USB end detector function (optional).



MPO Integrated Tester

Optical Fiber Identifier

Description

The Optical Fiber Identifier is an essential tool for fiber optic network maintenance and troubleshooting. It allows technicians to detect signals without disconnecting or interrupting the fiber. This portable and efficient device ensures accurate and reliable identification of live fibers.

Features

- » Enables technicians to identify live fibers without disconnecting them, ensuring uninterrupted service during maintenance.
- » Supports multiple fiber diameters making it adaptable for different fiber types and applications.
- » Uses two InGaAs detectors for high sensitivity, ensuring accurate signal detection across a wide wavelength range.
- » LED indicators provide clear visual cues for signal direction, frequency, and battery status, simplifying the testing process.



Optical Fiber Identifier

Test & Measurement

Mini Optical Power Meter

Description

A pocket-sized handheld optical power meter for fast field verification of optical power and link loss. It covers the six standard calibrated wavelengths

(850/1300/1310/1490/1550/1625 nm) over a -70 to +10 dBm range with an InGaAs detector, in a lightweight body with a universal 2.5 mm FC/SC/ST interface — ideal as a low-cost technician tool. Many mini models also include a visual fault locator (VFL) and LED torch.

Features

- » Six calibrated wavelengths: 850/1300/1310/1490/1550/1625 nm.
- » Measurement range -70 to +10 dBm.
- » InGaAs detector; dBm/mW/ dB (relative) display.
- » Universal 2.5 mm FC/SC/ST adapter.
- » Compact pocket body; auto power-off, long battery life.
- » Optional VFL and LED torch on many variants.



Mini Optical Power Meter
(PDR60)

PON Power Meter

Description


A rugged, handheld PON power meter for simultaneous optical power measurement at all three PON wavelengths: 1310 nm (upstream), 1490 nm (downstream data) and 1550 nm (downstream video). A large backlit LCD shows all three channels at once for one-step verification of FTTH, GPON and EPON links without reconnecting leads. A -50 to +26 dBm range with ± 0.25 dB accuracy suits both installation acceptance and ongoing maintenance.

Features

- » Simultaneous 1310 / 1490 / 1550 nm display.
- » Wide -50 to +26 dBm range; ± 0.25 dB accuracy.
- » Large backlit LCD; SC/APC and SC/UPC ports.
- » USB logging, PC connectivity and firmware upgrade.
- » SAVE stores up to 99 records; ≥ 40 h battery life.
- » GPON (G.984), EPON (802.3ah) and XG-PON compatible.



PON Power Meter
(PDR4213B)

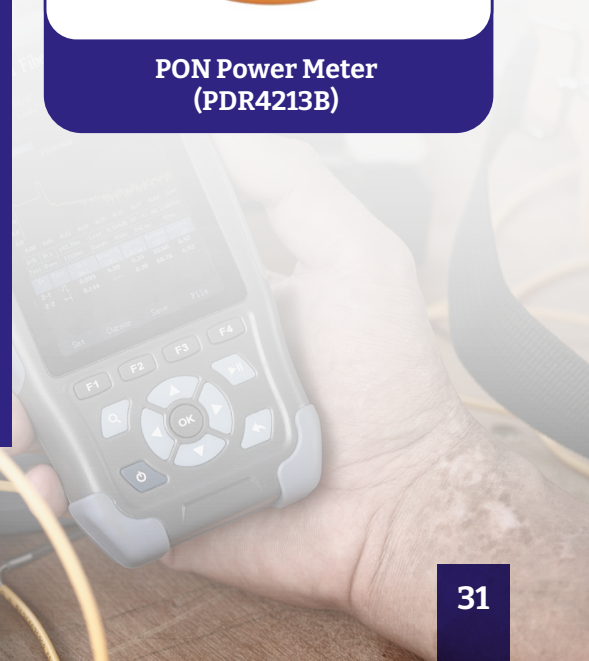

Cassette Cleaner

Description

The Cassette Cleaner is an essential accessory for maintaining and ensuring high-quality cleaning of fiber optic connectors. It is designed to be compatible with a wide range of connector types, including SC, FC, MU, LC, ST, D4, DIN, and E2000. This tool helps in achieving optimal performance and longevity of fiber optic terminations by providing efficient and thorough cleaning.

Features

- » Utilizes a special material for cleaning that ensures effective removal of contaminants without using alcohol.
- » Designed for user-friendly operation and minimizes static buildup, which can attract dust particles connectors.
- » Provides high-level cleaning to maintain the performance of fiber optic.
- » The tape can be replaced easily, ensuring low maintenance costs and prolonged use.
- » Each cassette is capable of over 500 cleaning cycles, making it a cost-effective solution.
- » Delivers a cleaning level rated at 100, ensuring optimal connector performance.



Cassette Cleaner

MPO Connector

Description

A specialized, antistatic fiber optic cleaning tool designed for efficiently maintaining and clearing debris from MPO and MTP connectors.

Features

- » Compatible with MPO/MTP connectors.
- » Works with or without pins.
- » Ergonomic handling.
- » Antistatic properties.
- » Protects sensitive components.
- » Provides over 500 cleaning cycles per unit.



MPO Connector

Fiber Optic Cleaner Pen

Description

The Fiber Optic Cleaner Pen is designed to clean female fiber optic connectors, removing dust, oil, and debris without scratching the ferrule. It helps maintain optimal performance and extends the life of fiber connections.

Features

- » A simple pushing motion engages the connector and initiates the cleaning process, making it user-friendly and efficient.
- » Each unit is disposable but provides over 800 cleanings, making it a cost-effective solution.
- » Constructed from anti-static resin to minimize static build-up and prevent dust attraction.
- » Equipped with densely stranded microfibers that are debris-free, ensuring thorough cleaning without leaving residues.
- » The extendable tip allows access to recessed connectors, enhancing versatility.
- » The cleaning system rotates 180 degrees for a complete and effective sweep of the ferrule end face.
- » Produces an audible click when engaged, confirming the cleaning action.



One- Click Cleaner SC



One- Click Cleaner LC

Fiber Optic Cleaner Pen – MPO

Description

The MPO Cleaner is a high-performance tool for cleaning MPO/MTP connector end-faces. It cleans all 12 fibers at once without alcohol, removing debris safely and efficiently for both jumpers and adapters.

Features

- » Removes dust and oil for optimal performance.
- » FOCIS-5 (MPO) compliant for wide compatibility.
- » Cleans with/without guide pins, inside/outside adapters.
- » Slim design for tight spaces.
- » One-handed use with up to 500 cleanings.
- » Cost-effective, low cost per clean.



Fiber Optic Cleaner Pen – MPO



MANAGEMENT SYSTEM CERTIFICATE



www.royalapl.com



MANAGEMENT SYSTEM CERTIFICATE



www.royalapl.com

This is to certify that

PDR VIDEOTRONICS (I) PVT. LTD.

OFFICE - 99, OLD PRABHADEVI ROAD, MUMBAI - 400025, MAHARASHTRA, INDIA.
WORKS - FILMCITY STUDIO COMPLEX, GEN ARUNKUMAR VAIDYA ROAD, GOREGAON (EAST),
MUMBAI - 400065, MAHARASHTRA, INDIA.

has been assessed by RAPL and found to comply with the requirements of

ISO 9001 : 2015 Quality Management Systems

For the following activities:

MANUFACTURING AND SUPPLY OF FIBER OPTIC CABLE, ASSEMBLIES, FIBER OPTIC CABLE
ACCESSORIES & RELATED TESTING AND MEASUREMENT EQUIPMENTS.

Certificate Number: E20260141172
Date of Certification: 09/01/2026
1st Surveillance on or before: 08/01/2027
Certification Valid Until: 08/01/2028



Accredited
QMS Certification CAB# 119012

Director (Certification)
Royal Assessments Pvt. Ltd.

623 A, Tower-B, 1Thum, Plot No. A - 40, Sector - 62, Noida 201301, India.
www.royalapl.com, info@royalapl.com
Phone : +91 120 4251329
This Certificate can be verified at www.iafcertsearch.org

This Certificate is an endorsement of certified clients certification status but remains the property of Royal Assessments Pvt. Ltd. Certificate must be returned on RAPL's request or if certificate is withdrawn. Validity of certificate is subject to successful completion of surveillance audits. RAPL is accredited by EGAC, Egypt. EGAC is member of International Accreditation Forum (IAF) and signatory of MLA.

This is to certify that

PDR VIDEOTRONICS (I) PVT. LTD.

OFFICE - 99, OLD PRABHADEVI ROAD, MUMBAI - 400025, MAHARASHTRA, INDIA.
WORKS - FILMCITY STUDIO COMPLEX, GEN ARUNKUMAR VAIDYA ROAD, GOREGAON (EAST),
MUMBAI - 400065, MAHARASHTRA, INDIA.

has been assessed by RAPL and found to comply with the requirements of

ISO 14001 : 2015 Environmental Management Systems

For the following activities:

MANUFACTURING AND SUPPLY OF FIBER OPTIC CABLE, ASSEMBLIES, FIBER OPTIC CABLE
ACCESSORIES & RELATED TESTING AND MEASUREMENT EQUIPMENTS.

Certificate Number: E20260141173
Date of Certification: 09/01/2026
1st Surveillance on or before: 08/01/2027
Certification Valid Until: 08/01/2028



Accredited
EMS Certification CAB# 119012

Director (Certification)
Royal Assessments Pvt. Ltd.

623 A, Tower-B, 1Thum, Plot No. A - 40, Sector - 62, Noida 201301, India.
www.royalapl.com, info@royalapl.com
Phone : +91 120 4251329
This Certificate can be verified at www.iafcertsearch.org

This Certificate is an endorsement of certified clients certification status but remains the property of Royal Assessments Pvt. Ltd. Certificate must be returned on RAPL's request or if certificate is withdrawn. Validity of certificate is subject to successful completion of surveillance audits. RAPL is accredited by EGAC, Egypt. EGAC is member of International Accreditation Forum (IAF) and signatory of MLA.

RoHS CERTIFICATE



Certificate of Compliance

This is to Certify that the following designated products :

FDMS (LIU) 6 Port, 12 Port, 24 Port and 48 Port.
Fully Loaded With Adaptors, Plates, Pigtails.

This certificate of compliance is based on the technical file of above mention products

Manufactured By :

PDR VIDEOTRONICS (I) PVT . LTD.

Gr Floor, 99, Old Prabhadevi Road, Worli, Mumbai City ,
400025 - Maharashtra, India

Application of Council Directive on the Restriction of the use of certain
Hazardous Substances in Electrical and Electronic Equipment 2011/65/EU

CERTIFICATE No. : 23ZCCG0396R

INITIAL ISSUE DATE : 16/08/2022
REISSUE DATE : 16/08/2025
EXPIRY DATE : 15/08/2028
1st SURVEILLANCE : 15/08/2026
2ND SURVEILLANCE : 15/08/2027



Authorised Signatory

INTERNATIONAL QUALITY CERTIFICATION SERVICES UK LTD

272, Bath Street, Glasgow, G2 4JR, UK.
This Certificate is Intellectual Property of IQCS and can be maintained through surveillance and renewal audits.
Certificate should be returned to IQCS in case of non compliance of certification procedures.
Authenticity of this certificate can be verified at www.ukasnet.co.uk / www.iqcsnet.co.uk
The Registration is not a Product Quality Certificate.





PDR Videotronics (India) Pvt. Ltd.

📍 Head Office Location

99, Old Prabhadevi Road, Mumbai - 400 025 India

📍 Manufacturing Location

Filmcity Complex, Gen. Arun Kumar Vaidya Road,
Goregaon East, Mumbai- 400065.

☎ +91 86910 00897/95946 56333

✉ info@pdrworld.com

🌐 www.pdrworld.com





**Empowering
Networks with
Superior Connectivity**

