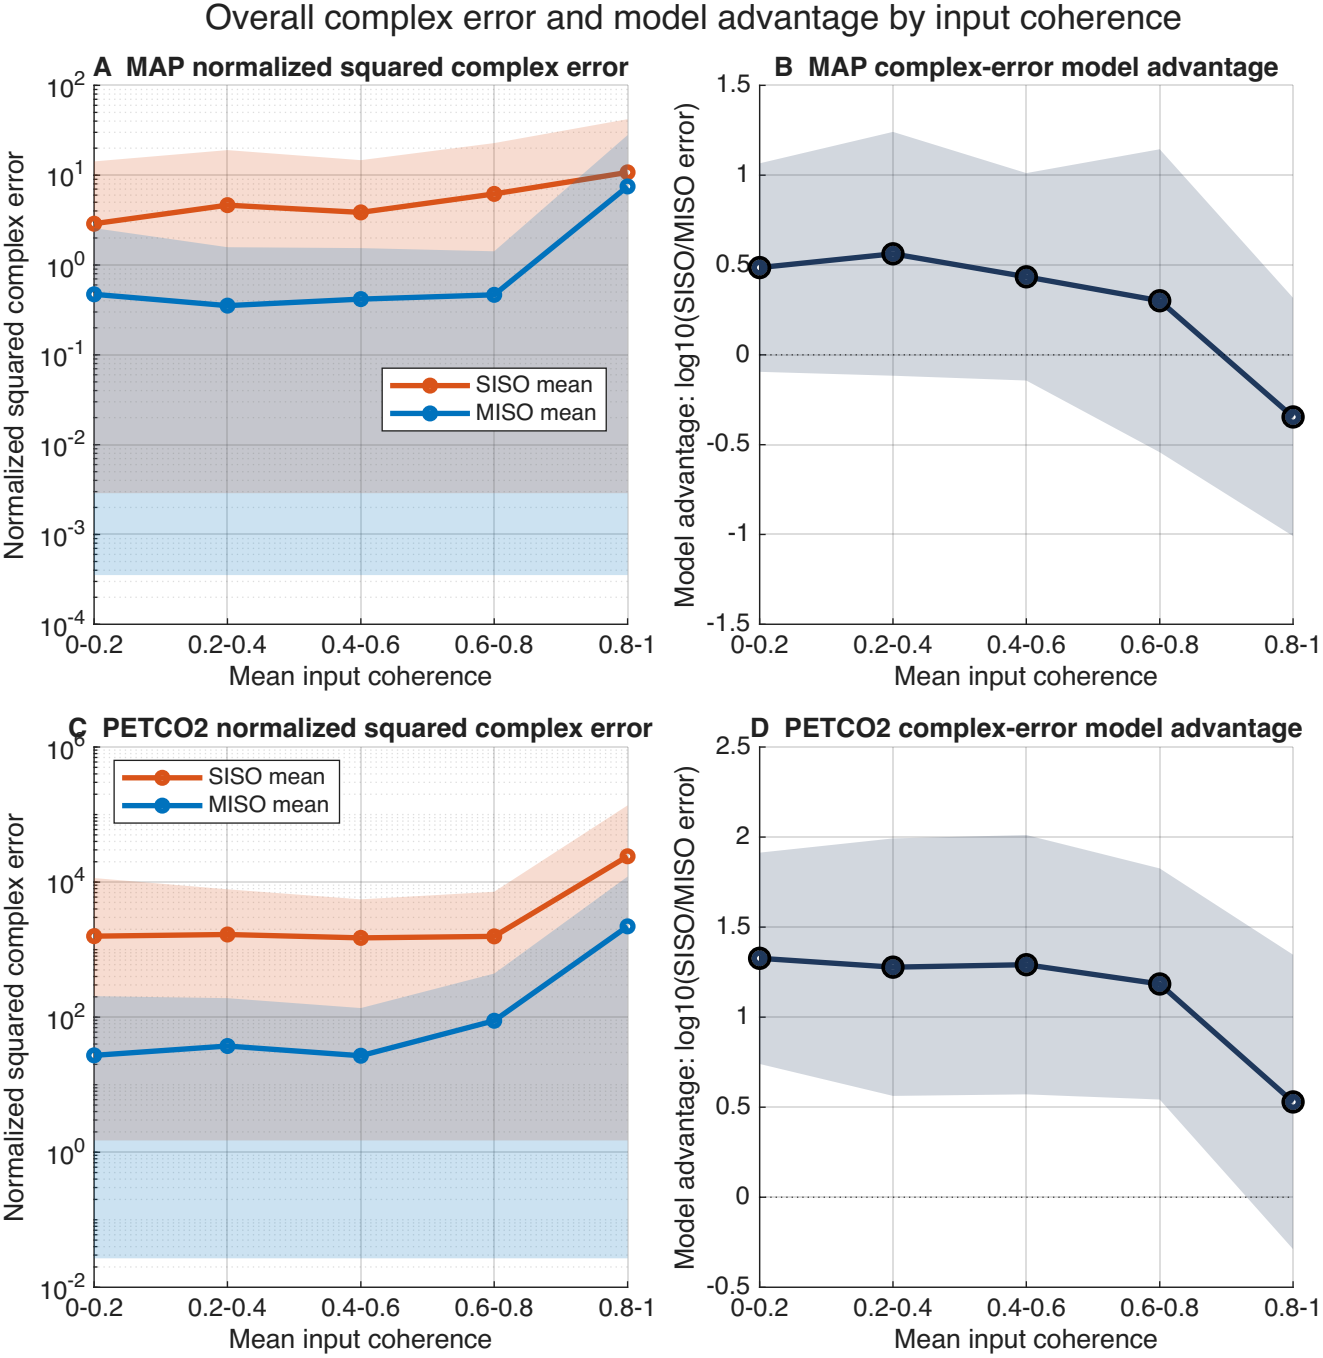

Overall complex error and model advantage by input coherence
A MAP normalized squared complex error
Normalized squared complex error
SISO mean
MISO mean
Mean input coherence
0-0.2
0.2-0.4
0.4-0.6
0.6-0.8
0.8-1
B MAP complex-error model advantage
Model advantage: log10(SISO/MISO error)
Mean input coherence
C PETCO2 normalized squared complex error
Normalized squared complex error
SISO mean
MISO mean
Mean input coherence
D PETCO2 complex-error model advantage
Model advantage: log10(SISO/MISO error)
Mean input coherence