
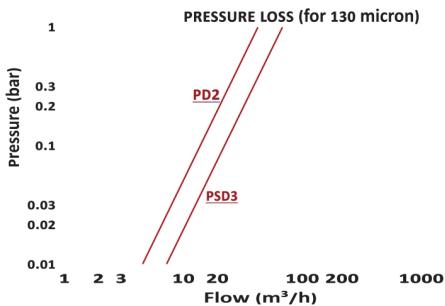


REFERENCE	DESIGNATION
AFS-2"	FILTRE À DISQUE AFS 2"
AFS-3"	FILTRE À DISQUE AFS 3"

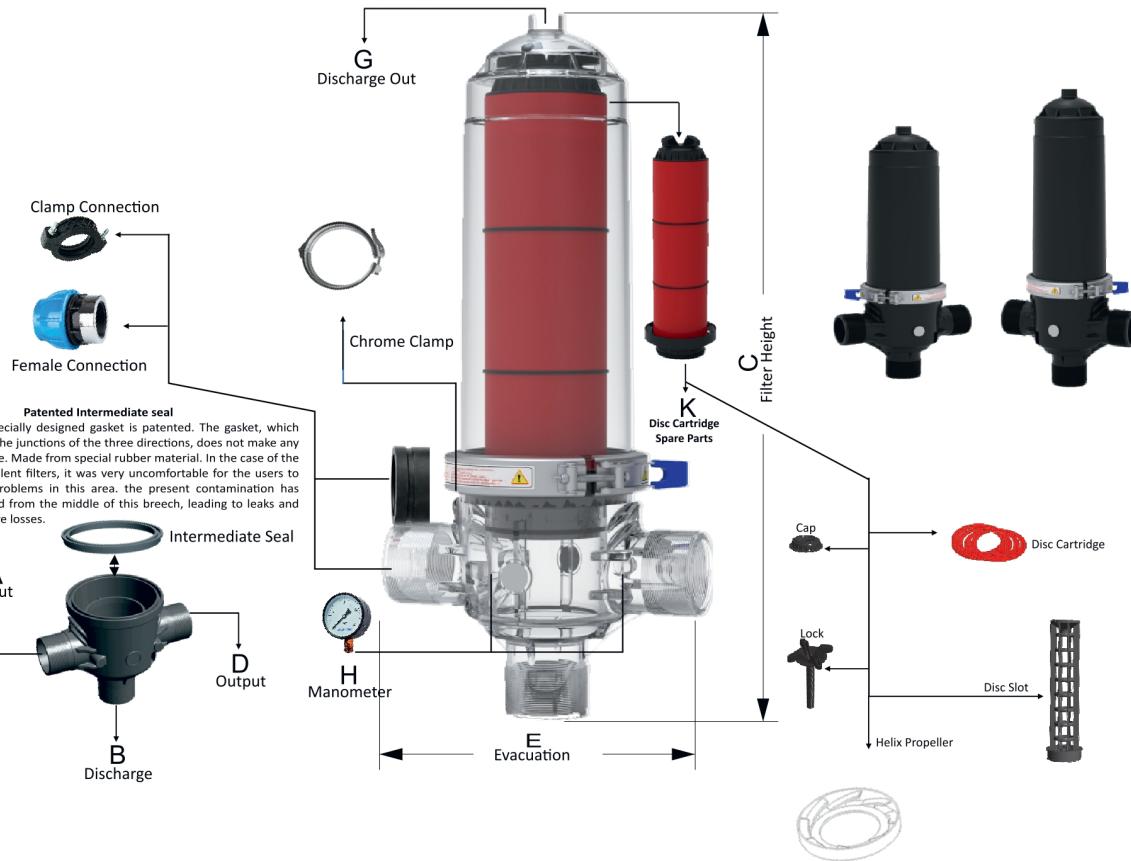

**Filter Cleaning**  
Inner tool cleaning can also be done when discs are loosened by unscrewing the first part of the butterfly nut in disc filters. For detailed cleaning, the butterfly nut is completely removed and the discs are cleaned with the aid of pressurized water or Acid cleaning solutions. It is very important that the periodic maintenance is carried out on time so that the product can operate long-lived.

PHYSICAL TESTS			
DENSITY (23 °C)	ISO 1183 g/cm³	1,34	
ASH CONTENT	ISO 3451-4 %	25	
DETERMINATION OF WATER CONTENT	ISO 15512 %	0,1	
MOLD SHRINKAGE - PARALLEL / NORMAL (3mm)	ISO 294-4 %	0,5/0,9	

Product		A - D		C	E	F	G	H	I	J	K
Code	Explanation	Input	Output	Filter Height	Filter Width	Discharge Out	Manometer	Capacity	Operating Pressure	Weight	Cartridge
AFS-2"	Grand	2	63	78	35	¾	¼	30	10	7,90-	Disk (Disc)
AFS-3"	Grand	3	90	78	35	¾	¼	45	10	8,10-	Disk (Disc)