TECHNICAL DATA SHEET



PRODUCT – DOCK LEVELER 12T

Model:- LI-DL-6T

KEY SPECIFICATION

Capacity	6/8/10 to 40T*
Platform size	2000x3000mm*
Powered by	Hydraulic

ELECTRIC SPECIFICATION

Powered by	0.75 Kw 1HP Electric motor
RPM	1450
Power spec	220/380 V, 3Phase 50/60Hz

HYDRAULIC SPECIFICATION

Operation Pressure	80 bar
Max. Pressure	120 bar
Rated Displacement	4 L/min
Tank capacity	8 Litters**
Lifted by	Hydraulic cylinder
Structure Cylinder	Single acting
Lip Cylinder	Double acting

TECHNICAL PARAMETERS


Lip Size	1800x 350x14 mm*
Vertical Working Range	
Above deck	600 mm
Below Deck	-300 mm
Lip Structure	Full width and 400mm* projection
Weight Approx.	1300 kg**
Platform material	Steel non-slip checker plate
Surface finish	Anti-corrosive – RAL3028 and 5001 or others as specified

OPERATION


Control	Three button (Manuel)
Control Panel	Heavy duty shielded

Design Standard	EN 1398:2009
Martial grade	ASTM A36

Above dock position

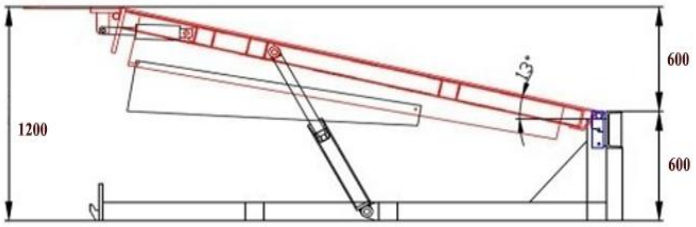

Below dock position

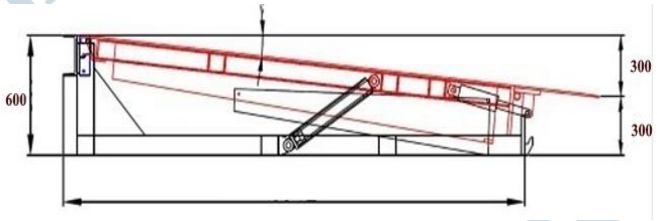

Safety/Other Features

- Safety stickers.
- Safety lock bar for maintenance.
- Emergency stop button.
- Heavy duty fenders mad with rubber and steel
- Platform size customized as per requirement

*Customizable **Vary with capacity and size

Phone: +966 55 007 2446 Email: info@leshaind.com Web: www.leshaind.com