



Solutions for:
Lifting
Rigging
Mooring



ATLAS Industry & Project Support Co.

Tel: +98 21 66 56 14 05 - 7
Fax: +98 21 66 93 91 80
Web: www.atlasip.com
Email: info@atlasip.com



Catalogue volume No#1


Atlas Group is one of the leaders in lifting, rigging and mooring material supply in the Middle East region. Times have certainly changed and over the years we have built up a reputation as a leader in the provision of products and services in the power, oil and gas industry.

Atlas Group stocks and supplies a wide range of products like high performance wire ropes, fittings, cable laid heavy lifting slings and grommets, chains , anchors, sockets, shackles, hooks, etc.

The company's long term vision is to be a world-class innovative and creative organization driven by effective leadership and workforce to provide value added services that constantly meet and exceed customer needs and expectations in the markets.

We are focused upon ensuring that we are an efficient supplier of the highest quality products and services. Such was our dedication to meeting our customers' demands and expectations, towards quality excellence.

At Atlas Group, we seek to exceed your expectations by proposing the lowest prices, granting the fastest services and following the highest quality.

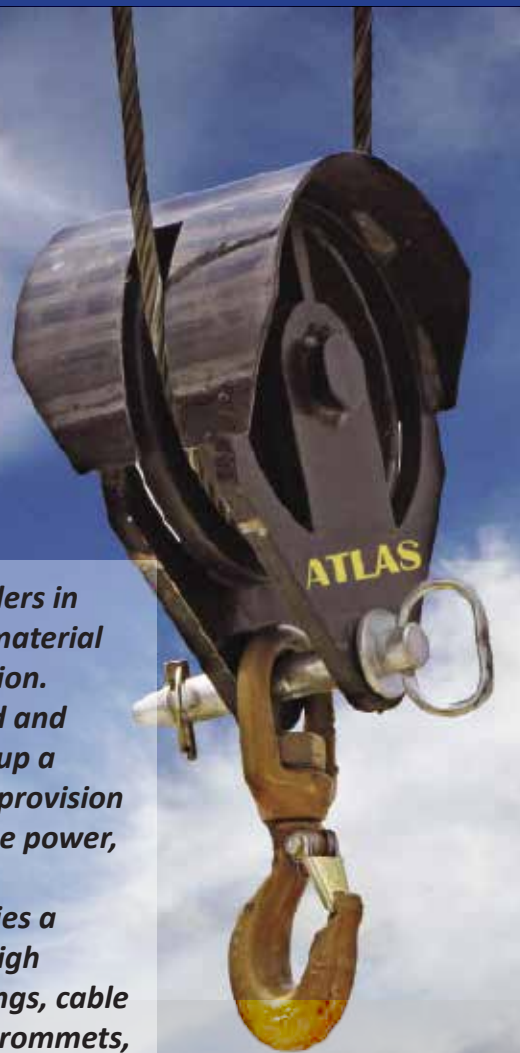



about us




Material Supply

- **Supply of Marine, Oil & Gas industries equipment**
- **Supply of lifting & rigging equipment**
- **Sling & Grommet, Types of Shackles, Hook, Block, Winches, Wire & Soft ropes**
- **Supply of spare parts, Steel Material & Sheet piles.**

تامین اقلام

تامین اقلام صنعت دریا و نفت و گاز
تامین اقلام لیفتینگ و ریگینگ
انواع اسلینگ و گرومت، شگل، قلاب
قرقره، وینچ، سیم بکسل و طناب
تامین قطعات یدکی، آهن آلات و شیت پایل



Commercial Services (Transportation & Customs Services)

- **Business Services**
(Customs Services & Sourcing)
- **Cargo Transportation from all over the world to Iran and from Iran to all over the world**
- **Nominating Consignee in other countries and transit to Iran**
- **Customs services in Iran & UAE**

خدمات بازرگانی شامل خدمات گمرکی و معرفی منابع تامین کننده

خدمات حمل کالا از تمام نقاط جهان به ایران و بالعکس

معرفی در کشورهای ثالث و ترانزیت به ایران

خدمات گمرکی در ایران و امارات متحده عربی

خدمات بازرگانی

(حمل و نقل و امور گمرکی)



Manufacturing and Construction

- **Types of Block**
- **Foam Buoy Modules, Anchor Buoy & Marker Bouy**
- **Anchors**
- **Many kinds of Industrial Parts**
- **Lifting Belf**

ساخت و تولید


قرقره های صنعتی
بویه های شناوری فومی، بویه لنگر
و بویه نشان گذار
لنگر
انواع بسیاری از قطعات صنعتی
تسمه باربرداری



Marine Weather Forecast Service

خدمات پیش بینی وضع هوا در مناطق دریایی از طریق:

- **IRIMO** (نماینده ای ایرانی)
- **StormGeo (Met Consultancy)**
- **Global Meteocean**
- **Fugro**

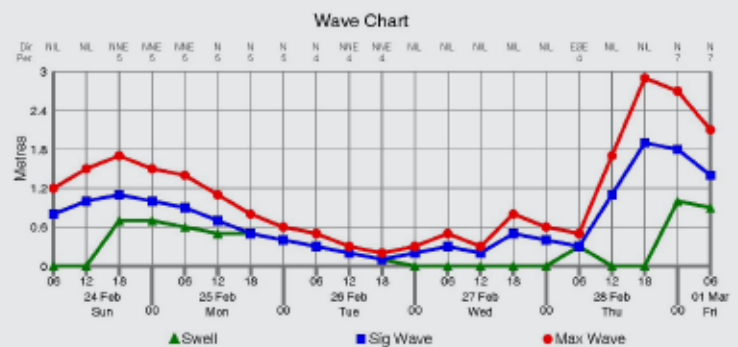

Contents

Bolt Type Shackles	3
Screw Pin Shackles	4
Wide Body Shackles	5
Standard Shackles	6
Wide Mouth Shackles	8
U-Bolt, Clips	9
Mooring Sockets	10
Open Spelter Socket	11
Closed Spelter Socket	13
Closed Body Swivel	14
Wire rope Thimbles	15
Wire Lock	16
Anchor Lines & A & R Winch Ropes	17
Marine Riser Tensioner Lines & Drilling Lines	18
Large Diameter Crane Ropes & Oil Industry Wire Ropes	19
Stainless Steel Wire Rope	20
Turnbuckles & Rigging Screws	21
Master Link & Connecting Link	22
Hooks	23
Plate Lifting Clamps	24
Manual & Multi-Purpose Marine Winch	25
Snatch Block	26
Cable Laid Sling & Cable Laid Grommet	27
Max Wire Rope Sling & Gator – Rex Sling	28
Gator – Flex Grommets- Wire Rope Slings	29
Flat Polyester Webbing Slings	30
Nylon Rope	31
Polypropylene Rope	32
Manila Rope	33
Eye Types, Eye Styles, Flat Endless Slings, Special Purpose Slings	34
G-Link™ Synthetic Sling Connector	35
Grade 10 Short Link Chain & Load Cell	36
Cast Steel Danforth High Holding Power Anchor	37
Delta High Holding Power Anchor	
Parachute Liftbag & Liftbag	38

Bolt Type Shackles



**G2130
BOW/ANCHOR
SHACKLES**

Capacities 1/3 through 150 metric tons.

Forged — quenched and tempered, with alloy pins.

Hot-dip galvanised or self coloured.

Fatigue rated.

products meet or exceed all the requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, products meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B20.26.

Shackles 55 metric tons and smaller can be furnished proof tested with certificates to designated standards, such as ABS, DNV, Lloyds, or other certification. Shackles 85 metric tons and larger can be provided as follows


-Non Destructive Tested

- Serialized Pin and Bow

(Material Certification (Chemical) Certification must be requested at time of order).




**G2150
BOW/CHAIN
SHACKLES**

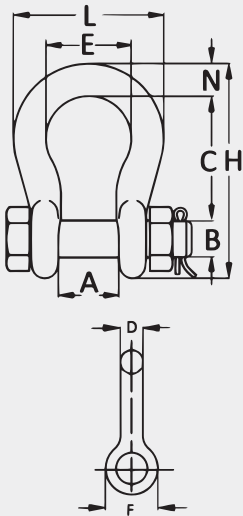

G2130

Nominal Size Inches	Working load limit Tonnes	Stock No.		Weight kgs	Stock No.										Tolerance	
		G2130	S2130		A	B	C	D	E	F	H	L	N	C	A	
3/16	1/3	1019464	-	0.03	9.65	6.35	22.4	4.85	15.2	14.2	37.3	24.9	4.85	1.5	1.5	
1/4	1/2	1019466	-	0.05	11.9	7.85	28.7	6.35	19.8	15.5	46.7	32.5	6.35	1.5	1.5	
5/16	3/4	1019468	-	0.10	13.5	9.65	31	7.85	21.3	19.1	53	37.3	7.85	3.3	1.5	
3/8	1	1019470	-	0.15	16.8	11.2	36.6	9.65	26.2	23.1	63	45.2	9.65	3.3	1.5	
7/16	1/2-1	1019471	-	0.22	19.1	12.7	42.9	11.2	29.5	26.9	74	51.5	11.2	3.3	1.5	
1/2	2	1019472	1019481	0.36	20.6	16	47.8	12.7	33.3	30.2	83.5	58.5	12.7	3.3	1.5	
5/8	1/4-3	1019490	1019506	0.62	26.9	19.1	60.5	16	42.9	38.1	106	74.5	17.5	6.35	1.5	
3/4	3/4-4	1019515	1019524	1.23	31.8	22.4	71.5	19.1	51	46	126	89	20.6	6.35	1.5	
7/8	1/2-6	1019533	1019542	1.79	36.6	25.4	84	22.4	58	53	148	102	24.6	6.35	1.5	
1	1/2-8	1019551	1019560	2.28	42.9	28.7	95.5	25.4	68.5	60.5	167	119	26.9	6.35	1.5	
1-1/8	1/2-9	1019579	1019588	3.75	46	31.8	108	28.7	74	68.5	190	131	31.8	6.35	1.5	
1-1/4	12	1019597	1019604	5.31	51.5	35.1	119	31.8	82.5	76	210	146	35.1	6.35	1.5	
1-3/8	1/2-13	1019613	1019622	7.18	57	38.1	133	35.1	92	84	233	162	38.1	6.35	3.3	
1-1/2	17	1019631	1019622	9.43	60.5	41.4	146	38.1	98.5	92	254	175	41.1	6.35	3.3	
1-3/4	25	1019659	1019668	15.4	73	51	178	44.5	127	106	313	225	57	6.35	3.3	
2	35	1019677	1019686	23.7	82.5	57	197	51	146	122	348	253	61	6.35	3.3	
2-1/2	55	1019695	1019702	44.6	105	70	267	66.5	184	145	453	327	79.9	6.35	6.35	
3	85	1019711	-	70	127	82.5	330	76	200	165	546	365	92	6.35	6.35	
3-1/2	120	1019739	-	120	133	95.5	372	92	229	203	626	419	105	6.35	6.35	
4	150	1019757	-	153	140	108	368	104	254	229	653	468	116	6.35	6.35	

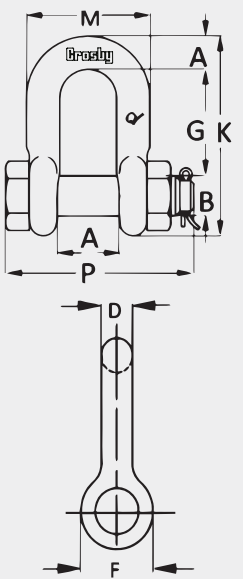

G2150

Nominal Size Inches	Working load limit Tonnes	Stock No.		Weight kgs	Stock No.										Tolerance	
		G2150	S2150		A	B	D	F	G	K	M	P	R	G	A	
1/4	1/2	1019768	-	0.06	11.99	7.85	6.35	15.5	19.1	40.4	24.6	39.6	6.35	1.50	1.50	
5/16	3/4	1019770	-	0.1	13.5	9.65	7.85	19.1	25.4	48.5	29.5	46.2	7.85	1.50	1.50	
3/8	1	1019772	-	0.15	16.8	11.2	9.65	23.1	31	58.5	35.8	55	9.65	3.30	1.50	
7/16	1-1/2	1019774	-	0.22	19.1	12.7	11.2	26.9	36.1	67.5	41.1	63.5	11.2	3.30	1.50	
1/2	2	1019775	1019784	0.34	20.6	16	12.7	30.2	41.4	77	46	71	12.7	3.30	1.50	
5/8	3-1/4	1019793	1019800	0.67	26.9	19.1	16	38.1	51	95.5	58.5	89.5	16	3.30	1.50	
3/4	4-3/4	1019819	1019828	1.14	31.8	22.4	19.1	46	60.5	115	70	103	20.6	6.35	1.50	
7/8	6-1/2	1019837	1019846	1.74	36.6	25.4	22.4	53	71.5	135	81	120	24.6	6.35	1.50	
1	8-1/2	1019855	1019864	2.52	42.9	28.7	25.4	60.5	81	151	93.5	135	25.4	6.35	1.50	
1-1/8	9-1/2	1019873	1019882	3.45	46	31.8	28.7	68.5	91	172	103	150	31.8	6.35	1.50	
1-1/4	12	1019891	1019908	4.9	51.5	35.1	31.8	76	100	191	115	165	35.1	6.35	1.50	
1-3/8	13-1/2	1019917	1019926	6.24	57	38.1	35.1	84	111	210	127	183	38.1	6.35	3.30	
1-1/2	17	1019935	1019944	8.39	60.5	41.4	38.1	92	122	230	137	196	41.1	6.35	3.30	
1-3/4	25	1019953	1019962	14.2	73	51	44.5	106	146	279	162	230	54	6.35	3.30	
2	35	1019971	1019980	21.2	82.5	57	51	122	172	312	184	264	60	6.35	3.30	
2-1/2	55	1019999	1020004	38.6	105	70	66.5	145	203	377	238	344	66.5	6.35	6.35	
3	85	1020013	-	56	127	82.5	76	165	216	429	379	419	89	6.35	6.35	

Screw Pin Shackles




**G209
BOW/ANCHOR
SHACKLES**

Shackles are Quenched and Tempered and can meet DNV impact requirements of 42 joules at -20°C..
Working Load Limit permanently shown on every shackle.
Forged - Quenched and Tempered, with alloy pins.
Capacities 1/3 thru 55 metric tons.
Look for the Red Pin® the mark of genuine Crosby quality.
Shackles can be furnished proof tested with certificates to designated standards, such as ABS, DNV, L1oyds, or other certification. Charges for proof testing and certification available when requested at the time of order. Hot Dip galvanized. Fatigue rated.




**G210
D/CHAIN®
SHACKLES**

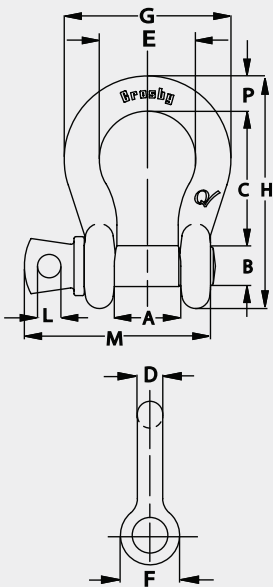

G209

Nominal Size Inches	Working load limit Tonnes	Stock No.		Weight kgs	Dimensions mm														Tolerance	
		G209	S209		A	B	C	D	E	F	G	H	I	M	P	C	A			
3/16	1/3	1018357	-	0.03	9.65	6.35	22.4	4.85	15.2	14.2	24.9	37.3	4.06	28.4	4.85	1.50	1.50			
1/4	1/2	1018375	1018384	0.05	11.9	7.85	28.7	6.35	19.8	15.5	32.5	46.7	4.85	35.1	6.35	1.50	1.50			
5/16	3/4	1018393	1018400	0.09	13.5	9.65	31	7.85	21.3	19.1	37.3	53	5.60	42.2	7.85	3.30	1.50			
3/8	1	1018419	1018428	0.14	16.8	11.2	36.6	9.65	26.2	23.1	45.2	63	6.35	51.5	9.65	3.30	1.50			
7/16	1-1/2	1018437	1018446	0.17	19.1	12.7	42.9	11.2	29.5	26.9	51.5	74	7.85	6.5	11.2	3.30	1.50			
1/12	2	1018455	1018464	0.33	20.6	16	47.8	12.7	33.3	30.2	58.5	83.5	9.65	68.5	12.7	3.30	1.50			
5/8	3-1/4	1018473	1018482	0.62	26.9	19.1	60.5	16	42.9	38.1	74.5	106	11.2	85	17.5	6.35	1.50			
3/4	4-3/4	1018491	1018507	1.07	31.8	22.4	71	19.1	51	46	89	126	12.7	101	20.6	6.35	1.50			
7/8	6-1/2	1018516	1018525	1.64	36.6	25.4	84	22.4	58	53	102	148	12.7	114	24.6	6.35	1.50			
1	8-1/2	1018534	1018543	2.28	42.9	28.7	95.5	25.4	68.5	60.5	119	167	14.2	129	26.9	6.35	1.50			
1-1/8	9-1/2	1018552	1018561	3.36	6	31.8	108	29.5	74	68.5	131	190	16	142	37.8	6.35	1.50			
1-1/4	12	1018570	1018589	4.31	51.5	35.1	119	32.8	82.5	76	146	210	17.5	156	35.1	6.35	1.50			
1-3/8	13-1/2	1018598	1018605	6.14	57	38.1	133	36.1	92	84	162	233	19.1	174	38.1	6.35	3.30			
1-1/2	17	1018614	1018623	7.80	60.5	41.4	146	39.1	98.5	92	175	254	20.6	187	41.1	6.35	3.30			
1-3/4	25	1018632	1018641	12.6	73	51	178	46.7	127	106	225	313	25.4	231	57	6.35	3.30			
2	35	1018650	1018669	20.4	82.5	57	197	53	146	122	253	348	31	263	61	6.35	3.30			
2-1/2	55	1018678	1018687	38.9	105	70	267	69	184	145	327	453	35.1	330	79.5	6.35	6.35			

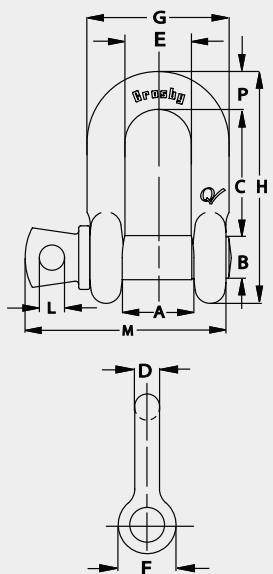

G210

Nominal Size Inches	Working load limit Tonnes	Stock No.		Weight kgs	Stock No.												Tolerance	
		G210	S210		A	B	C	D	E	F	G	K	L	M	A	A		
1/4	1/2	1019150	1019169	0.05	11.9	7.85	6.35	6.35	24.6	15.5	22.4	40.4	4.85	35.1	1.50	1.50		
5/16	3/4	1019178	1019187	0.08		9.65		7.85	29.5	19.1	26.2	48.5	5.62	42.2	1.50	1.50		
3/8	1	1019196	1019203	0.13	13.5	11.2	7.85	9.65	35.8	23.1	31.8	58.5	6.35	51.5	3.30	1.50		
7/16	1 1/2	1019212	1019221	0.2	16.8	12.7	9.65	11.2	41.4	26.9	36.6	67.5	7.85	60.5	3.30	1.50		
1/2	2	1019230	1019249	0.2	19.1	16	11.2	12.7	46	30.2	41.4	77	9.65	68.5	3.30	1.50		
5/8	3-1/4	1019258	1019267	0.57	20.6	19.1	12.7	16	58.5	38.1	51	95.5	11.2	85	3.30	1.50		
3/8	4-3/4	1019276	1019285	1.2	26.9	22.4	15.7	19.1	70	46	60	115	12.7	101	6.35	1.50		
7/8	6-1/2	1019294	1019301	1.43	31.8	25.4	20.6	22.4	81	53	71.5	135	12.7	114	6.35	1.50		
1	8-1/2	1019310	1019329	2.15	36.6	28.7	24.6	25.4	93.5	60.5	81	151	14.2	129	6.35	1.50		
1-1/8	9-1/2	1019338	1019347	3.06	42.9	31.8	25.4	28.7	103	68.5	91	172	16	142	6.35	1.50		
1-1/4	12	1019356	1019365	4.11	46	35.1	31.8	31.8	115	76	100	191	17.5	156	6.35	3.30		
1-3/8	13-1/2	1019374	1019383	5.28	51.5	38.1	35.1	35.1	127	84	111	210	19.1	174	6.35	3.30		
1-1/2	17	1019392	1019409	7.23	57	41.4	38.1	38.1	137	92	122	230	20.6	187	6.35	3.30		
1-3/4	25	1019418	1019427	12.1	60.5	51	41.1	44.5	162	103	146	279	25.4	231	6.35	3.30		
2	35	1019436	1019445	19.2	73	57	54	51	184	122	172	312	31	263	6.35	3.30		
2-1/2	55	1019454	1019463	32.5	82.5	70	60	66.5	238	145	203	377	35.1	330	6.35	6.35		

Wide Body Shackles



G-2160

All sizes are quenched and tempered for maximum strength. Forged alloy steel from 30 through 300 metric tons. Cast alloy steel from 400 through 1000 metric tons. Sizes 400 tons and larger are tested to 1.33 the working load limit. All ratings are in metric tons, embossed on the side of the bow. Bows and pins are furnished dimecoated. All pins are dimecoated then painted red.

Greatly improves wearability of wire rope slings.


Can be used to connect High Strength synthetic web slings, High Strength synthetic round slings or wire rope slings. Increase in shackle bow radius provides minimum 58% gain in sling bearing surface and eliminates need for a thimble. Increases usable sling strength minimum of 15%.

Pin is non-rotating, with held on handles for easier use (300T and larger)

All 2160 shackles are individually proof tested, certification available at time of order.

Shackles requiring ABS, DNV, Lloyds and other certifications are available upon request and must be specified at time of order. Shackles are produced in accordance with certified lifting appliance requirements Material testing/ Identification (Physical / Chemical / Charpy)- Proof testing

Products meet or exceed all the requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, products meet other critical Performance requirements including fatigue life, not addressed by ASME B30.26.

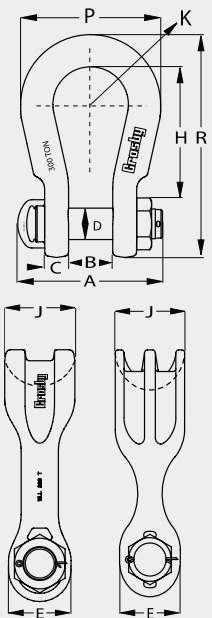

G-2160

Working load limit Tonnes	Stock No. G-2160	Weight Each kgs	Dimensions mm											
			A	B -/+ 6.35	C	D -/+ 0.5	E	G	H	J	K	P	R	
30 †	1021575	11.3	197	60.5	35.1	41.4	90.4	51	165	79.5	63.5	232	279	
40 †	1021584	15.9	230	73.2	44.05	51	102	59	205	95.3	76.2	270	346	
55 †	1021593	32.2	264	82.5	51	57.4	118	66.8	238	114	88.9	327	394	
75 †	1021290	45	346	105	54	70	121	64	290	120	92.5	313	465	
125 †	1021307	73	400	130	65	80	145	80	365	150	110	380	576	
200 †	1021316	227	508	150	85	105	185	110	480	205	137	495	757	
300 †	1021325	368	591	185	102	133	235	140	600	265	160	601	950	
400 ††	1021334	472	715	220	131	160	280	160	575	320	185	690	985	
500 ††	1021343	625	809	250	142	180	318	170	630	340	225	790	1085	
600 ††	1021352	831	913	275	153	200	350	185	700	370	247	865	1200	
700 ††	1021361	1109	992	300	167	215	376	200	735	400	270	940	1275	
800 ††	1021254	1368	986	325	183	230	400	210	750	420	277	975	1323	
900 ††	1021389	1559	1050	350	198	250	430	220	757	440	293	1025	1373	
1000††	1021370	1824	1176	380	212	270	250	230	760	460	308	1075	1405	

Crosby Screw Pin Shackles

Mooring Sockets

Wide Body Shackles

Green Pin Standard Shackles

Green Pin Wide Mouth Shackles

Crosby Bolt Type Shackles

Green Pin Standard Shackles

Green Pin Standard Shackles



G-209

Screw pin anchor shackles meet the performance requirements of Federal Specification RR-C-271D Type IVA, Grade A, Class 2



G-213

Round pin anchor shackles meet the performance requirements of Federal Specification RR-C-271D Type IVA, Grade A, Class 1



G-2130

Bolt-type anchor shackles meet the performance requirements of Federal Specification RR-C-271D Type IVA, Grade A, Grade A, Class 3



G-210

Screw pin chain shackles meet the performance requirements of Federal Specification RR-C-271D Type IVB, Grade A, Class 2



G-215

Round pin chain shackles meet the performance requirements of Federal Specification RR-C-271D Type IVB, Grade A, Class 1



G-2150

Bolt-type chain shackles meet the performance requirements of Federal Specification RR-C-271D Type IVB, Grade Ar.

Standard Shackles



G-4161

Dee shackles with screw collar pin

G-4151

• Material : bow and pin high tensile steel, Grade 6, quenched and tempered

• Safety Factor : MBL equals 6 x WLL

• Standard : EN 13889 and

Meets performance requirements of US Fed.

Spec. RR-C-271 Type IVB Class 2, Grade A

• Finish : hot dipped galvanized

• Temperature Range : -20 °C up to +200 °



G-4163

Dee shackles with safety bolt

G-4153

• Material: bow and pin high tensile steel, Grade 6, quenched and tempered

• Safety Factor : MBL equals 6 x WLL


• Standard : EN 13889 and

Meets performance requirements of US Fed.

Spec. RR-C-271 Type IVB Class 3, Grade A


• Finish : hot dipped galvanized

• Temperature Range : -20 °C up to +200 °

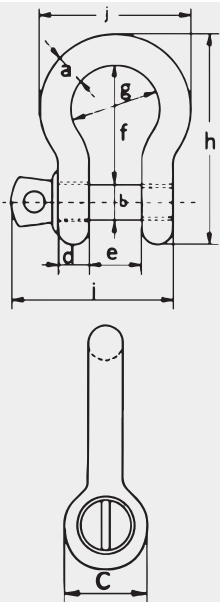

G-4161

working load	diameter bow	diameter pin	diameter eye	width eye	width inside	length inside	width bow	length	length bolt	width	weight each
tones	a	b	c	d	e	f	g	h	i	j	kg
0.33	5	6	12	5	9.5	22	16	36	29.5	26	0.02
0.5	7	8	16.5	7	12	29	20	48.5	38	34	0.05
0.75	9	10	20	9	13.5	32	22	56	46.5	40	0.1
1	10	11	22.5	10	17	36.5	26	63.5	54	46	0.14
1.5	11	13	26.5	11	19	43	29	74	59.5	51	0.19
2	13.5	16	34	13	22	51	32	89	73	58	0.36
3.25	16	19	40	16	27	64	43	110	89	75	0.63
4.75	19	22	46	19	31	76	51	129	103	89	1.01
6.5	22	25	52	22	36	83	58	144	119	102	1.5
8.5	25	28	59	25	43	95	68	164	137	118	2.21
9.5	28	32	66	28	47	108	75	185	153	131	3.16
12	32	35	72	32	51	115	83	201	170	147	4.31
13.5	35	38	80	35	57	133	92	227	186	162	5.55
17	38	42	88	38	60	146	99	249	203	175	7.43
25	45	50	103	45	74	178	126	300	243	216	12.84
35	50	57	111	50	83	197	138	331	272	238	18.15
42.5	57	65	130	57	95	222	160	377	310	274	26.29
55	65	70	145	65	105	260	180	433	344	310	37.6

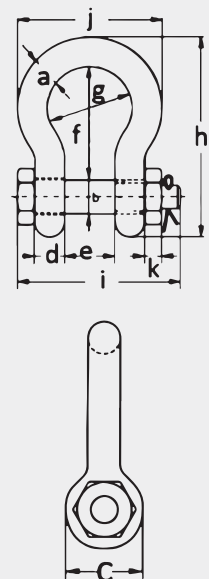

G-4163

working load	diameter bow	diameter pin	diameter eye	width eye	width inside	length inside	width bow	length	length bolt	weight	thickness nut	weight each
tones	a	b	c	d	e	f	g	h	i	j	k	kg
0.5	7	8	16.5	7	12	29	20	48.5	42	34	4	0.06
0.75	9	10	20	9	13.5	32	22	56	50	40	5	0.11
1	10	11	22.5	10	17	36.5	26	63.5	60	46	8	0.16
1.5	11	13	26.5	11	19	43	29	74	68	51	11	0.22
2	13.5	16	34	13	22	51	32	89	82	58	13	0.42
3.25	16	19	40	16	27	64	43	110	98	75	17	0.74
4.75	19	22	46	19	31	76	51	129	114	89	19	1.18
6.5	22	25	52	22	36	83	58	144	130	102	22	1.77
8.5	25	28	59	25	43	95	68	164	150	118	25	2.58
9.5	28	32	66	28	47	108	75	185	166	131	27	3.66
12	32	35	72	32	51	115	83	201	178	147	30	4.91
13.5	35	38	80	35	57	133	92	227	197	162	33	6.54
17	38	42	88	38	60	146	99	249	202	175	19	8.19
25	45	50	103	45	74	178	126	300	249	216	23	14.22
35	50	57	111	50	83	197	138	331	269	238	26	19.85
42.5	57	65	130	57	95	222	160	377	301	274	29	28.33
55	65	70	145	65	105	260	180	433	330	310	32	39.59
85	75	83	162	73	127	329	190	527	380	340	39	62

Standard Shackles



G-4151

Dee shackles with screw collar pin

G-4151

• Material : bow and pin high tensile steel, Grade 6, quenched and tempered

• Safety Factor : MBL equals 6 x WLL

• Standard : EN 13889 and

Meets performance requirements of US Fed.

Spec. RR-C-271 Type IVB Class 2, Grade A

• Finish : hot dipped galvanized

• Temperature Range : -20 °C up to +200 °C



G-4153

Dee shackles with safety bolt

G-4153

• Material : bow and pin high tensile steel, Grade 6, quenched and tempered

• Safety Factor : MBL equals 6 x WLL


• Standard : EN 13889 and

Meets performance requirements of US Fed.

Spec. RR-C-271 Type IVB Class 3, Grade A


• Finish : hot dipped galvanized

• Temperature Range : -20 °C up to +200 °C



G-4151

working load	diameter bow	diameter pin	diameter eye	width eye	width inside	length inside	length	length bolt	weight each
tones	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	kg
0.33	5	6	12	5	9.5	19	33	29.5	0.02
0.5	7	8	16.5	7	12	22	41.5	38	0.05
0.75	9	10	20	9	13.5	26	50	46.5	0.09
1	10	11	22.5	10	17	32	59	54	0.14
1.5	11	13	26.5	11	19	37	63	49.5	0.19
2	13.5	16	34	13	22	43	81	73	0.32
3.25	16	19	40	16	27	51	97	89	0.54
4.75	19	22	46	19	31	59	112	103	0.87
6.5	22	25	52	22	36	73	134	119	1.34
8.5	25	28	59	25	43	85	154	137	2.08
9.5	28	32	66	28	47	90	167	153	2.77
12	32	35	72	32	51	94	180	170	3.72
13.5	35	38	80	35	57	115	209	186	5.14
17	38	42	88	38	60	127	230	203	6.85
25	45	50	103	45	74	149	271	243	11.45
35	50	57	111	50	83	171	305	272	16.86
42.5	57	65	130	57	95	190	345	310	24.61
55	65	70	145	65	105	203	376	344	32.65



G-4153


working load	diameter bow	diameter pin	diameter eye	width eye	width inside	length inside	length	length bolt	thickness nut	weight each
tones	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	kg
2	13.5	16	34	13	22	43	81	82	13	0.39
3.25	16	19	40	16	27	51	97	98	17	0.67
4.75	19	22	46	19	31	59	112	114	19	1.08
6.5	22	25	52	22	36	73	134	130	22	1.66
8.5	25	28	59	25	43	85	154	150	25	2.46
9.5	28	32	66	28	47	90	167	166	27	3.4
12	32	35	72	32	51	94	180	178	30	4.51
13.5	35	38	80	35	57	115	209	197	33	6.1
17	38	42	88	38	60	127	230	202	19	7.63
25	45	50	103	45	74	149	271	249	23	13.25
35	50	57	111	50	83	171	305	269	26	18.53
42.5	57	65	130	57	95	190	345	301	29	25.94
55	65	70	145	65	105	203	376	330	32	35.33
85	75	83	162	73	127	229	427	380	39	52.97

Wide Mouth Shackles



G-4263


- bow shackles with safety bolt
- Material : bow and pin alloy steel, Grade 8, quenched and tempered
- Safety Factor : MBL equals 6 x WLL
- Finish : hot dipped galvanized
- Temperature Range : -20 °C up to +200 °C

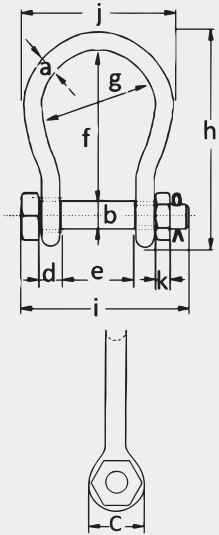

G-4263

working load	diameter bow	diameter pin	diameter eye	width eye	width inside	length inside	width bow	length	length bolt	width	thickness nut	weight each
tones	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	k mm	kg
4.75	22	25	52	22	63	112	88	173	157	132	23	2.08
6.5	25	28	59	25	75	135	105	204	182	155	25	3.14
8.5	28	32	66	28	82	148	115	225	201	171	28	4.36
9.5	32	35	72	32	90	162	126	248	217	190	31	5.95
12	35	38	79	35	100	180	140	274	240	210	34	7.87
16	38	42	88	38	106	216	159	319	248	235	19	12.5
25	45	50	103	45	127	248	175	370	296	265	24	18
30	50	57	118	50	146	273	207	411	338	307	27	25
55	65	70	145	65	165	314	213	487	389	343	33	48
75	75	83	166	75	184	330	254	530	432	404	40	70

GN FORGED ROPE SHACKLE TYPE H14 SLING PROTECTOR (WIDE BODY)



Art.No.	WLL ton	A mm	B mm	C mm	D mm	E mm	F mm	G mm	R mm	Weight kgs
36000040	40	45	50	73	210	140	95	105	50	16
36000055	55	60	56	90	240	160	115	116	60	31
36000075	75	70	70	105	290	185	120	135	70	45
36000125	125	80	80	130	365	220	150	152	80	120
36000150	150	90	95	140	390	250	170	185	90	160
36000200	200	105	105	150	480	275	205	225	110	230
36000250	250	110	120	170	550	300	240	240	130	320
36000300	300	140	134	185	600	350	265	280	140	340
36000400	400	160	160	220	600	370	320	330	170	620
36000500	500	170	180	250	650	450	340	350	180	800
36000600	600	180	200	275	720	490	370	405	190	960
36000700	700	200	215	300	750	540	400	465	210	1250
36000800	800	220	230	325	780	555	420	465	210	1400
36000900	900	238	250	350	850	585	440	480	220	2100
36001000	1000	240	270	380	850	615	460	530	230	2200
36001250	1250	260	300	430	930	645	530	570	270	2800
36001500	1500	280	320	460	950	680	560	610	290	3300

Material : Alloy steel quenched and tempered
Safety factor: 5 times

Finish Certificates: Painted
Standard: 3.1B material
Manufacturer Proof load


U-Bolt, Clips



G-450

Each base has a Product Identification Code (PIC) for material traceability, the name "Crosby" or CG, and a size forged into it. Entire clip is made from 316 stainless steel to resist corrosive and rusting action. All components are Electro-Polished. All clips are individually bagged or tagged with proper application instructions and warning information.

Also available in stainless steel SS-450

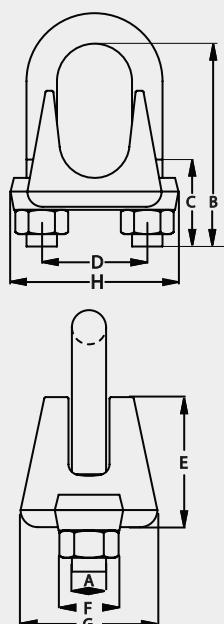

G-450

Rope Size mm	G-450 Stock No.	Std. Package Qty.	Weight per 100 kg	Dimension mm							
				A	B	C	D	E	F	G	H
3-4*	1010015	100	2.72	5.6	18.3	11.2	11.9	10.4	9.65	20.6	23.9
5*	1010033	100	4.54	6.35	24.6	14.2	15	12.7	11.2	23.9	29.5
6-7	1010051	100	8.62	7.85	26.2	12.7	19.1	16.8	14.2	30.2	36.6
8	1010079	100	12.7	9.65	35.1	19.1	22.4	18.3	17.5	33.3	42.9
9-10	1010097	100	21.8	11.2	38.1	19.1	25.4	23.1	19.1	41.4	49.3
11	1010113	50	35.4	12.7	47.8	25.4	30.2	26.2	22.4	46	58
13-12	1010131	50	36.3	12.7	47.8	25.4	30.2	28.7	22.4	48.5	58
14-15	1010159	50	49.4	14.2	57	31.8	33.3	31	23.9	52.5	63.5
16	1010177	50	49.9	14.2	60.5	31.8	33.3	34	23.9	52.5	63.5
18-20	1010195	25	64	15.7	70	36.6	38.1	35.8	26.9	57	72
22	1010211	25	96	19.1	79	41.1	44.5	40.4	31.8	62	80.5
24-26	1010239	10	114	19.1	89	46	47.8	45.2	31.8	67	88
28-30	1010257	10	128	19.1	98.5	51	51	48.5	31.8	71.5	91
32-34	1010275	10	199	22.4	108	54	59.4	55.5	36.6	79.5	105
36	1010293	10	200	22.4	118	58.5	59.4	58.5	36.6	79.5	106
38	1010319	10	247	22.4	125	60.5	66.5	62	36.6	86.5	113
41-42	1010337	Bulk	319	25.4	135	66.5	70	67.5	41.4	92	121
44-46	1010355	Bulk	424	28.7	146	70	77.5	74.5	46	97	134
48-52	1010373	Bulk	590	31.8	164	76	86	77	51	113	149
56-58	1010391	Bulk	726	31.8	181	81	98.5	81	51	114	162
62-65	1010417	Bulk	862	31.8	195	88	105	93.5	51	103	168
**68-72	1010435	Bulk	1043	31.8	211	91	111	124	51	127	175
75-78	1010453	Bulk	1406	38.1	233	98.5	121	119	60.5	149	194
**85-90	1010426	Bulk	1814	38.1	273	114	140	152	60.5	157	213

SS-450

Rope Size mm	G-450 Stock No.	Std. Package Qty.	Weight per 100 kg	Dimension mm							
				A	B	C	D	E	F	G	H
3-4	1010015	100	2.72	5.6	18.3	11.2	11.9	10.4	9.65	20.6	23.9
5	1010033	100	4.54	6.35	24.6	14.2	15	12.7	11.2	23.9	29.5
6-7	1010051	100	8.62	7.85	26.2	12.7	19.1	16.8	14.2	30.2	36.6
8	1010079	100	12.7	9.65	35.1	19.1	22.4	18.3	17.5	33.3	42.9
9-10	1010097	100	21.8	11.2	38.1	19.1	25.4	23.1	19.1	41.4	49.3
11	1010113	50	35.4	12.7	47.8	25.4	30.2	26.2	22.4	46	58

Mooring Sockets




G-517
"M-Line"

Wide range of sizes available: - 2" through 3-5/8" Wire Line
"M-Line" socket terminations have a 100% efficiency rating, based on the catalogue strength of the wire rope.
Galvanised finish.
Designed for today's higher strength classes of wire rope.
Design of bail allows for easy connection to shackles and other connecting links.
Socket design utilizes features to keep cone from rotating.




G-417 / S-417

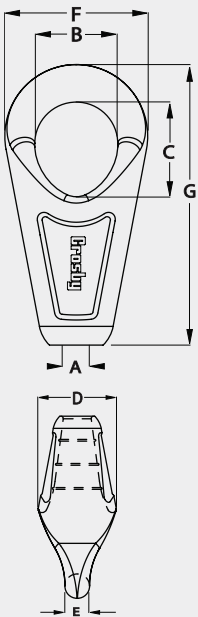

G-517

Rope Dia.		Ultimate Load (t)	G-517 Stock No.	Weight Each (kg.)	Dimension mm							
(mm)	(in.)				A	B	C	D	E	F	G	H
32-35	1-1/4 - 1-3/8	113	1004943	7.7	41.4	78.5	92.2	113	366	130	277	389
38-41	1-1/2 - 1-5/8	136	1004961	13.6	49.5	93.7	110	138	40.6	160	330	46
44-48	1-3/4 - 1-7/8	181	1004989	19.5	56.6	106	115	160	46.7	183	358	53.1
50-54	2 - 2-1/8	227	1005002	25.9	63.5	121	134	178	53.1	210	407	56.9
57-60	2-1/4 - 2-3/8	277	1005020	34.5	70.6	133	146	196	58.7	233	455	66.6
64-67	2-1/2 - 2-5/8	363	1005048	48.1	77.5	149	170	217	68.3	257	505	67.6
70-73	2-3/4 - 2-7/8	454	1005066	62.6	84.6	165	181	237	76.2	282	549	63
76-79	3 - 3-1/8	544	1005084	87.5	89.9	184	197	262	82.6	313	597	82.3
82-86	3-1/4 - 3-3/8	635	1005105	104	96.8	194	224	278	88.9	334	654	87.1
88-92	3-1/2 - 3-5/8	735	1005123	127	105	203	230	298	93.7	355	703	105
95-102	3-3/4 - 4	907	1005141	174	112	222	267	328	93.7	403	765	113



G-417 / S-417


Nominal Size Inches	Structural Strand Dia mm	Stock No.		Weight kgs	Stock No.									
		G-417 Galv	G-417 S.C		A	B	C	D	F	G	H	J	K	L
6-7	-	1039897	1039904	0.23	116	12.7	40	22	9.7	18	40	57	13	46
8-10	-	1039913	1039922	0.34	125	15.8	43	25	13	21	43	57	18	52
11-13	-	1039931	1039940	0.68	140	17.5	51	30	14	24	51	64	23	59
14-16	12-13	1039959	1039968	1.13	162	20.6	67	36	18	30	67	76	25	65
18	14-16	1039977	1039986	1.92	194	26.9	76	42	22	33	70	89	32	78
20-22	18-19	1039995	1040000	3.28	226	33.3	92	49	25	38	83	102	38	91
24-26	20-22	1040019	1040028	4.76	254	36.6	105	59	29	45	96	114	45	103
28-30	24-26	1040037	1040046	6.46	283	39.6	114	65	32	51	105	127	51	116
32-35	28	1040055	1040064	8.95	309	41.4	127	71	38	59	119	138	57	129
38	30-32	1040073	1040082	13.24	355	49.3	137	81	41	71	132	151	63	155
†40-42	33-35	1040091	1040108	16.32	390	54	146	83	45	76	140	165	70	171
†44-48	36-40	1040117	1040126	25.96	445	55.5	11	96	51	80	162	191	76	198
†50-54	42-45	1040135	1040144	35.83	505	62	194	111	57	96	187	216	83	224
†56-60	46-48	1040153	1040162	47.62	546	70	216	127	67	105	210	229	92	248
†64-67	50-54	1041759	1041768	63.5	597	79.5	241	140	75	114	235	248	102	270
†70-73	56-62	1041777	1041786	99.79	645	79.5	273	159	80	124	259	279	124	286
†75-80	64-67	1041795	1041802	125	689	85.6	292	171	86	133	292	305	133	298
†82-86	70-73	1041811	1041820	142	743	102	311	184	92	146	311	330	146	311
†88-92	76-80	1041839	1041848	181	787	102	330	197	99	160	330	356	159	330
†94-102	-	1041857	1041866	246	845	108	362	216	108	184	362	381	178	356

Open Spelter Socket




G-416
S-416

Forged steel sockets through 1-1/2", cast alloy steel 1-5/8" through 4".
Spelter socket terminations have an efficiency rating of 100%, based on the catalogue strength
Of wire rope. Ratings are based on recommended use with 6 x 7, 6 x 19, or 6 x 37, IPS or XIP (EIP),
XXIP (EEIP), RRL, FC, or IWRC wire rope.

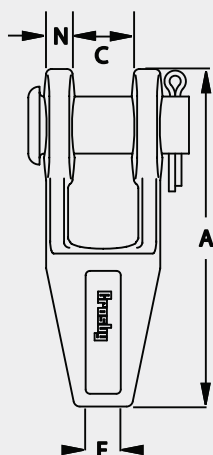

G-416	Nominal Size Inches	Structural Strand Dia mm	Stock No.		Weight kgs	Dimensions mm									
			G-416 Galv	G-416 S.C		A	C	D	F	G	H	J	L	M	N
	6-7	-	1039619	1039628	0.5	116	19.1	17.5	9.65	17.5	39.6	57	39.6	33.3	9.1
	8-10	-	1039637	1039646	0.59	123	20.6	20.6	12.7	20.6	42.9	57	45.5	38.1	11.2
	11-13	-	1039655	1039664	1.02	141	25.4	25.4	14.2	23.9	47.8	63.5	51	47.8	12.7
	14-16	12-13	1039673	1039682	1.63	171	31.8	30.2	17.5	28.7	57	76	63.5	57	14.2
	18	14-16	1039691	1039708	2.64	202	38.1	35.1	20.6	31.8	66.5	89	76	66.5	15.7
	20-22	18-19	1039717	1039726	4.38	235	44.5	41.4	23.9	38.1	82.5	102	89	79.5	20.3
	24-26	20-22	1039735	1039744	7.03	268	51	51	28.7	44.5	95.5	114	102	95.5	22.4
	28-30	24-26	1039753	1039762	9.75	300	57	57	31.8	51	105	127	117	105	25.4
	32-35	28	1039771	1039780	14.1	335	63.5	63.5	38.1	57	121	140	127	121	28.7
	38	30-32	1039799	1039806	21.4	384	76	70	41.4	70	133	152	152	137	30.2
	*40-42	33-35	1039815	1039824	24.9	413	76	76	44.5	76	140	165	165	146	33.3
	*44-48	36-40	1039833	1039842	37.2	464	89	89	51	79.5	162	191	178	165	39.6
	*50-54	42-45	1039851	1039860	59	546	102	95.5	57	95.5	187	216	229	178	46
	*56-60	46-48	1039879	1039888	76	597	114	108	36.5	102	210	229	254	197	54
	*64-67	50-54	1041633	1041642	114	648	127	121	73	114	235	248	274	216	60.5
	*70-73	56-62	1041651	1041660	143	692	133	127	79	124	267	279	279	229	73
	*75-80	64-67	1041679	1041688	172	737	146	133	86	133	22	305	287	241	76
	*82-86	70-73	1041697	1041704	197	784	159	140	92	146	302	330	300	254	79
	*88-92	76-80	1041713	1041722	255	845	171	152	98.5	165	314	356	318	274	82.5
	*94-102	-	1041731	1041740	355	921	191	178	108	184	346	381	343	318	89

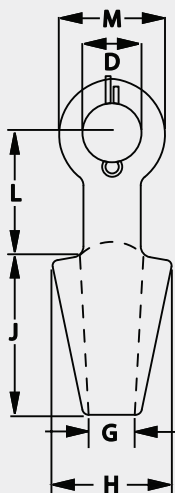


All cast steel sockets 40mm and larger are magnetic particle inspected and ultrasonic inspected
Proof testing available on special order. Drawing illustrates one groove used on sockets 6mm
through to 19mm. Sizes 22mm through to 38mm use 2 grooves. Sizes 40mm and larger use 3
grooves.



Open Spelter Socket



Material: Cast steel
Safety: 5 times
Certificates: 3.1B, manufacturer certificate
Finish: Painted/ galvanized

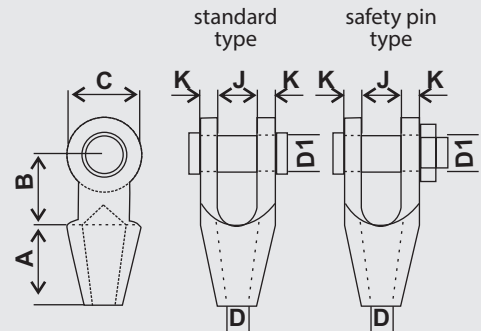

Art.No. Standard	Art. No. Safety pin	Type No.	Wire dia mm	Wire dia Inch	MBL tons	A mm	B mm	C mm	D mm	D1 mm	J mm	K mm	Weight kgs
47007089	47907089	192	6-7	1/4	3	52	40	34	8	18	17	8	0.4
47007109	47907109	194	8-10	3/8	6	58	45	40	11	21	20	11	0.6
47007139	47907139	196	11-13	1/2	12	64	51	49	14	26	25	12	1.3
47007169	47907169	198	14-16	5/8	24	76	64	62	18	30	32	14	2
47001009	47901009	100	18-19	3/4	32	89	76	80	21	35	38	16	4
47001049	47901049	104	20-22	7/8	45	101	89	90	24	41	44	19	5
47001089	47901089	108	23-26	1	70	114	101	120	28	51	51	22	7
47001119	47901119	111	27-30	1 1/8	100	127	114	130	32	57	57	25	12
47001159	47901159	115	31-36	1 1/4 - 1 3/8	125	139	127	144	38	63	63	28	16
47001189	47901189	118	37-39	1 1/2	150	152	162	160	41	70	76	30	24
47001209	47901209	120	40-42	1 5/8	200	165	165	176	44	76	76	33	27
47001259	47901259	125	43-48	1 3/4 - 1 7/8	260	190	178	200	51	89	89	39	38
47001289	47901289	128	49-54	2-2 1/8	280	216	228	216	57	95	101	46	59
47001309	47901309	130	55-60	2 1/4 - 2 3/8	360	228	250	236	63	108	113	53	87
47001329	47901329	132	61-68	2 1/2 - 2 5/8	450	248	273	264	73	121	127	60	130
47001359	47901359	135	69-75	2 3/4 - 2 7/8	480	279	279	276	79	127	133	73	157
47001389	47901389	138	76-80	3-3 1/8	520	305	286	284	86	133	146	76	192
47001409	47901409	140	81-86	3 1/4 - 3 3/8	600	330	298	296	92	140	159	79	243
47001429	47901429	142	87-93	3 1/2 - 3 5/8	700	356	318	340	99	152	171	83	287
47001449	47901449	144	94-102	3 3/4 - 4	875	381	343	362	108	178	191	89	370
47001469	47901469	146	108-115	4 1/2	1100	460	480	440	125	190	208	101	447
47001509	47901509	150	122-130	5	1250	500	500	560	138	250	210	120	750
47001609	47901609	160	140-155	5 1/2 - 6	1400	580	500	600	160	275	230	140	880
47001709	47901709	170	158-167	6 1/2	1600	675	600	650	175	290	310	175	1040




Closed Spelter Socket



G-4153

Material: Cast steel
Safety: 5 times
Certificates: 3.18, manufacturer certificate
Finish: Painted/ galvanized



G-4153


Art.No.	Type No.	Wire dia mm	Wire dia Inch	MBL tons	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight kgs
47008079	290	6-7	1/4	3	51	46	11	8	20	36	13	0.3
47008109	292	8-10	3/8	6	51	52	14	11	24	43	16	0.4
47008139	294	11-13	1/2	12	64	59	18	14	29	51	22	0.8
47008169	296	14-16	5/8	24	77	65	20	18	35	67	25	1.4
47008199	298	18-19	3/4	32	90	75	26	21	42	75	31	2.1
47002019	201	20-22	7/8	45	101	90	33	24	47	92	38	4
47002049	204	23-26	1	70	114	103	36	28	57	104	44	6
47002079	207	27-30	1 1/8	100	127	116	39	32	63	114	51	7
47002129	212	31-36	1 1/4-1 3/8	125	139	130	43	38	70	127	57	11
47002159	215	37-39	1 1/2	150	152	155	51	41	79	136	63	13
47002179	217	40-42	1 5/8	200	165	171	54	44	82	146	70	17
47002199	219	43-48	1 3/4-1 7/8	260	190	198	55	51	89	171	76	24
47002229	222	49-54	2-2 1/8	280	216	224	62	57	96	193	82	37
47002249	224	55-60	2 1/4-2 3/8	360	228	247	73	63	108	216	92	56
47002269	226	61-68	2 1/2-2 5/8	450	248	270	79	73	140	241	102	65
47002279	227	69-75	2 3/4-2 7/8	480	279	286	76	79	159	273	124	93
47002289	228	76-80	3-3 1/8	520	305	298	83	86	171	292	133	110
47002299	229	81-86	3 1/4-3 3/8	600	330	311	102	92	184	311	146	142
47002309	230	87-93	3 1/2-3 5/8	700	356	330	102	99	197	330	159	170
47002319	231	94-102	3 3/4-4	875	381	356	108	108	216	362	178	225
47002339	233	108-115	4 1/2	1100	450	425	120	125	235	405	190	340
47002409	240	122-130	5	1250	500	475	120	138	260	515	205	555
47002509	250	140-155	5 1/2-6	1400	580	550	150	160	300	550	225	850
47002609	260	158-167	6 1/2	1600	675	600	175	175	325	600	300	1050



Closed Body Swivel



Material: High tensile steel
Safety: 5 times
Certificates: 3.1B, manufacturer certificate
Finish: Painted/ galvanized

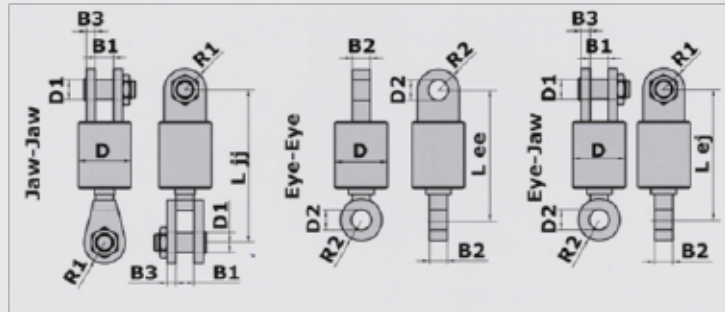

Art.No. jaw/jaw	Art.no. eye/eye	Art.no. eye/jaw	SWL ton	B1 mm	B2 mm	B3 mm	D1 mm	D2 mm	D mm	Ljj mm	Lee mm	Lej mm	R1 mm	R2 mm	Weight kgs
40110017	40115017	40119017	17	65	60	30	63	65	170	480	410	410	70	70	58
40110025	40115025	40119025	25	76	70	30	70	72	190	565	480	480	75	75	85
40110035	40115035	40119035	35	100	80	35	80	82	250	690	585	585	85	85	165
40110055	40115055	40119055	55	110	100	50	100	103	270	800	705	705	105	105	270
40110070	40115070	40119070	70	120	100	50	108	111	290	796	752	752	115	115	315
40110085	40115085	40119085	85	130	125	75	127	130	350	840	815	815	135	135	520
40110120	40115120	40119120	120	155	140	90	152	155	430	893	885	885	170	170	835
40110150	40115150	40119150	150	170	160	100	178	181	470	1003	925	925	190	190	1160
40110200	40115200	40119200	200	175	170	120	190	193	530	1230	1220	1220	220	200	1780
40110250	40115250	40119250	250	200	190	125	250	253	600	1340	1360	1360	260	260	2620
40110300	40115300	40119300	300	250	230	175	290	293	750	1480	1530	1530	300	300	4500




Wire Rope Thimbles



G-411

Hot Dip galvanized steel.
The standard choice for light duty applications and loading conditions.
Meets the performance requirements of EN13411-1:2002.

G-411 meets the performance requirements of Federal Specification FF-T-276b Type II, except for those provisions required of the contractor. For additional information, see page 450.

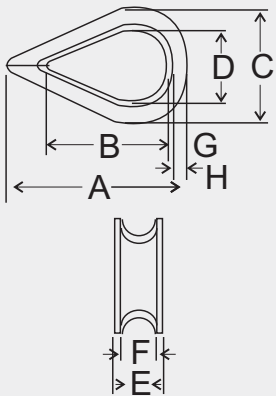

G-411

Rope Dia		G-411 Stoch No	Weight per 100 kg	Dimension mm							
mm	(in.)			A	B	C	D	E	F	G	H
3-4	1/8	1037256	1.59	49.3	33.3	26.9	17.5	6.35	4.05	1.25	3.3
5	3/16	1037274	1.59	49.3	33.3	26.9	17.5	7.85	5.6	1.25	3.3
6-7	1/4	1037292	1.59	49.3	33.3	26.9	17.5	9.65	7.1	1.25	3.3
8	5/16	1037318	1.81	54	38.1	31.8	20.6	11.2	8.65	1.25	3.3
9-10	3/8	1037336	3.04	60.5	41.4	37.3	23.9	13.5	10.4	1.5	4.06
11-13	1/2	1037354	5.67	70	47.8	44.5	28.7	17.5	13.5	2.05	4.83
16	5/8	1037372	15.7	89	57	60.5	35.1	23.1	16.8	3.3	8.64
18-20	3/4	1037390	21.4	95.5	63.5	68.5	41.4	27.4	19.8	3.55	8.64
22	7/8	1037416	38.4	127	89	81	47.8	32.3	23.9	4.05	11.2
24-26	1	1037434	44.2	145	108	95.5	63.5	35.5	26.9	4.05	10.4
28-32	1 1/8-1 1/4	1037452	79	159	114	109	70	70	33.3	5.6	12.7



Wire Lock



**W416-7
Socket Compound**

100% termination efficiency.
Temperature operating range is -65°F to +240°F.
Ideal for onsite applications.
No hazardous molten metal.
Improved fatigue life.
Pouring temperature without boosting pack is 48°F to 110°F.
One booster pack if pouring temperature is 35°F to 48°F.
Two booster packs if pouring temperature is 27°F to 35°F.


Approvals
Lloyds register of shipping
Det Norske Veritas
United States Coast Guard
Registro Italiano Navale
Germanischer Lloyd
United States Navy
American Bureau of Shipping

W416-7 Kits				Booster pack
Kit Size	Kit Size	Stock No.	Weight Each kgs	Stock No.
100	20	1039602	0.28	1039603
250	12	1039604	0.57	1039605
500	12	1039606	1.15	1039607
1000	12	1039608	2.08	1039609
2000	12	1039610	4.08	1039611



Wire Rope Size		Wirelock® Required (cc)	Wire Rope Size	
mm	In.		mm	In.
6-7	1/4	9	44	1-3/4
8	5/16	17	48	1-7/8
9-10	3/8	17	51	2
11	7/16	35	54	2-1/8
13	1/2	35	56	2-1/4
14	9/16	52	60	2-3/8
16	5/8	52	64	2-1/2
20	3/4	86	67	2-5/8
22	7/8	125	70	3
26	1	160	76	2-3/4
28	1-1/8	210	82	3-3/4
32	1-1/4	350	88	3-1/2
36	1-3/8	350	94	3-3/4
40	1-1/2	420	102	4
42	1-5/8	495	-	-

Anchor Lines & A & R Winch Ropes









Anchor Lines

Rope construction:
Class 6x36 IWRC and greater.
Large diameter outer wires for optimum
Resistance to wear and corrosion
Wire protection by galvanizing or ALUMAR.
Compact strand (CMP) for increased
Strength, improved contact area, reduced
tread pressures and sheave wear.


A & R Winch Ropes

Optimum flexibility to allow efficient rope
operation around sheaves, drums and
capstans.
Effective protection of all wires by
galvanising/ALUMAR.
Appropriate lubrication during
manufacture
Rope selection should be determined
through consultation with KISWIRE.




Nominal Rope Diameter		Estimated Rope Mass in air		EEIPS			ALPHA			DELTA			OMEGA		
mm	ins	kg/m	lb/ft	kN	metric tonnes	short tons	kN	metric tonnes	short tons	kN	metric tonnes	short tons	kN	metric tonnes	short tons
Neptune Conventional - Large Diameter Six Strand Rope															
50.8	2	11.3	7.6	1930	197	217	2216	226	249	2285	233	257	2384	243	268
54	2 1/8	12.8	8.6	2160	220	243	2363	241	266	2471	252	278	2578	263	290
57.2	2 1/4	14.3	9.6	2420	247	272	2697	275	303	2834	289	319	2957	302	332
63.5	2 1/2	17.8	11.9	2950	301	332	3295	336	370	3462	353	389	3612	369	406
66.7	2 5/8	19.7	13.2	3240	330	364	3629	370	408	3815	389	429	3980	406	448
69.9	2 3/4	21.4	14.4	3530	360	397	4011	409	451	4207	429	473	4394	448	494
73	2 7/8	23.5	15.8	3840	392	432	4384	447	493	4599	469	517	4805	490	540
76.2	3	25.4	17.1	4170	425	469	4815	491	541	5060	516	569	5276	538	593
79.4	3 1/8	27.6	18.5	4490	458	505	5119	522	575	5374	548	604	5610	572	630
82.6	3 1/4	29.9	20.1	4840	494	544	5462	557	614	5737	585	645	5992	611	673
85.7	3 3/8	32.2	21.6	5180	528	582	5953	607	669	6247	637	702	6531	666	734
88.9	3 1/2	34.8	23.4	5520	563	620	6463	659	726	6786	692	763	7090	723	797
95.3	3 3/4	39.9	26.8	6280	640	706	7002	714	787	7355	750	827	7698	785	865
102	4	45.3	30.5	7060	720	794	7806	796	877	8199	836	922	8554	873	962
108	4 1/4	51.1	34.3	7730	788	869	8287	845	931	8699	887	978	9076	926	1021
114	4 1/2	57.4	38.6	8590	876	966	9209	939	1035	9670	986	1087	10089	1029	1134
Neptune CMP - Large Diameter Six Strand Rope															
50.8	2	12.1	8.1	2141	218	241	2458	251	276	2535	259	285	2575	263	290
54	2 1/8	13.8	9.3	2396	244	269	2621	267	295	2741	280	308	2784	284	313
57.2	2 1/4	15.5	10.4	2684	274	302	2992	305	336	3144	321	353	3193	326	359
63.5	2 1/2	19.1	12.8	3272	334	368	3655	373	411	3840	392	432	3901	398	439
66.7	2 5/8	21.1	14.2	3594	367	404	4025	411	453	4232	432	476	4299	439	483
69.9	2 3/4	23.1	15.5	3916	400	440	4449	454	500	4667	476	525	4742	484	533
73	2 7/8	25.2	16.9	4260	435	479	4863	496	547	5101	521	574	5186	529	583
76.2	3	27.4	18.4	4626	472	520	5341	545	601	5613	573	631	5694	581	640
79.4	3 1/8	29.8	20	4981	508	560	5678	579	639	5961	608	670	6055	618	681
82.6	3 1/4	32.3	21.7	5369	548	604	6059	618	681	6364	649	716	6467	660	727
85.7	3 3/8	34.8	23.4	5746	586	646	6603	674	743	6929	707	779	7049	719	793
88.9	3 1/2	37.6	25.3	6123	625	689	7169	732	806	7527	768	846	7652	781	860
95.3	3 3/4	43	28.9	6966	711	783	7767	793	873	8159	833	917	8308	848	934
102	4	48.9	32.9	7831	799	881	8659	884	974	9095	928	1023	9238	943	1039

Marine Riser Tensioner Lines & Drilling lines





Marine Riser Tensioner Lines

Rope construction:
Flexible constructions (6x41 and 6x49) to achieve optimum fatigue life.
Lang's lay to provide improved wear resistance to rope and sheaves.
Corrosion protection by galvanising or ALUMAR.
The IWRC can be Plastic impregnated to:
Protect the inner small wires
Improve strand support and reduce internal wire stresses
Compact Strand (CMP) offers:
Greater contact area
Reduced tread pressures and sheave wear




Drilling Lines

Rope construction:
6x19 and 6x26 for constructional stability.
Compacted strand (CMP) provides:
Improved spooling on the drawworks
Greater contact area for reduced sheave and groove wear
High resistance to abrasion and pressure
Higher strength
Improved fatigue life



	Nominal Rope Diameter		Estimated Rope Mass in air		EEIPS			ALPHA			DELTA		
	mm	ins	kg/m	lb/ft	kN	metric tonnes	short tons	kN	metric tonnes	short tons	kN	metric tonnes	short tons
Marine Riser Tensioner Lines	Neptune Conventional - Class 6x36 Steel Core												
	1 3/4	1 3/4	8.7	5.83	1360	138.7	153	1500	153	169	1695	173	191
	2	2	11.3	7.61	1760	179.5	198	1930	196.9	217	2216	226	249
	2 1/8	2 1/8	12.8	8.59	1970	200.9	221	2160	220.3	243	2363	241	266
	2 1/4	2 1/4	14.3	9.63	2200	224.4	247	2420	246.8	272	2697	275	303
	2 1/2	2 1/2	17.8	11.95	2682	273.5	301	2950	300.9	332	3295	336	370
	2 5/8	2 5/8	19.6	13.18	2945	300.4	331	3240	330.5	364	3629	370	408
	2 3/4	2 3/4	21.5	14.42	3209	327.3	361	3530	360	397	4011	409	451
	2 7/8	2 7/8	23.5	15.76	3491	356.1	392	3840	391.7	432	4384	447	493
	3	3	25.4	17.1	3782	385.7	425	4160	424.3	468	4815	491	541
	Neptune CMP - Class 6x36 Steel Core												
	44.5	1 3/4	9.2	6	1448	147.6	163	1608	164	181	1812	185	204
	50.8	2	12.1	7.9	1924	196.2	216	2138	218	240	2414	246	271
	54	2 1/8	13.8	9	2180	222.3	245	2422	247	272	2733	279	307
	57.2	2 1/4	15.5	10.1	2436	248.4	274	2707	276	304	3061	312	344
	63.5	2 1/2	19.1	12.4	2974	303.3	334	3305	337	371	3734	381	420
	66.7	2 5/8	21.1	13.7	3257	332.1	366	3619	369	407	4088	417	459
	69.9	2 3/4	23.1	15	3548	361.8	399	3942	402	443	4452	454	500
	73	2 7/8	25.2	16.4	3831	390.6	430	4256	434	478	4814	491	541
	76.2	3	27.4	17.8	4140	422.1	465	4599	469	517	5195	530	584
Drilling Lines	Neptune Conventional - Class 6x19 Steel Core												
	25.4	1	2.8	1.91	460	47	52	506	52	57	575	59	65
	28.6	1 1/8	3.6	2.41	578	59	65	636	65	71	723	74	81
	31.8	1 1/4	4.4	2.98	711	73	80	782	80	88	889	91	100
	34.9	1 3/8	5.3	3.59	854	87	96	943	96	106	1072	109	120
	38.1	1 1/2	6.4	4.28	1010	103	114	1110	113	125	1259	128	142
	41.3	1 5/8	7.5	5.03	1170	119	132	1300	133	146	1471	150	165
	44.5	3/4	8.7	5.83	1360	139	153	1500	153	169	1697	173	191
	47.6	1 7/8	9.9	6.68	1550	158	174	1710	174	192	1932	197	217
	50.8	2	11.3	7.61	1760	180	198	1930	197	217	2216	226	249
	54	2 1/8	12.8	8.59	1970	201	221	2160	220	243	2363	241	266
	57.2	2 1/4	14.3	9.63	2200	224	247	2420	247	272	2697	275	303
	Neptune CMP - Class 6x19 Steel Core												
	25.4	1	3.05	2.05	475	48	53	523	53	59	594	61	67
	28.6	1 1/8	3.79	2.54	597	61	67	657	67	74	747	76	84
	31.8	1 1/4	4.85	3.25	734	75	83	808	82	91	919	94	103
	34.9	1 3/8	5.9	3.96	882	90	99	974	99	109	1108	113	124
	38.1	1 1/2	6.64	4.45	1043	106	117	1147	117	129	1301	133	146
	41.3	1 5/8	7.9	5.3	1211	123	136	1345	137	151	1520	155	171
	44.5	1 3/4	9.2	6.17	1454	148	163	1604	164	180	1812	185	204
	47.6	1 7/8	10.6	7.11	1688	172	190	1862	190	209	2104	215	237
	50.8	2	12.1	8.12	1948	199	219	2136	218	240	2414	246	271
	54	2 1/8	13.7	9.19	2206	225	248	2419	247	272	2733	279	307
	57.2	2 1/4	15.5	10.4	2463	251	277	2709	276	304	3061	325	358
	63.5	2 1/2	19.1	12.82	2974	303	334	3304	337	371	3734	418	461

Large Diameter Crane Ropes & Oil Industry Wire Ropes



Large Diameter Crane Ropes


Appropriate rope constructions to achieve optimum fatigue life.
Where the expected working life is in excess of 1 year, ALUMAR protection is recommended.
Where the expected working life is in excess of 1 year, ALUMAR protection is recommended



Nominal Rope Diameter		Estimated Rope Mass in air		EEIPS			ALPHA			DELTA			Nominal Rope Diameter		
kg/m	lb/ft	kN	metric tonnes	ins	kg/m	lb/ft	kN	metric tonnes	ins	kg/m	lb/ft	kN	metric tonnes	ins	kg/m
Neptune Conventional Rope - Class 6x36 Steel Core															
41.3	1 5/8	7.5	5	1300	133	146	1469	150	165	1547	158	174	1612	164	181
44.5	1 3/4	8.7	5.8	1500	153	169	1695	173	191	1785	182	201	1860	190	209
47.6	1 7/8	9.9	6.7	1710	174	192	1932	197	217	2035	208	229	2120	216	238
50.8	2	11.3	7.6	1930	197	217	2216	226	249	2285	233	257	2381	243	268
54	2 1/8	12.8	8.6	2160	220	243	2363	241	266	2471	252	278	2575	263	289
57.2	2 1/4	14.3	9.6	2420	247	272	2697	275	303	2834	289	319	2953	301	332
63.5	2 1/2	17.8	11.9	2950	301	332	3295	336	370	3462	353	389	3607	368	405
66.7	2 5/8	19.7	13.2	3240	330	364	3629	370	408	3815	389	429	3975	405	447
69.9	2 3/4	21.4	14.4	3530	360	397	4011	409	451	4207	429	473	4394	448	494
73	2 7/8	23.5	15.8	3840	392	432	4384	447	493	4599	469	517	4805	490	540
76.2	3	25.4	17.1	4170	425	469	4815	491	541	5060	516	569	5276	538	593
Neptune CMP - Class 6x36 Steel Core															
41.3	1 5/8	7.9	5.3	1345	137	151	1520	155	171	1601	163	180	1668	170	187
44.5	1 3/4	9.2	6.2	1604	164	181	1812	185	204	1909	195	215	1989	203	224
47.6	1 7/8	10.6	7.1	1862	190	209	2104	215	237	2216	226	249	2309	235	260
50.8	2	12.2	8.2	2136	218	240	2414	246	271	2542	259	286	2649	270	298
54	2 1/8	13.7	9.2	2419	247	272	2733	279	307	2878	293	324	2999	306	337
57.2	2 1/4	15.5	10.4	2709	276	305	3061	312	344	3224	329	362	3359	343	378
63.5	2 1/2	19	12.8	3304	337	371	3734	381	420	3932	401	442	4097	418	461
66.7	2 5/8	21	14.1	3618	369	407	4088	417	460	4306	439	484	4486	457	504

OIL INDUSTRY WIRE ROPES


Drilling Lines 6 x 19 SEAL



Nominal Diameter		Minimum Breaking Force					
		Approximate Mass		IPS Grade		EIPS Grade	
Inches	mm	kg/100m	lb/ft	kN	1000 lb	kN	1000 lb
1/8	22	211	1.42	308	69.2	354	76.6
1	26	275	1.85	399	89.8	460	103.4
1 1/8	29	348	2.34	503	113	578	130
1 1/4	32	430	2.89	617	138.8	711	159.8
1 3/8	35	521	3.5	743	167	854	192
1 1/2	38	619	4.16	880	197.8	1014	228
1 5/8	42	726	4.88	1023	230	1174	264
1 3/4	45	844	5.67	1183	266	1361	306

Stainless Steel Wire Rope

7 x 19



7 x 19 is the most common and versatile construction of stainless steel wire rope. It consists of 7 strands each with 19 wires and is the most flexible and the easiest construction to work with particularly where the rope needs to turn corners, change directions or where ferrule secured thimble eyes and wire rope grips are used. 7 x 19 can be used in either fixed rigging or for limited working rope applications such as on a boat winch




7 x 7



7 x 7 consists of 7 strands each with 7 wires and is not as flexible as 7 x 19. 7 x 7 is an excellent choice for fixed rigging applications such as balustrading and safety barrier rails. Although 7 x 7 is stiffer than 7 x 19 it is still capable of limited angles and can be used with thimble eyes or swage fittings. 7 x 7 has very limited applications as a running or working rope



1 x 19



1 x 19 consists of a single strand with 19 wires. 1 x 19 is very stiff and is suitable for fixed "straight line" rigging only such as mast stays, guy ropes and structural applications. It cannot be used with thimble eyes and is best utilised and looks very effective with machine swaged end fittings



Turnbuckles & Rigging Screws

Turnbuckle



Hook & Hook

Hook & Eye

Eye & Eye

Jaw & Eye

Jaw & Jaw

Hot Dip Galvanised Turnbuckles meet the performance requirements of US Fed FFT-791& ASTM F1145-92 Tested & Certified.



Dia Thread (mm)	Take-up Inch	WLL (tons)	Code Jaw/Jaw	Code Eye/Eye
3/3	6	0.54	WRW0501	WRW0601
	6	1	WRW0502	WRW0602
1/2	9	1	WRW0503	WRW0603
	12	1	WRW0504	WRW0604
5/8	6	1.59	WRW0505	WRW0630
	9	1.59	WRW0506	WRW0605
	12	1.59	WRW0507	WRW0607
3/4	6	2.36	WRW0508	WRW0608
	9	2.36	WRW0509	WRW0609
	12	2.36	WRW0510	WRW0610
	18	2.36	WRW0511	WRW0611
7/8	12	3.27	WRW0512	WRW0612
	18	3.27	WRW0513	WRW0613
	6	4.54	WRW0514	WRW0614
1	12	4.54	WRW0515	WRW0615
	18	4.54	WRW0516	WRW0616
	24	4.54	WRW0517	WRW0617
1¼	12	6.9	WRW0518	WRW0618
	18	6.9	WRW0519	WRW0619
	24	6.9	WRW0520	WRW0620
1½	12	9.71	WRW0521	WRW0621
	18	9.71	WRW0522	WRW0622
	24	9.71	WRW0523	WRW0623
1¾	18	12.7	WRW0524	WRW0624
	24	12.7	WRW0525	WRW0625
2	24	16.78	WRW0526	WRW0626
2½	24	27.22	WRW0527	WRW0627
2¾	24	34.02	WRW0528	WRW0628




Master link & connecting link

Master link




Each link has a Product Identification Code (PIC) for material traceability, along with the size and "CG" (The Crosby Group). * Design Factor of 4 to 1 for chain and 5 to 1 for wire rope.
Alloy Steel - Quenched and Tempered.
Individually Proof Tested at 2.5 times the Working Load Limit(4:1) with certification. * Larger inside width and length for use with thimble.
Engineered Flat for use with S-325 A coupler link.



Size (mm)	A-344 Stock No.	Working Load Limit (1)*		Weight Each (kg)	Dimensions (mm)			Engineered Flat Size For S-325A (in), (mm)
		4:01	5:01		A	B	C	
12	1256862-4	1.6	1.6	0.3	12	60	120	1/4"-5/16", 7-8mm
13	1256932-4	2.12	2.5	0.36	13	60	120	1/4"-5/16", 7-8mm
17	1257002-4	3.15	4	0.84	17	90	160	3/8", 10mm
19	1257072-4	5.3	6.5	1.07	19	90	160	1-2", 13mm
22	1257212-4	8	8	1.61	22	100	180	5/8", 16mm
25	1257282-4	11.2	11.5	2.37	25	115	205	5/8", 16mm
28	1257382-4	13	11.8	3.78	28	145	275	No Flat
31	1257422-4	16	16	4.69	31	145	275	No Flat
36	1257492-4	21.2	24	6.83	36	155	285	No Flat
40	1257532-4	25	25	8.9	40	160	300	No Flat
45	1257562-4	31.5	31.5	12.73	45	180	340	No Flat
51	1257632-4	45	45	17.26	51	215	390	No Flat

LOK-A-LOY® Alloy Connecting Link



Chain Size (in) (mm)	A-1337 Stock No.	Pkg. qty.	Weight Each (kg)	Working Load Limit (t)'	Dimensions					
					A	B	C	D	E	F
9/32	7	1015109	60	0.13	2	8.4	47.8	47	19.8	14.2
5/16	8	1015118	50	0.15	2.5	9.15	55.4	50	23.1	16
3/8	10	1015127	40	0.34	4	11.4	64.3	63.5	26.2	19.1
1/2	13	1015136	12	0.75	6.7	16.3	87.4	81.8	36.6	27.7
5/8	16	1015145	10	1.3	10	19.1	105	96	43.9	35.1
3/4	20	1015154	1	2.26	16	23.6	118	118	53.1	40.4
87/8	22	1015163	1	3.41	19.4	26.9	140	143	58.7	50
1	25	1015172	1	5	27	31	152	157	63.5	56.4
1 1/4	32	1015181	1	9.25	41	38.1	189	194	78.5	64.3

Hooks



Clevis Sling Hook
A- 339N



Clevis Sling Hook
S- 314A



Clevis Grab Hook
A- 338



Clevis Hooks
S- 317A



Eye Grab Hook
A- 328



Eye Sling Hook
A- 327



Eye Hoist Hook
S- 320AN



Shur-Loc Eye Hook
S- 316A



Swivel Hook
S- 322A



Swivel Hook
S- 326A



Plate Lifting Clamps



UNIVERSAL - FOR LIFTING
IN ANY DIRECTION
MODEL IPU 10



UNIVERSAL - FOR LIFTING
IN ANY DIRECTION
MODEL IP 10



FOR STAINLESS STEEL
AND VERY HARD
MATERIALS (HARDOX)
MODEL IPU 10/S



FOR HORIZONTAL LIFTING
AND TRANSFER
MODEL IPHTONZ
MODEL IPHSZ




FOR THE TRANSFER OF
STEEL
BEAMS AND ATTACHMENT OF
TACKLE EYE MODEL IPTK



FOR THE LIFTING AND
TRANSFER
OF STEEL DRUMS MODEL IPVK

Manual & Multi- Purpose Marine Winch

MARINE WINCH

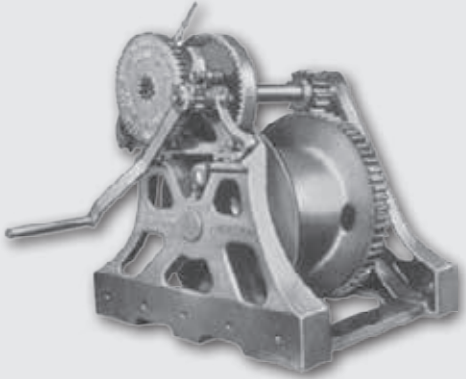

We can Supply the following winch types suited for a number of applications.

Winch Types: - Electric

- Hydraulic
- Pneumatic
- Applications:

Applications:

- Anchor Handling
- 4-Point Mooring Systems
- Towing
- Anchor Handling & Towing
- Ramp operations



Our winches can also be designed with a tension monitoring and control system, auto-spool or any controls that are required by the user.

For further details on blocks, sheaves and pulleys, please contact your nearest sales office.

CAPSTAN



Capstans are used for safe and efficient hauling in of the mooring lines with the use of a messenger line and can be supplied Integrally mounted at the mooring hook unit or as Freestanding type.

The capstans can have several features such as braking device, motor-starter, footswitch, reversible rotation, etc.

EDC Capstans are designed and optimized using the latest design and analysis Software's

We can also custom manufacture to customer requirement and specifications.



Snatch Block

Snatch Block

New Improved Light Champion



418

Forged alloy heat treated hooks.
 Forged steel swivel tees, yokes and shackles.
 Hook and Shackle assemblies on 114mm through 356mm sizes can be interchanged. * Can be furnished with bronze bushings or roller bearings.
 Opening feature permits insertion of rope while block is suspended from gin-pole.
 76mm thru 457mm 418 and 419 blocks have exclusive bolt retaining spring to assure no lost bolts. Can be furnished with hook latch.
 Pressure lube fittings.
 76mm - 25mm features dual rated wire line sheaves. * Fatigue rated



419

Sheave Diameter	Bearing Code	418 with Hook	Stock No. 419 with Shackle	404 Tail Board	Wire Rope Size (*mm)	Working Load Limit '(l)	416 with Hook	Weight Each (kg) 419 with Shackle	404 Tail Board	Rep. Sheave Stock No.	Rep. Latch Stock No.
*76.0	BB		109091		8-10	2		1.9		2023196	
"76.0	BB	108038	109037+	102016	8-10	2	2.04	1.81	1.22	2023196	1096421
**114	BB	108065	109064	102025	10-13	4	5.31	5.44	2.99	2023183	1096468
152	BB	108127	109126	102098	16-19	8	12.2	12.6	6.8	2023137	1096562
152	RB	108154	109153	102114	16-19	8	12.2	12.6	6.8	2023143	1096562
203	BB	108225	109224	102169	16-19	8	15	15.4	9.53	2023153	1096562
203	RB	108252	109251	102187	16-19	8	15	15.4	9.53	2023163	1096562
254	BB	108323	109322	102230	16-19	8	18.6	19.1	13.2	2023174	1096562
254	RB	108350	109359	102258	16-19	8	18.6	19.1	13.2	2023181	1096562
305	BB	169169	202961	178890	16	8	21.8	22.2	16.3	2023227	1096562
305	RB	199911	169347	178934	16	8	21.8	22.2	16.3	2023248	1096562
305	BB	108421	109420	102301	19	8	21.8	22.2	16.3	2023235	1096562
305	RB	108458	109457	102329	19	8	21.8	22.2	16.3	2023236	1096562
356	BB	194920	169356		16	8	24.9	25.4		2028377	1096562
356	RB	199948	167857		16	8	24.9	25.4		2026445	1096562
356	BB	108528	109527		19	8	24.9	25.4		2028378	1096562
356	RB	108546	109545		19	8	24.9	25.4		2026444	1096562
406	BB	199975	203041		19	15	59	61		2023694	1096609
406	RB	200008	203087		19	15	59	61		2023702	1096609
406	BB	108608	109607		22	15	59	61		2023690	1096609
406	RB	108626	109625		22	15	59	61		2023698	1096609
457	BB	200099	203130		22	15	68	70		2023718	1096609
457	RB	200151	203176		22	15	68	70		2023728	1096609
457	BB	108644	109643		26	15	68	70		2023709	1096609


May be furnished in other wire rope sizes
 + Ultimate Load is 4 times the Working Load Limit.
 ** Available in Bronze Bushed only .76 and 114mm have self-lubricating Bronze Bushing. + Fitted with 1-1/4" (32mm) ID Swivel Eye.
 ++ May be furnished in other rope size.
 Note: When ordering, please specify: size, block number, hook or shackle, bronze busted or roller bearing, and wire rope size



404

Cable Laid Sling & Cable Laid Grommet

CABLE LAID SLING

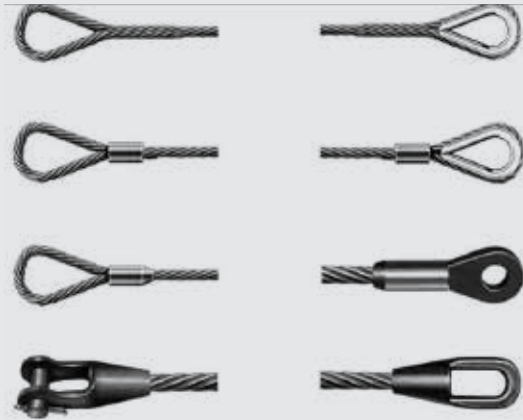

Heavy Lift Cable Laid Slings and Grommet could meet clients request on PM20, EN 13414_3 or IMCA M179 specifications.

CABLE LAID GROMMET (ENDLESS TYPE)



Nominal Rope Diameter		Outer-Core Rope		Calculated Breaking Load	Approx. Mass Weight
MM	INCH	MM	INCH	M/TON	KG/METER
1100	4	32	36	445	31.6
1114	4 1/2	36	42	575	40.5
1120	4 3/4	38	44	650	48
1124	5	40	44	732	53
1132	5 1/2	42	48	788	58
1138	5 3/4	44	50	916	61
1150	6	48	54	1075	73
1162	6 1/2	52	58	1214	85
1176	7	56	64	1515	98
1187	7 1/2	60	67	1677	112
2200	8	64	72	1841	133
2222	8 3/4	71	80	2224	162
2239	9 1/2	76	87	2626	185
2250	10	80	90	2810	208
2283	11	90	103	3483	262
3321	12 1/2	103	115	4524	350
3358	13 1/2	115	128	6131	403

Nominal Rope Diameter		Unit rope dio	Approx. Mass Weight per single part	Calculated breaking load On two parts
MM	INCH	MM	M/TON	KG/METER
60	2 1/4	20	285	13
66	2 1/2	22	357	16
72	2 3/4	24	418	20
78	3	26	488	20
84	3 1/4	28	550	26
90	3 1/2	30	650	30
96	3 3/4	32	734	33
108	4 1/4	36	938	43
114	4 1/2	38	1050	49
120	4 3/4	40	1200	52
126	5	42	1275	59
132	5 1/4	44	1500	62
144	5 3/4	48	1774	75
150	6	50	1938	82
156	6 1/4	52	2009	88
162	6 1/2	54	2254	92
168	6 3/4	56	2500	101
180	7	60	2794	120
192	7 1/2	64	3070	138
213	8 1/2	71	3672	172
231	9	77	4335	193
240	9 1/2	80	4660	216
270	10 1/2	90	5742	268
309	12	103	1344	355
345	13 1/2	115	10200	445

Max Wire Rope Sling & Gator - Rex Sling



This is the latest high performance nine-part wire rope sling from SlingmaX® Inc. Its efficiencies are over 90%, meaning a rigger can get a lighter Cotor-Rex' sling with the same capacity as traditional nine-part slings. This sling features a hand-tuck body. It will develop its full strength on small pins with a Did ratio of 1: 1 where D is the pin diameter and d is the sling body diameter.

This is the strongest multi-part sling with great flexibility. It will develop its full strength on small pins with a Did ratio of 1: 1 where D is the pin and d is the sling body. (4: 1 Did when comparing the pin to the component parts.) For heavy lifting work this is the most efficient wire rope sling) that meets all of the standards. The eyes have the wire ropes (12) laid in parallel so that there is no cross over and then they are wrapped with heavy duty material to keep them in position. This sling was developed to meet conditions specified by the US Navy and the Wire Rope Technical Board Sling Manual. Testing has proven it to be the strongest multi-part wire rope sling when attached to small pins because it has twelve parts of wire rope in the loop in a parallel construction.



COMPONENT PARTS	FIN DIA	Eye size	APPROXIMATE WT./FT.	VERTICAL RC(tons)	CHOKER RC(tons)	BASKET RC(tons)	MINIMUM LENGTH FEET
7/16"	1 3/4"	22"	3.15	16.5	12.4	33.0	10.5
1/2"	2"	4"	4.14	21.5	16.1	43.0	12.2
9/16"	2 1/4"	26"	5.31	27.2	20.04	54.4	14.0
5/8"	2 1/2"	28"	6.48	33.4	25.1	66.8	15.0
3/4"	3"	30"	9.36	47.6	35.7	95.2	17.5
7/8"	3 1/2"	35"	12.78	64.5	48.4	129.0	19.0
1"	4"	40"	16.65	83.8	62.9	167.6	21.5
1 1/8"	4 1/2"	45"	21.06	105.3	79.0	210.6	27.5
1 1/4"	5"	50"	26.01	129.4	97.1	258.8	31.0
1 3/8"	5 1/2"	55"	31.50	155.5	116.6	311.0	34.5
1 1/2"	6"	60"	37.44	184.7	138.5	369.4	37.5
1 3/4"	7"	70"	51.03	247.9	185.9	495.8	44.5
2"	8"	80"	66.51	320.8	240.6	641.6	48.0
2 1/4"	9"	90"	84.24	400.1	300.1	800.2	55.0
2 1/2"	10"	100"	104.40	489.2	366.9	978.4	62.0

GATOR-MAXTM AND GATOR-LAID® SLINGS

FIN.	COMPONENT	STD.	VERTICAL	CHOKER	BASKET	WDG
DIA.	PARTS	Eye size	RC(TONS)	RC(TONS)	RC(TONS)	Per FT.
1/2 "	1/8 "	8"	1.4	0.95	2.7	0.26
5/8 "	3/16 "	10"	1.8	1.4	3.6	0.4
3/4 "	5/32 "	12"	2.7	2	5.5	0.59
7/8 "	7/32 "	14"	3.7	2.7	7.4	0.77
1 "	1/4 "	16"	4.8	3.6	9.7	0.99
1 1/4 "	5/16 "	18"	7.4	5.5	14.7	1.56
1 1/2 "	3/8 "	20"	10.5	7.9	21	2.19
1 3/4 "	7/16 "	22"	14	11	29	3.15
2 "	1/2 "	24"	19	14	38	4.14
2 1/4 "	9/16 "	26"	24	19	48	5.31
2 1/2 "	5/8 "	28"	29	22	58	6.48
3 "	3/4 "	30"	42	31	83	9.36
3 1/2 "	7/8 "	35"	56	42	112	12.78
4 "	1 "	40"	74	55	146	16.65
4 1/2 "	1 1/8 "	45"	92	69	184	21.06
5 "	1 1/4 "	50"	113	85	227	26.01
5 1/2 "	1 3/8 "	55"	137	102	273	31.5
6 "	1 1/2 "	60"	162	121	323	37.44
7 "	1 3/4 "	70"	216	162	432	51.03
8 "	2 "	80"	280	210	560	66.51
9 "	2 1/4 "	90"	350	261	700	84.24
10 "	2 1/2 "	100"	428	321	856	104

Gator - Flex Grommets - Wire Rope Slings



Wire rope slings upto 71mm (2-3/4 inch) in diameter. Our modern factory in Dubai includes the following equipment:
1500 tonne swaging machine 800 tonne swaging machine
200 tonne tensile testing machine 50 tonne tensile testing machine 30 tonne vertical testing machine Wire rope reeling machine etc.

Our slings meet local and international performance standards and our technical staff can design a sling to suit your applications.



Ultra flexible slings for that short heavy lift connection. These slings can be made shorter than standard multi-part slings, but maintain all of the advantages. They are the most flexible grommets in the world.

GATOR-FLEX® G-9MMETS (Old = 5:1). RATED CAPACITY AT 5:1 OF

PIN SIZE	9 PTS.	CAPACITIES IN TONS			WT. per FOOT
		VERTICAL	CHOKER	BASKET	
5 x FD	WIRE ROPE				
1"	1/4 "	10	7	20	2
1 1/4 "	5/16 "	15	11	30	3
1 1/2 "	3/8 "	22	15	44	5
1 3/4 "	7/16 "	29	21	58	6
2"	1/2 "	38	27	76	8
2 1/4 "	9/16 "	48	34	96	11
2 1/2 "	5/8 "	59	42	118	13
3"	3/4 "	85	59	170	19
3 1/2 "	7/8 "	115	81	230	25
4"	1"	148	104	296	33
4 1/2 "	1 1/8 "	187	131	374	42
5"	1 1/4 "	230	161	460	52
5 1/2 "	1 3/8 "	276	194	552	63
6"	1 1/2 "	328	230	656	75
7"	1 3/4 "	441	308	882	102
8"	2"	570	399	1140	133
9"	2 1/4 "	711	498	1422	168
10"	2 1/2 "	870	609	1740	209
11"	2 3/4 "	1040	728	2080	250
12"	3"	1224	857	2448	300



Flat Polyester Webbing Slings

FLAT POLYESTER WEBBING SLINGS



A wide range of Flat Webbing Slings made with high tenacity polyester webbing.
Slings are manufactured either to EN 1492-1 :2000 with Safety Factor 7: 1 or to BS 3481 :PT2-1983 with Safety Factor of 6:1
We offer slings in MM system (i.e, 30mm, 60mm, 90mm etc.) and also in Inch system (i.e, 1 " . 2" . 3" etc)

Capacity Chart in KGS for 1-PLY and 2-PLY Flat Polyester Webbing Slings

Color Code	Width In Inches	M=1		M=0.8		M=2		M= 1.4 □=-45		M=1 □=45 -60	
		Straight Lift= %100		Choker Lift - 80%		Basket/U-Lift - 200%		At angle Beta - 140%		At angle Beta - 100%	
		1-PLY	2 -PLY	1-PLY	2 -PLY	1-PLY	2 -PLY	1-PLY	2 -PLY	1-PLY	2 -PLY
Violet	1	500	1000	400	800	1000	2000	700	1400	500	1000
Green	2	1000	2000	800	1600	2000	4000	1400	2800	1000	2000
Yellow	3	1500	3000	1200	2400	3000	6000	2100	4200	1500	3000
Grey	4	2000	4000	1600	3200	4000	8000	2800	5600	2000	4000
Red	5	2500	5000	2000	4000	5000	10000	3500	7000	2500	5000
Brown	6	3000	6000	2400	4800	6000	12000	4200	8400	3000	6000
Blue	8	4000	8000	3200	6400	8000	16000	5600	11200	4000	8000
orange	10	5000	10000	4000	8000	10000	20000	7000	14000	5000	10000
Orange	12	6000	12000	4800	9600	12000	24000	8400	16800	6000	12000

Capacity Chart in KGS for 1-PLY and 2-PLY Flat Polyester Webbing Slings

Color Code	Width In Inches	M=1		M=0.8		M=2		M= 1.4 □=-45		M=1 □=45 -60	
		Straight Lift= %100		Choker Lift - 80%		Basket/U-Lift - 200%		At angle Beta - 140%		At angle Beta - 100%	
		3-PLY	4 -PLY	3-PLY	4 -PLY	3-PLY	4 -PLY	3-PLY	4 -PLY	3-PLY	4 -PLY
Violet	1	1500	2000	1200	1600	3000	4000	2100	2800	1500	2000
Green	2	3000	4000	2400	3200	6000	8000	4200	5600	3000	4000
Yellow	3	4500	6000	3600	4800	9000	12000	6300	8400	4500	6000
Grey	4	6000	8000	4800	6400	12000	16000	8400	11200	6000	8000
Red	5	7500	10000	6000	8000	15000	20000	10500	14000	7500	10000
Brown	6	9000	12000	7200	9600	18000	24000	12600	16800	9000	12000
Blue	8	12000	16000	9600	12800	24000	32000	16800	22400	12000	16000
orange	10	15000	20000	12000	16000	30000	40000	21000	28000	15000	20000
Orange	12	18000	24000	14400	19200	36000	48000	25200	33600	18000	24000

Nylon Rope

Nylon Rope

Nylon rope exceeds twice the strength of Manila rope. It has high elongation (under load) when compared to other synthetic ropes. Nylon has high energy absorption under shock and good abrasion resistance. When combined, these characteristics makes nylon rope the best in handing compared to other synthetics. It's utilized extensively in marine use such as mooring lines, towing slings, commercial fishing, utility rope, leisure boat, sailing etc.




DIA		CIR		WT		B/S	
mm	Inch	Inch	Kgs/100m	Lbs/100ft	Lbs/100fm	kg	kN
4	5/32	1/2	1.05	0.71	4.23	360	3.53
5	3/16	5/8	1.56	1.05	6.29	570	5.60
6	1/4	3/4	2.25	1.51	9.07	760	7.46
7	9/32	7/8	3.10	2.08	12.50	1,050	10.30
8	5/16	1	4.00	2.69	16.13	1,390	13.65
9	3/8	1,1/8	5.00	3.36	20.16	1,750	17.20
10	13/32	1,1/4	6.20	4.17	25.00	2,130	20.90
11	7/16	1,3/8	7.50	5.04	30.24	2,600	25.50
12	15/32	1,1/2	8.90	5.98	35.88	3,040	29.80
13	1/2	1,5/8	10.50	7.06	42.33	3,570	35.00
14	9/16	1,3/4	12.20	8.20	49.19	4,180	41.00
16	5/8	2	15.80	10.62	63.70	5,380	52.80
18	23/32	2,1/4	20.00	13.44	80.64	6,880	67.50
19	3/4	2,3/8	22.10	14.85	89.10	7,650	75.10
20	13/16	2,1/2	24.50	16.46	98.78	8,450	82.90
22	7/8	2,3/4	30.00	20.16	120.96	10,400	102.00
24	15/16	3	35.50	23.86	143.13	12,300	120.70
25	1	3,1/8	38.80	26.07	156.44	13,400	131.50
26	1,1/32	3,1/4	42.00	28.22	169.34	14,500	142.50
28	1,1/8	3,1/2	48.50	32.59	195.54	16,200	159.00
30	1,3/16	3,3/4	55.50	37.29	223.77	18,300	179.50
32	1,1/4	4	63.00	42.33	254.01	20,600	202.00
34	1,11/32	4,1/4	71.40	47.98	287.87	23,200	227.50
36	1,7/16	4,1/2	80.00	53.76	322.55	25,700	252.10
38	1,1/2	4,3/4	89.30	60.01	360.04	28,200	276.60
40	1,19/32	5	99.00	66.53	399.15	31,000	304.10
42	1,21/32	5,1/4	109.00	73.25	439.47	33,800	331.60
44	1,3/4	5,1/2	120.00	80.64	483.82	37,000	363.00
45	1,13/16	5,5/8	124.80	83.86	503.17	37,800	370.80
48	1,7/8	6	142.00	95.42	572.52	43,000	421.80
50	2	6,1/4	153.50	103.15	618.89	46,300	454.20
52	2,1/16	6,1/2	166.00	111.55	669.28	50,000	490.50
55	2,5/32	6,7/8	186.20	125.12	750.73	55,000	539.50
56	2,1/4	7	193.00	129.69	778.14	57,000	559.50
60	2,3/8	7,1/2	221.00	148.51	891.04	64,500	632.70
64	2,1/2	8	252.00	169.34	1,016.02	73,000	716.10
65	2,9/16	8,1/16	260.00	174.71	1,048.28	75,000	735.70
70	2,3/4	8,11/16	302.00	202.94	1,217.61	86,000	843.60
72	2,7/8	9	319.00	214.36	1,286.16	91,000	892.70
75	3	9,1/4	346.00	232.50	1,395.01	98,700	968.20
80	3,5/32	10	394.00	264.76	1,588.54	111,500	1,093.80
85	3,3/8	10,1/2	445.00	299.03	1,794.17	126,000	1,236.00
88	3,7/16	11	477.00	320.53	1,923.19	135,000	1,324.30
90	3,9/16	11,1/8	499.00	335.31	2,011.89	139,000	1,363.60
95	3,3/4	11,3/4	556.00	373.62	2,241.70	154,000	1,510.70
96	3,13/16	12	568.00	381.68	2,290.08	158,000	1,550.00
100	3,15/16	12,3/8	616.00	413.94	2,483.61	170,000	1,667.70

Polypropylene Rope

Polypropylene Rope

Polypropylene rope has nearly twice the strength of Manila rope when compared size to size. The rope has positive buoyancy (floats) and doesn't absorb water, rot or decay. It's resistant to acid, alkali, and most chemicals. When not in use the rope should be stored away from direct sun-ray.

Recommended usages are mooring, dock and anchor line, boat life-line, tarpaulin line, tent tiedown, pool barrier line, public utility and general use in home, farm and industry.

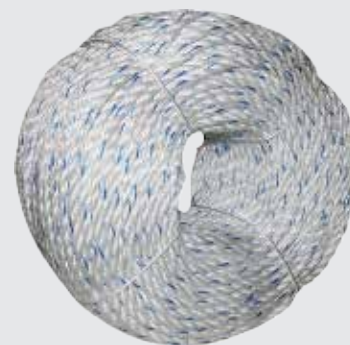

DIA		CIR		WT		B/S	
mm	Inch	Inch	Kgs/100m	Lbs/100ft	Lbs/100fm	kg	kN
4	5/32	1/2	0.6	0.40	2.42	200	2.1
5	3/16	5/8	1.2	0.81	4.84	420	4.1
6	1/4	3/4	1.7	1.14	6.85	600	5.9
7	9/32	7/8	2.3	1.55	9.27	820	8.0
8	5/16	1	3.0	2.02	12.10	1,100	10.4
9	3/8	1,1/8	3.7	2.49	14.92	1,300	12.4
10	13/32	1,1/4	4.5	3.02	18.14	1,600	15.3
11	7/16	1,3/8	5.5	3.70	22.18	1,900	18.2
12	15/32	1,1/2	6.5	4.37	26.21	2,200	21.7
13	1/2	1,5/8	7.8	5.24	31.45	2,600	25.8
14	9/16	1,3/4	9.0	6.05	36.29	3,000	29.9
16	5/8	2	11.5	7.73	46.37	3,800	37.0
18	23/32	2,1/4	14.8	9.95	59.67	4,800	47.2
19	3/4	2,3/8	16.2	10.89	65.32	5,200	51.4
20	13/16	2,1/2	18.0	12.10	72.57	5,800	56.9
22	7/8	2,3/4	22.0	14.78	88.70	7,000	68.2
24	15/16	3	26.0	17.47	104.83	8,100	79.7
25	1	3,1/8	28.2	18.95	113.70	8,700	85.3
26	1,1/32	3,1/4	30.5	20.50	122.97	9,400	92.2
28	1,1/8	3,1/2	35.5	23.86	143.13	10,700	104.9
30	1,3/16	3,3/4	40.5	27.21	163.29	12,200	119.8
32	1,1/4	4	46.0	30.91	185.46	13,500	132.3
34	1,11/32	4,1/4	52.2	35.08	210.46	15,100	148.0
36	1,7/16	4,1/2	58.5	39.31	235.86	16,900	165.9
38	1,1/2	4,3/4	65.0	43.68	262.07	18,500	181.4
40	1,19/32	5	72.0	48.38	290.29	20,500	201.0
42	1,21/32	5,1/4	80.1	53.82	322.95	22,400	220.0
44	1,3/4	5,1/2	88.0	59.13	354.80	24,600	241.5
45	1,13/16	5,5/8	91.4	61.42	368.51	25,100	246.4
48	1,7/8	6	104.0	69.89	419.31	28,600	280.4
50	2	6,1/4	112.8	75.80	454.79	30,500	300.0
52	2,1/16	6,1/2	122.0	81.98	491.88	33,000	324.5
55	2,5/32	6,7/8	137.0	92.06	552.36	36,500	357.9
56	2,1/4	7	142.0	95.42	572.52	37,800	371.0
60	2,3/8	7,1/2	163.0	109.53	657.19	43,200	424.2
64	2,1/2	8	185.0	124.31	745.89	48,900	480.0
65	2,9/16	8,1/16	191.0	128.35	770.08	50,400	491.2
70	2,3/4	8,11/16	221.2	148.64	891.84	58,000	569.7
72	2,7/8	9	234.0	157.24	943.45	61,400	602.7
75	3	9,1/4	254.9	171.29	1,027.71	66,400	651.5
80	3,5/32	10	290.0	194.87	1,169.23	75,600	741.3
85	3,3/8	10,1/2	327.0	220.07	1,320.43	84,600	830.0
88	3,15/32	11	351.0	235.86	1,415.17	90,700	889.5
90	3,9/16	11,1/8	367.0	246.61	1,479.68	94,000	922.6
95	3,3/4	11,3/4	408.4	274.43	1,646.60	104,800	1028.0
96	3,13/16	12	417.0	280.21	1,681.28	107,000	1050.0
100	3,15/16	12,3/8	452.5	304.07	1,824.41	116,100	1139.0

Manila Rope

Manila Rope

These Natural ropes are manufactured from selected high and medium grade fibers. They suit the demands of the oil industry, shipping, construction, agriculture, and in the manufacture of Bio-Plastics.

Class 1 Manila is a high grade general purpose rope best suited for jobs where economy, strength, and durability are necessary. It has great resistance from mildew and agricultural deterioration. If you're looking for the strongest natural fiber rope, look no further and contact us.




Circumference		Diameter (Approximate)		Per 30 meters (Per 100 feet)		Per 220 meters (Per 720 feet)		Minimum Tensile Strength	
in	mm	in	mm	lb.	kg	lb.	kg	lb.	kg
5/8	18	3/18	5	1.50	0.68	10.8	4.9	405	184
3/4	10	1/4	6	2.00	0.91	14.4	6.5	540	245
1	25	5/16	8	2.90	1.31	20.0	9.5	900	408
1-1/8	28	3/8	9	4.10	1.86	20.5	13.4	1,215	551
1-1/4	32	7/16	10	5.25	2.38	37.8	17.1	1,575	714
1-1/2	38	1/2	12	7.50	3.40	54.0	24.5	2,385	1082
1-3/4	44	9/16	14	10.42	4.72	75.0	34.0	3,105	1408
2	51	5/8	16	13.33	6.05	06.0	43.5	3,080	1,796
2-1/4	57	3/4	18	16.67	7.56	120.0	54.4	4,860	2204
2-1/2	63	13/16	20	19.50	8.85	140.4	63.7	5,850	2,654
2-3/4	70	7/8	22	22.50	10.21	162.0	73.5	8,030	3,143
3	76	1	24	27.00	12.25	194.4	88.2	8,100	3674
3-1/4	82	1-1/16	26	31.25	14.17	225.0	102.1	0,450	4,286
3-1/2	80	1-1/8	28	36.00	16.33	259.2	117.6	10,800	4899
3-3/4	05	1-1/4	30	41.83	18.98	301.2	136.6	12,150	5511
4	101	1-5/16	32	48.00	21.77	345.6	156.8	13,500	6,124
4-1/2	114	1-1/2	36	60.00	27.22	432.0	196.0	16,650	7552
5	127	1-5/8	40	74.42	33.76	535.8	243.0	20,250	9185
5-1/2	130	1-3/4	44	89.42	40.56	643.8	292.0	23,850	10,818
6	152	2	48	107.50	48.76	774.0	351.1	27,900	12,655
7	178	2-1/4	56	146.00	66.23	1051.2	476.8	36,000	16738
8	203	2-5/8	64	190.83	86.56	1374.0	623.2	46,800	21,228
0	228	3	72	241.67	109.62	1740.0	789.3	57,600	26127
10	254	3-1/4	80	299.17	135.70	2154.0	977.0	60,300	31,434
11	270	3-5/8	88	366.67	166.32	2640.0	1197.5	81,900	37150
12	305	4	96	436.00	197.77	3139.2	1423.9	94,500	42865

Pure Manila Ropes, 3-strand, Regular Lay Conforms with British Standard Specification 2052: 1989, Grade 1

in	mm	in	mm	lb.	kg	lb.	kg	lb.	kg
5/8	16	3/16	5	1.2	0.55	8.7	4.0	430	195
7/8	22	1/4	7	2.4	1.07	17.0	7.7	820	310
1	25	5/16	8	3.7	1.67	26.5	12.0	1,200	545
1-1/4	32	7/16	10	4.6	2.08	33.0	15.0	1,555	705
1-1/2	38	112	12	7.1	3.21	50.9	23.1	2,340	1,060
1-3/4	44	0116	14	9.4	4.28	67.9	30.8	3,190	1,450
2	51	5/8	16	12.8	5.81	02.2	41.8	4,475	2,030
2-1/4	57	314	18	14.8	6.72	106.7	48.4	5,380	2,440
2-1/2	63	13/16	20	18.5	8.40	133.4	60.5	7,170	3,250
2-3/4	70	7/8	22	22.2	10.08	160.1	72.6	8,500	3,860
3	76	1	24	26.0	12.20	194.0	88.0	10,075	4,570
3-1/4	82	1-1/16	26	31.7	14.36	228.0	103.4	11,780	5,340
3-1/2	88	1-1/8	28	35.8	16.25	258.0	117.0	13,440	6,100
3-3/4	85	1-1/4	30	42.2	19.16	304.2	138.0	15,130	6,860
4	101	1-5/16	32	47.2	21.39	338.5	154.0	17,420	7,900
4-1/2	114	1-1/2	36	~.0	27.19	431.7	195.8	21,270	9,650
5	127	1-5/8	40	74.1	33.60	533.5	242.0	26,300	11,900
5-1/2	138	1-3/4	••	SO.3	40.94	648.8	294.8	31,470	14,200
6	152	2	48	106.8	48.43	768.7	348.7	36,870	16,800
6-1/2	165	2-1/8	52	126.0	57.14	807.0	411.4	43,160	19600
7	178	2-1/4	56	144.8	65.69	1042.8	473.0	49,460	22,400
7-1/2	190	2-1/2	60	167.1	75.78	1202.8	545.6	55,875	25,400
8	203	2-5/8	64	194.0	88.00	1396.8	633.6	63,840	29,000
8	228	3	72	243.9	110.61	1755.7	796.4	78,900	35,800
10	254	3-1/4	80	286.4	134.44	2134.1	968.0	95,770	43,500
11	278	3-5/8	88	360	163.47	2594.8	1177.0	113,520	51,500
12	305	4	96	431	195.56	3104.1	1408.0	132,180	60,000
13	330	4-1/4	104	485	220.00	3492.1	1584.0	154,320	70,000
14	356	4-1/2	112	586	265.83	4219.6	1914.0	178,570	81,000
15	381	5	120	674	305.56	4850.1	2200.0	105,030	93,000


Eye Types, Eye Styles, Flat Endless Slings, Special Purpose Slings

EYE TYPES

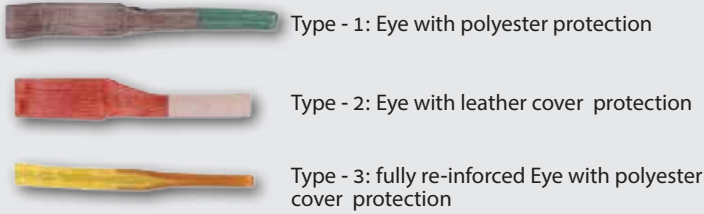

An eye cover forms an effective barrier between the lifting point and the load-bearing portion of the webbing sling in the eye resulting in improved safety and longer life. Unless specifically instructed by the customer, we can offer all slings with Type 1: Polyester Protected Eyes as shown below.

EYE STYLES

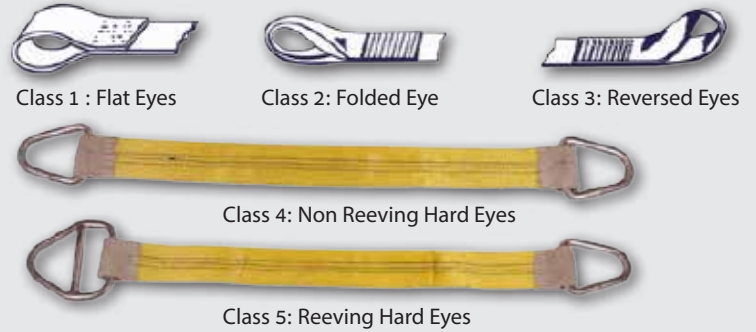

Unless specifically instructed by the customer all slings are made with Class 2: Folded eyes.

FLAT ENDLESS SLINGS



These are manufactured from a single thickness webbing sewn in a continuous loop with an overlap. These slings are mainly used when a wide grip is required on large equipment, ego for lifting pipes. These slings have the sample capacity as double ply flat webbing slings.




SPECIAL PURPOSE SLINGS



Pipe Laying sling



Extra wide webbing sling for wide-bodied loads



Cargo Net (mesh size as per customer requirement)



We can offer special purpose slings as per customer requirements. Some of these are illustrated above.

G-Link™ Synthetic Sling Connector

G-Link



PRODUCT FEATURES:

Couples web, round or Twin-Path™ slings with hardware (oblongs or hooks).
 Splices two slings into longer length.
 Connects two slings with oblong and two hooks into bridle sling.
 Allows sling to be used as sliding choker sling.
 Two G-Link™ connectors used together will double the rated capacity of one G-Link™ connector.
 Conforms with ASME B30.9 web and round sling specifications.
 Shortens sling reach

SPECIFICATIONS:

MODEL NUMBER	VERT. RATED CAP. TONS	CHOKER RATED CAP. TONS	SLING SIZE (IN.)	WGT (LBS.)
SC200L	2 1/2	2	2	2
SC300L	5	3	3	3 1/2
SC400L	7 1/2	4	4	7
SC500L	15	8	5	15
SC600L	25	12	6	29

Can fail if damaged, misused or overloaded. Inspect before use. Use only if trained. Observe rated capacity. DEATH or INJURY can occur from improper use or maintenance.



Connect Hook or Oblong to Sling



Choker Sling



Connect Two Slings


Chain Saddle Ring



System	Chain Size Inches	Single Branch Sling 90 degree loading	Double Sling			Chain Size Inches	Triple and Quadruple Sling		
			60°	45°	30°		60°	45°	30°
10	9/32	4,300	7,400	6,100	4,300	9/32	11,200	9,100	6,450
10	3/8	8,800	15,200	12,400	8,800	3/8	22,800	18,600	13,200
10	1/2	15,000	26,000	21,200	15,000	1/2	39,000	31,800	22,500
10	5/8	22,600	39,100	32,000	22,600	5/8	58,700	47,900	33,900
10	3/4	35,300	61,100	49,900	35,300	3/4	91,700	74,900	53,000
10	7/8	42,700	74,000	60,400	42,700	7/8	110,900	90,600	64,000
8	1	47,700	82,600	67,400	47,700	1	123,900	101,200	71,500
8	1-1/4	72,300	125,200	102,200	72,300	1-1/4	187,800	153,400	108,400
8	1-1/2	80,000	138,600	113,100	80,000	1-1/2	--	--	--

Grade 10 Short Link Chain & Load Cell

Grade 10 Short Link Chain

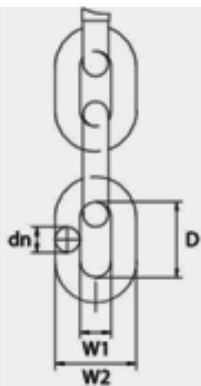

Chain Dia mm	D mm	W1 mm	WLL kgs	Weight kgs/each	Drum Length	Code
7	2/1/2002	9	2000	1.1	100	WRS1002
8	5	10.8	2500	1.4	100	WRS1003
10	7-1/2~	13	4000	2.2	100	WRS1004
13	15	16.9	6700	3.8	100	WRS1005
16	25	20.8	10000	5.7	50	WRS1006

Grade 10 Short Link Chain

Part Number RLP250KG RLP500KG RLP1T RLP2T5 RLP5T RLP12T RLP25T RLP50T RLP100T RLP200T RLP250T

Capacity	250kg	500kg	1000kg	2.5t	5t	12t	25t	50t	100t	200t	250t
Resolution	0.05kg	0.1kg	0.5kg	0.001t	0.001t	0.002t	0.005t	0.01t	0.05t	0.1t	0.1t
Units	kg	kg	kg	t	t	t	t	t	t	t	t
Weight	1.5kg	1.5kg	1.5kg	1.5kg	2.2kg	3.5kg	5.2kg	10.9kg	37kg	80kg	80kg
Safety Factor	50:01:00	25:01:00	12:01	5:01	5:01	5:01	5:01	5:01	4:01	5:01	4:01
Battery Type	Handheld - 2 x AA Alkaline / Loadcell 4 x AA Alkaline										
Battery Life	Handheld - 400 hours / Loadcell 850 hours continuous										
DisplayType	digit 8.8mm LCD3.5kg 7										
Op Temp	to 50ct -10										
Accuracy	of applied load 0.3% ±										
Frequency	2.4GHz										
Range	metres 100										
Data Rate	Update per second 1										
Protection	IP65										
Dimension A	204	204	204	204	249	305	340	424	608	690	
Dimension B	43	43	43	43	43	47	60	75	99	150	
Dimension C	101	101	101	101	101	101	110	163	255	305	
Dimension D	146	146	146	146	165	193	215	230	320	350	
Dimension E	24.5	24.5	24.5	24.5	38	47.5	55	76	108	125	
Dimension F	47.5	47.5	47.5	47.5	66						
Dimension G	19	19	19	19	32						
Crosby Shackle	G210	G210	G210	G210	G210	G210	G210	G210	G2140	G2140	





Load Cell

Loadlink with 100 metres range supplied with easy to use two button handheld with push button control for tare and on/off Radiolink is fitted with standard alkaline batteries and has no external antenna. Calibrated in kg or tonnes, other units are available on request. May also be connected to a PC using our 'Desktop Controller' software package. All models are supplied with carry/storage case.

Cast Steel Danforth High Holding Power Anchor Delta High Holding Power Anchor



Cast Steel Danforth High Holding Power Anchor



Weight Kg	A mm	B mm	C mm	D mm	E mm	F mm	G mm
136	1830	1240	280	935	870	590	30
227	1600	1380	320	1050	970	660	35
340	1720	1480	370	1129	1040	720	40
454	1830	1580	410	1206	1110	760	45
908	2110	1820	530	1391	1270	910	65
1360	2390	2260	600	1641	1500	990	75
1815	2640	2500	660	1815	1660	1050	75
2268	2840	2700	710	1957	1790	1150	90
2721	3000	2860	760	2060	1880	1210	100
3175	3120	2960	790	2165	1970	1260	100
3628	3280	3120	830	2270	2060	1320	100
4535	3510	3220	890	2435	2210	1420	115
9070	4360	4140	1110	2920	2620	1770	140
13605	5320	4760	1280	3390	3040	2040	160
18141	5590	5205	1410	3520	3330	2245	180



Delta High Holding Power Anchor



Weight Kg	A mm	C mm	C mm	D mm
500	725	1500	570	1200
1000	2605	1960	740	1560
1500	2660	2250	840	1800
2000	2960	2470	930	2000
2500	3150	2660	1005	2130
3000	3380	2830	1070	2285
3500	3550	3000	1120	2400
4000	3790	3180	1190	2560
5000	3945	3300	1260	2660
6000	4250	3560	1345	2870
7000	4440	3750	1405	2995
7500	4565	3850	1435	3080
9000	4925	4130	1550	3320
10000	5040	4270	1600	3400
12000	5335	4530	1705	3600
13500	5535	4670	1765	3730
15000	5735	4845	1830	3875
18000	6110	5165	1935	4120
20000	6405	5410	2110	4320

Parachute Liftbag & Liftbag

Parachute Liftbag

A hybrid of the parachute and totally enclosed range is the closed bottom parachute lifting bag. This type suffixed with TE would be suited for situations where the lift is in shallow water, perhaps fast current, and where lift and tow is required. These lift bags can be used as an open bottomed liftbag by removing the 4" cap from the base.

This type of liftbag range from the 1,000 Kg to the 50,000 Kg with a safe working load of 6:1.

All liftbags are supplied ready for use with test certificates and logbook. All Parachute liftbags are fitted with an inverter line attachment point which is clearly labelled.



Weight Kg	Overall Height	Overall Dia	Approx Folded Dimensions m./dia x m./l	Large Dump Valve	% Inch Inlet Assembly	Over-Pressure Relief Valves (2PS.I.)	Net weight
Kg 1000	M 2.38	1.30M	x0.80 0.35	Yes	Yes	Yes	Kg 16.5
Kg 1500	M 2.86	1.30M	x0.82 0.38	Yes	Yes	Yes	Kg 18.5
Kg 2000	M 3.02	M 1.40	x0.85 0.40	Yes	Yes	Yes	Kg 22.0
Kg 3000	M 3.95	1.50M	x 1.15 0.45	Yes	Yes	Yes	Kg 41.5
Kg 4000	M 4.00	1.75M	0.45x1.2	Yes	Yes	Yes	Kg 45.0
Kg 5000	M 4.25	M 2.20	x1.30 0.5	Yes	Yes	Yes	Kg 51.0
10000kg	M 4.85	M 2.76	x 1.30 0.55	Yes	Yes	Yes	Kg 98.5
20000Kg	M 5.60	M 3.67	x 1.30 0.70	Yes	Yes	Yes	Kg 150
35000Kg	6.46M	4.16M	x 1.30 0.90	Yes	Yes	Yes	Kg 250
50000Kg	7.50M	M 5.00	x 1.30 1.00	Yes	Yes	Yes	Kg 300

Liftbag



Weight Kg	Overall Height	Overall Dia	Overall Height	Shackle Pick Up Points	% Inch Inlet Valve	Approx Folded Dimensions m./dia x m./l	Net weight
Kg 1000	M 1.85	M 1.00	M 1.15	2	2	x 1.18 0.35	Kg 23.0
Kg 2000	M 2.30	M 1.23	M 1.38	3	2	x 1.04 0.40	Kg 40.5
Kg 3000	M 2.65	M 1.43	M 1.58	3	2	x 1.15 0.45	Kg 49.0
Kg 5000	M 3.76	M 1.43	M 1.58	5	2	x 1.30 0.50	Kg 77.0
Kg 6000	M 4.42	M 1.43	M 1.58	5	2	x 1.32 0.50	Kg 85.0
Kg 10000	M 3.93	M 1.91	M 2.08	6	2	x 1.30 0.60	Kg 126.0
Kg 15000	M 4.65	M 2.42	M 2.59	7	2	x 1.30 0.65	Kg 146.0
Kg 20000	M 5.65	M 2.42	M 2.59	7	2	x 1.30 0.75	Kg 166.0
Kg 25000	M 5.65	M 2.55	M 2.72	7	2	x 1.60 0.70	Kg 228.0
Kg 30000	M 6.14	M 2.70	M 2.90	6	2	x 1.60 0.80	Kg 290.0
Kg 35000	M 6.20	M 2.90	M 3.10	6	2	x 1.60 0.85	Kg 320.0
Kg 50000	M 8.00	M 2.90	M 3.10	9	2	x 1.60 0.90	Kg 350.0

The liftbags range from the 1,000 Kg to the 50,000 Kg with a safe working load of 6: 1. Each bag has heavy duty webbing straps, anchor points, shackles, air inlet/outlet valves and air relief valves. All liftbags are supplied ready for use with test certificates and logbook.