



Cuplock Scaffolding System & Accessories

Support Standards

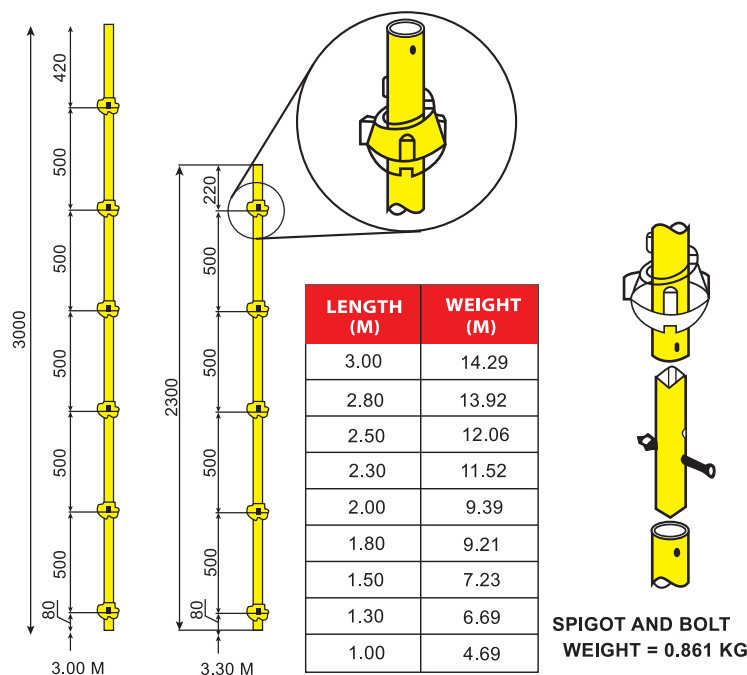

There are three sizes of spigotless support standards. This range of standard caters to all soffit heights used either in conjunction with 1m , 2M and 3M Spigotted standards or as independent units. The spigotless designn allows the insertion of jacks with various adaptors or forkheads to meet the requirements of differing support application. Made from standard scaffolding tube , it has top cup and bottom cup welded at 500mm centers for a 4-way connection of ledgers.


Support ledgers:

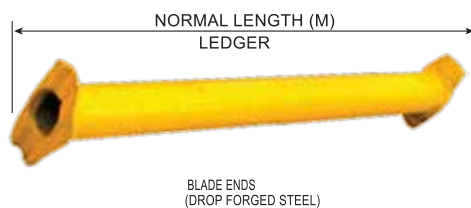

The system utilizes the basic components for access or support combined with a carefully selected range of other components to meet various demands of grids used in the support formwork. Specific sixes of ledgers are available to suit grid dimensions for the applications given in the table.these can be used for either access or support work.

NOMINAL LENGTH (M)	WEIGHT (KG)	NOMINAL LENGTH (M)	WEIGHT (KG)
2.50	8.49	0.90	3.34
1.80	6.21	0.60	2.34
1.60	5.57	SPECIAL SIZES	
1.30	4.60		
1.20	4.29	3.00	10.20
1.00	3.65	1.50	5.26

ADJUSTABLE JACKS:

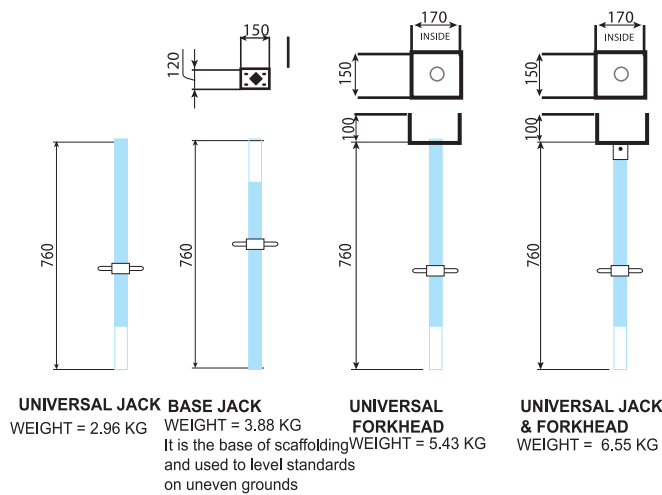

The 500mm screw jacks provides a method of jacking which can be used at either top or bottom of a scaffold structure which accepts a load of upto 57kN.