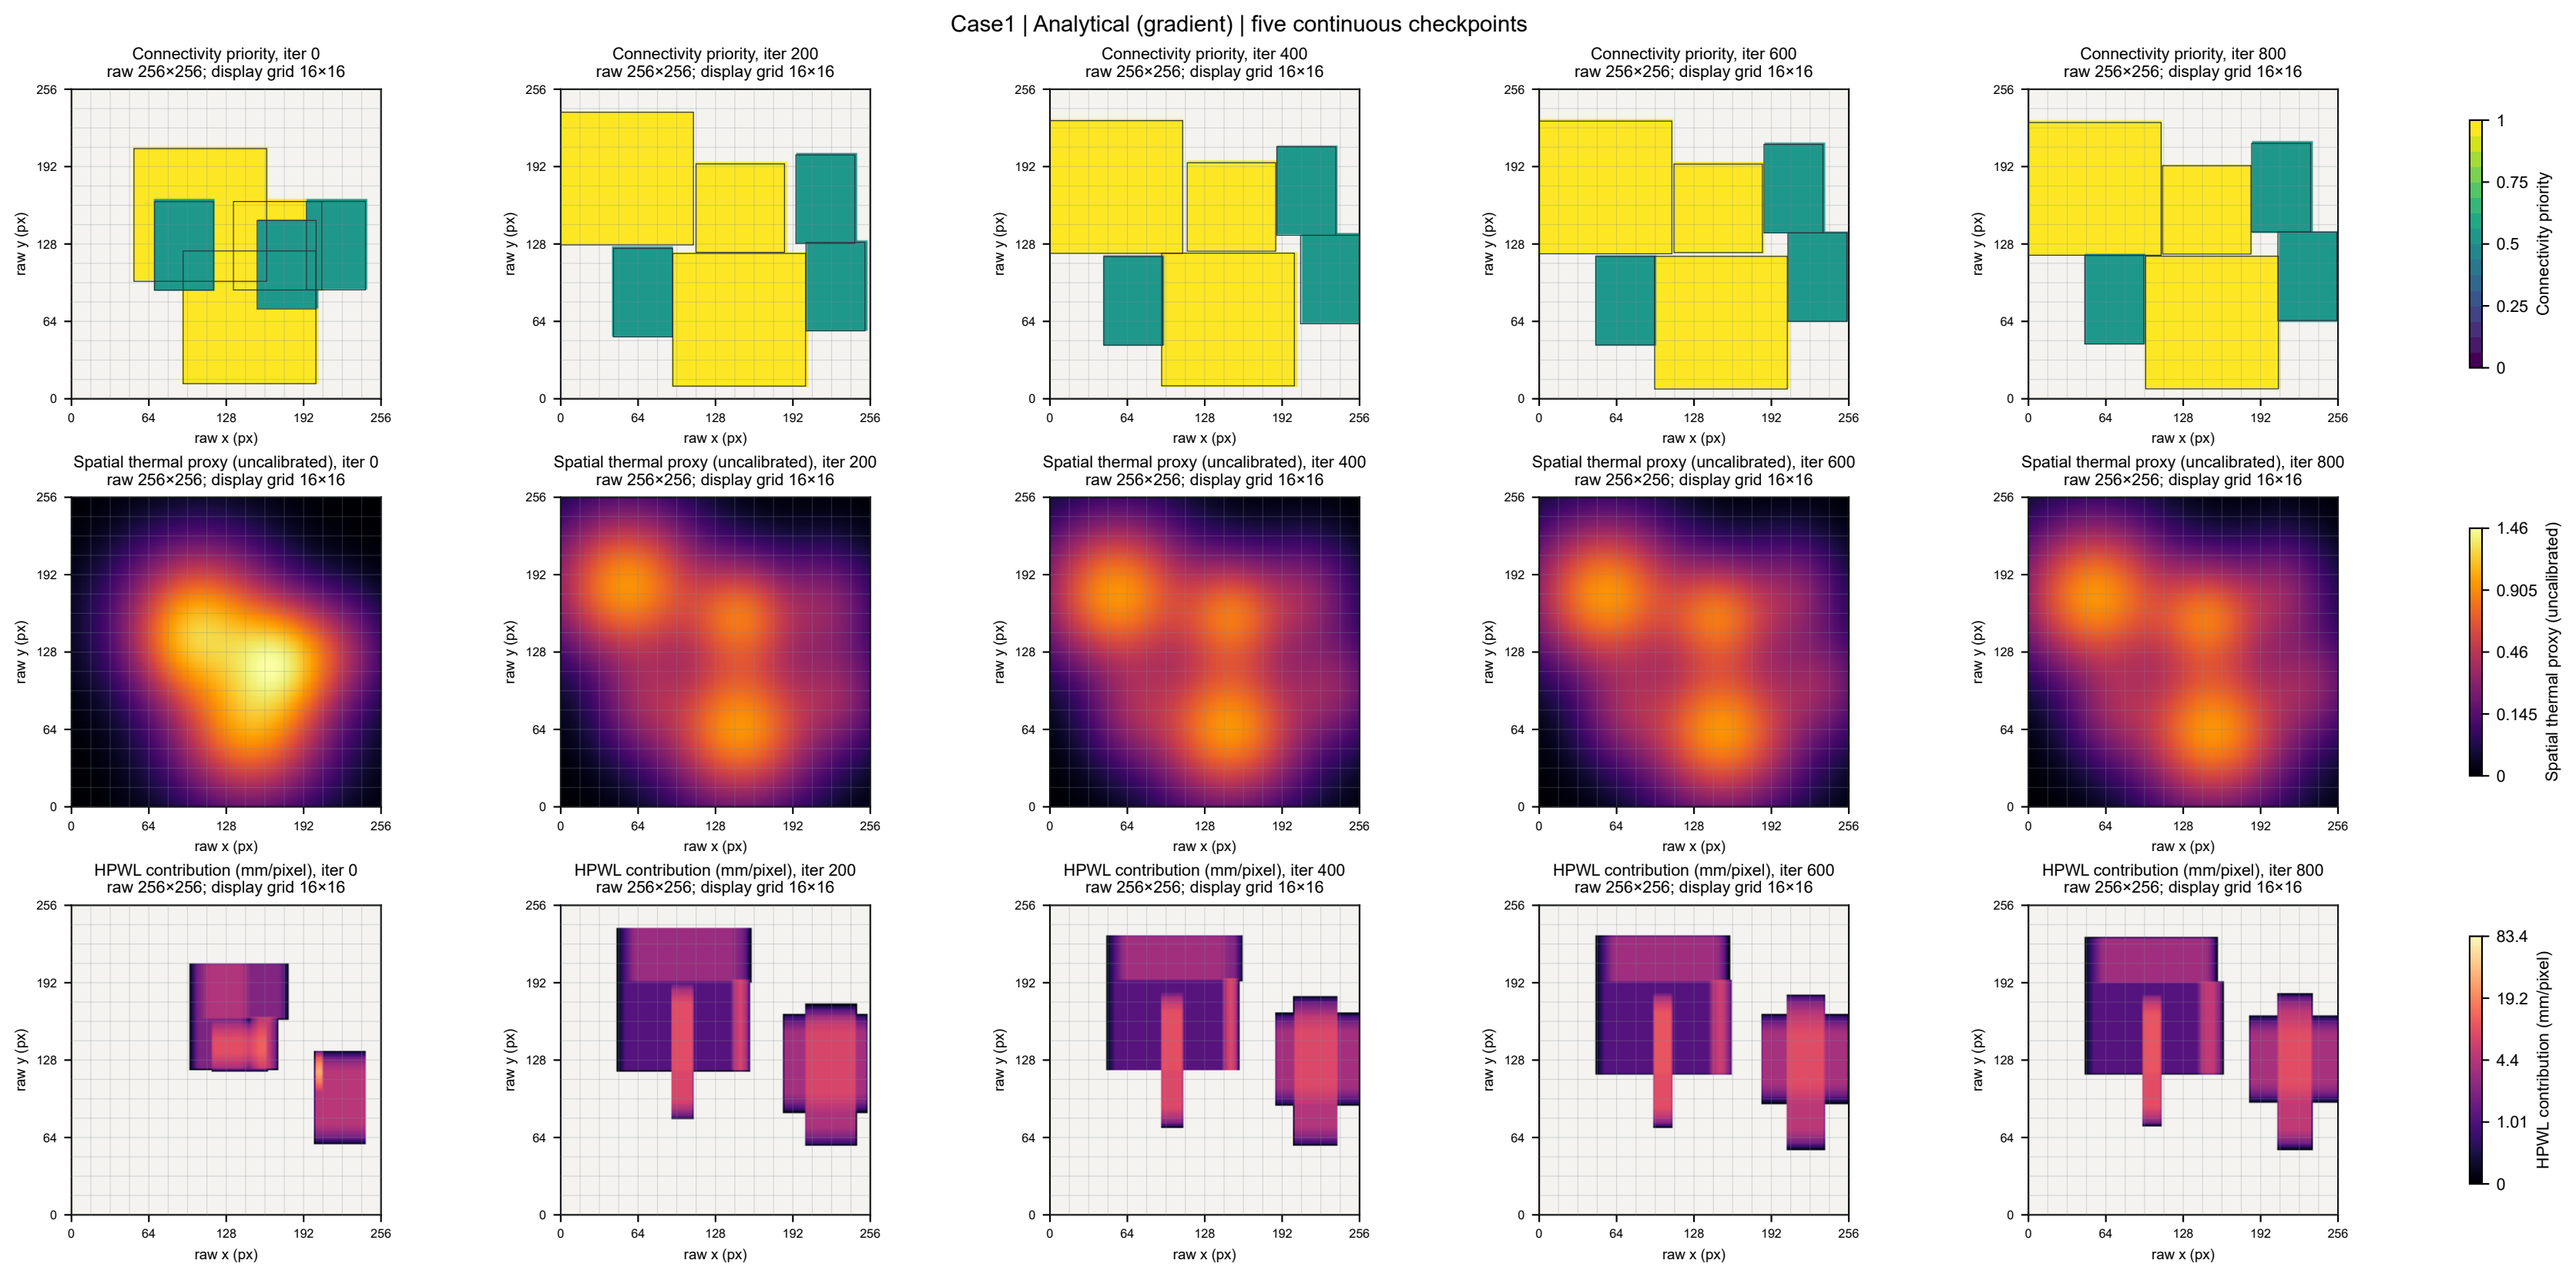

Case1 | Analytical (gradient) | five continuous checkpoints
Connectivity priority, iter 0
raw 256×256; display grid 16×16
Connectivity priority, iter 200
raw 256×256; display grid 16×16
Connectivity priority, iter 400
raw 256×256; display grid 16×16
Connectivity priority, iter 600
raw 256×256; display grid 16×16
Connectivity priority, iter 800
raw 256×256; display grid 16×16
Spatial thermal proxy (uncalibrated), iter 0
raw 256×256; display grid 16×16
Spatial thermal proxy (uncalibrated), iter 200
raw 256×256; display grid 16×16
Spatial thermal proxy (uncalibrated), iter 400
raw 256×256; display grid 16×16
Spatial thermal proxy (uncalibrated), iter 600
raw 256×256; display grid 16×16
Spatial thermal proxy (uncalibrated), iter 800
raw 256×256; display grid 16×16
HPWL contribution (mm/pixel), iter 0
raw 256×256; display grid 16×16
HPWL contribution (mm/pixel), iter 200
raw 256×256; display grid 16×16
HPWL contribution (mm/pixel), iter 400
raw 256×256; display grid 16×16
HPWL contribution (mm/pixel), iter 600
raw 256×256; display grid 16×16
HPWL contribution (mm/pixel), iter 800
raw 256×256; display grid 16×16
raw x (px)
raw y (px)
0
64
128
192
256
Connectivity priority
1
0.75
0.5
0.25
0
Spatial thermal proxy (uncalibrated)
1.46
0.905
0.46
0.145
0
HPWL contribution (mm/pixel)
83.4
19.2
4.4
1.01
0