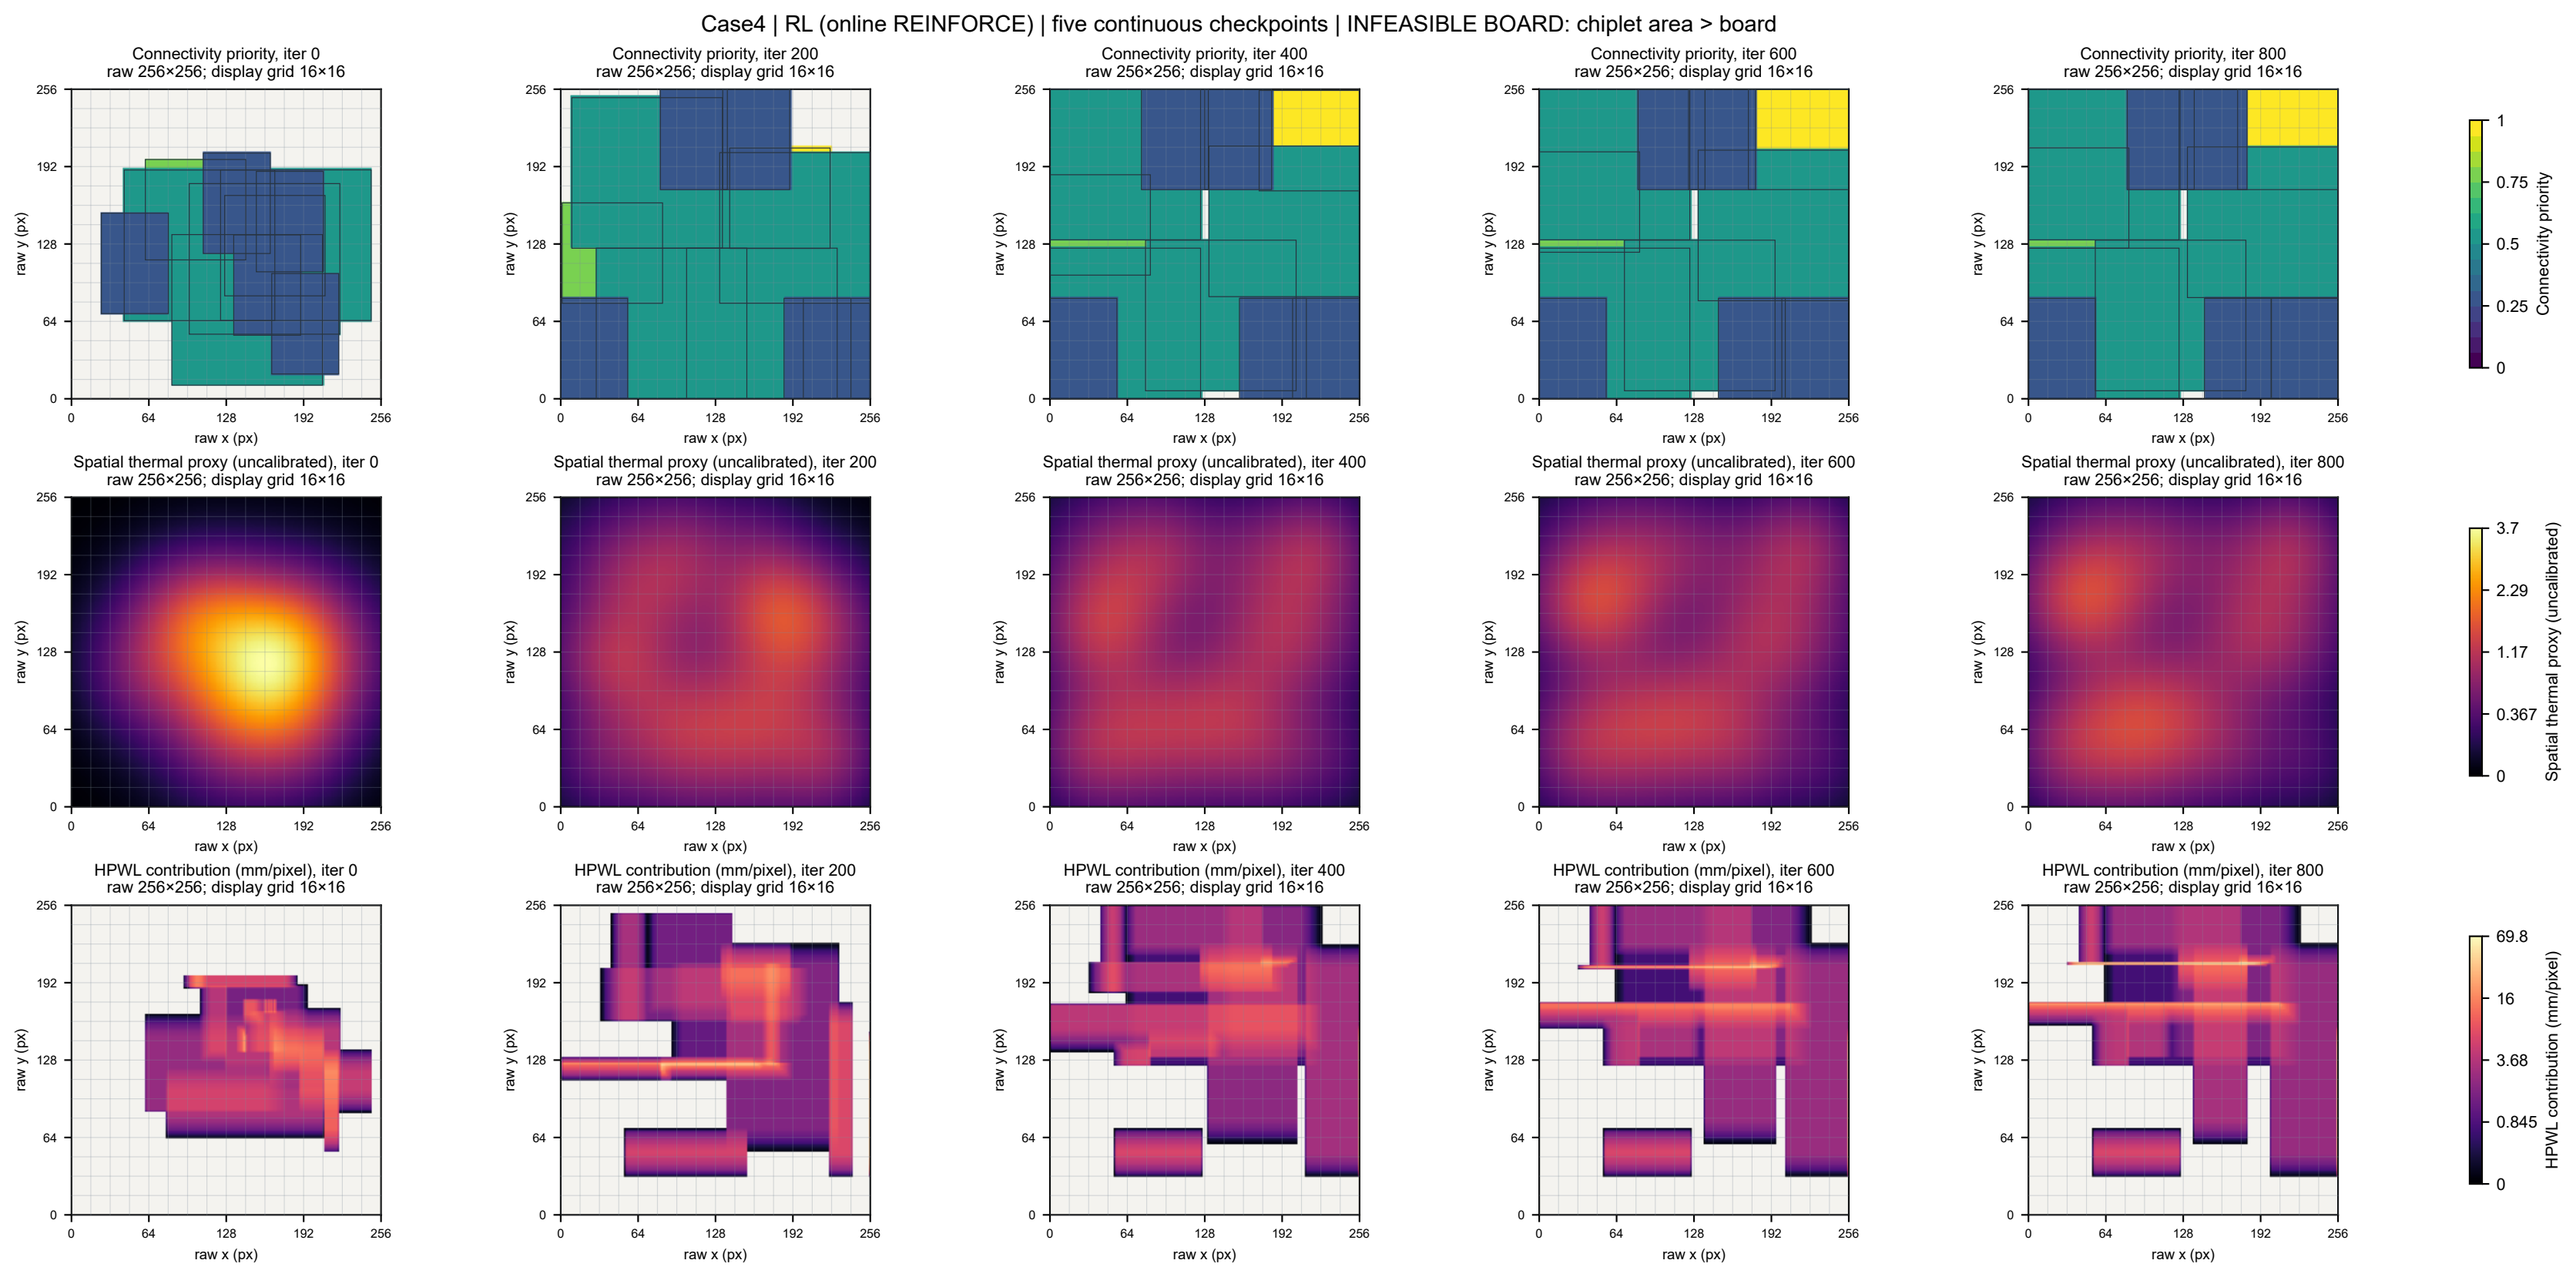

Case4 | RL (online REINFORCE) | five continuous checkpoints | INFEASIBLE BOARD: chiplet area > board
Connectivity priority, iter 0
raw 256×256; display grid 16×16
Connectivity priority, iter 200
raw 256×256; display grid 16×16
Connectivity priority, iter 400
raw 256×256; display grid 16×16
Connectivity priority, iter 600
raw 256×256; display grid 16×16
Connectivity priority, iter 800
raw 256×256; display grid 16×16
Connectivity priority
1
0.75
0.5
0.25
0
Spatial thermal proxy (uncalibrated), iter 0
raw 256×256; display grid 16×16
Spatial thermal proxy (uncalibrated), iter 200
raw 256×256; display grid 16×16
Spatial thermal proxy (uncalibrated), iter 400
raw 256×256; display grid 16×16
Spatial thermal proxy (uncalibrated), iter 600
raw 256×256; display grid 16×16
Spatial thermal proxy (uncalibrated), iter 800
raw 256×256; display grid 16×16
Spatial thermal proxy (uncalibrated)
3.7
2.29
1.17
0.367
0
HPWL contribution (mm/pixel), iter 0
raw 256×256; display grid 16×16
HPWL contribution (mm/pixel), iter 200
raw 256×256; display grid 16×16
HPWL contribution (mm/pixel), iter 400
raw 256×256; display grid 16×16
HPWL contribution (mm/pixel), iter 600
raw 256×256; display grid 16×16
HPWL contribution (mm/pixel), iter 800
raw 256×256; display grid 16×16
HPWL contribution (mm/pixel)
69.8
16
3.68
0.845
0
raw x (px)
raw y (px)
0
64
128
192
256