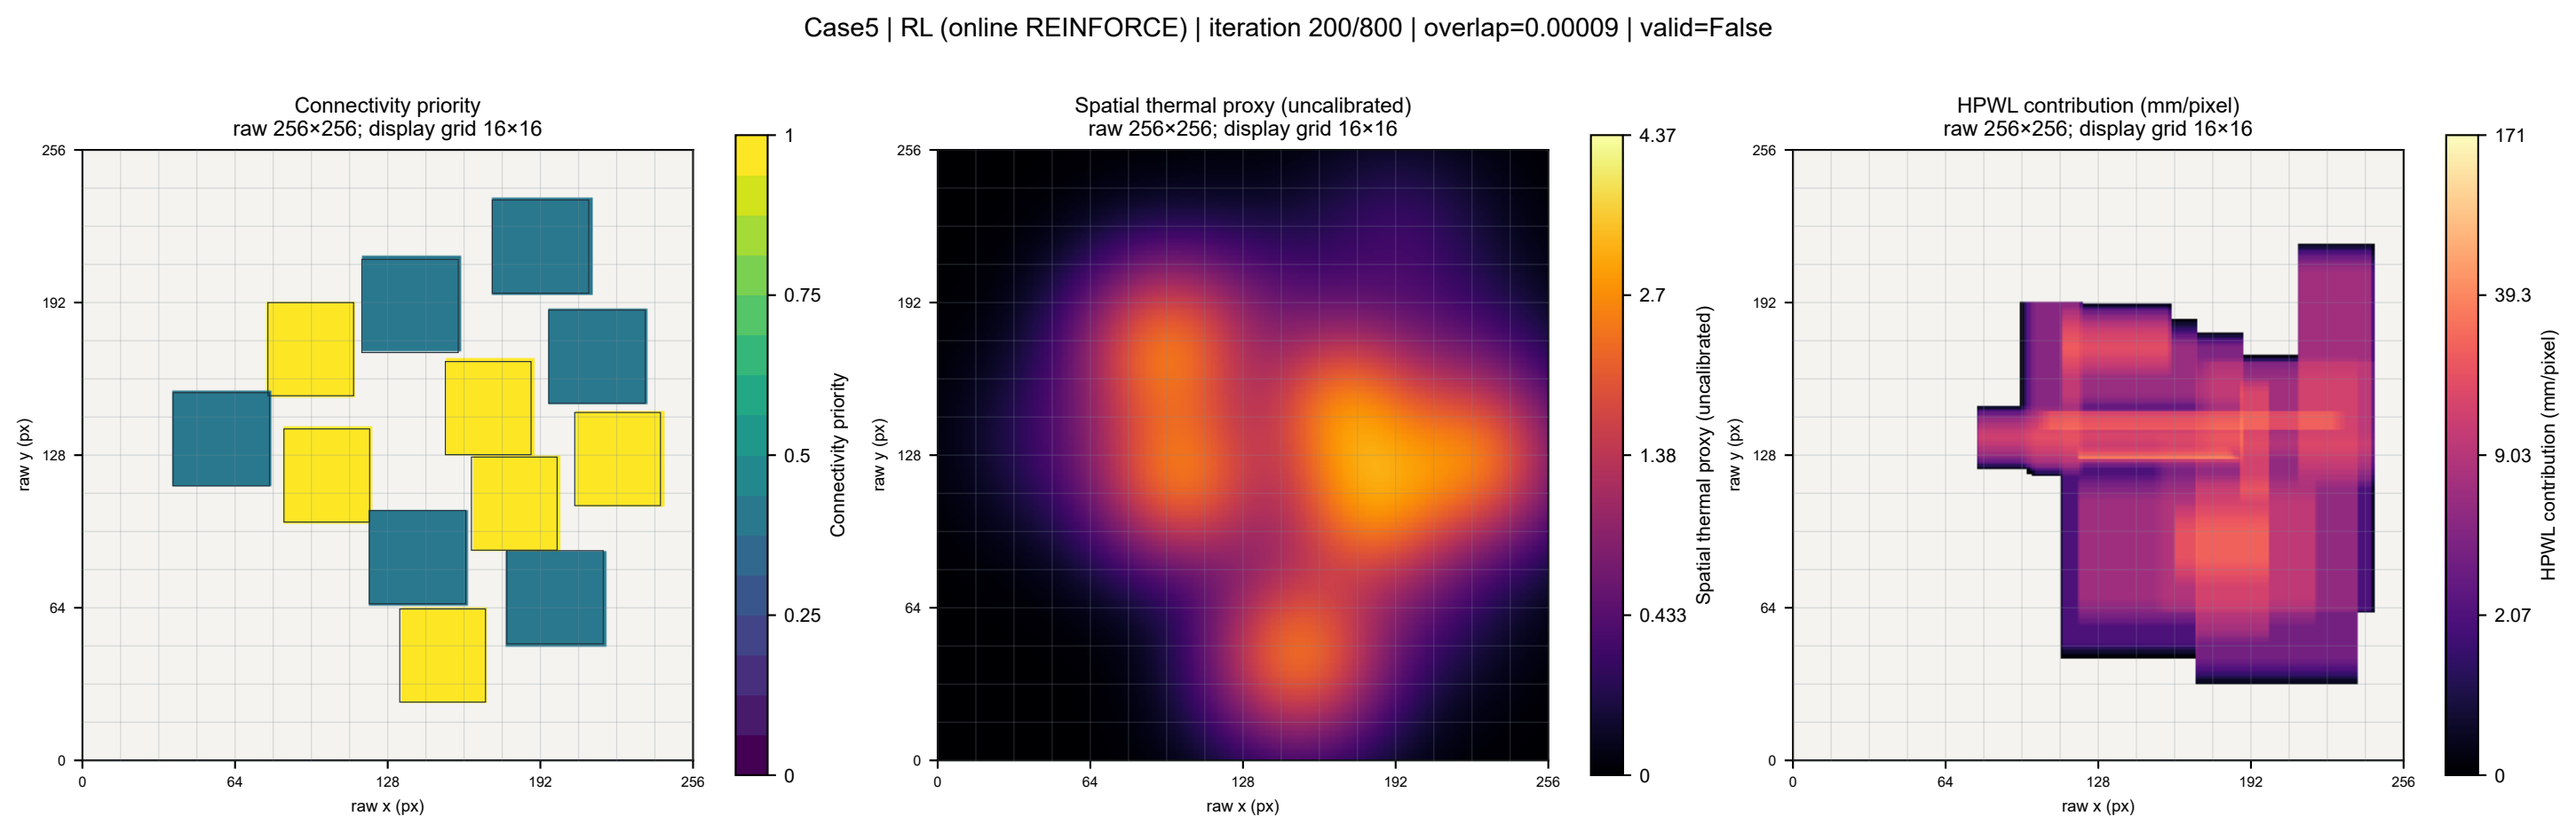

Case5 | RL (online REINFORCE) | iteration 200/800 | overlap=0.00009 | valid=False
Connectivity priority
raw 256×256; display grid 16×16
raw y (px)
raw x (px)
Connectivity priority
Spatial thermal proxy (uncalibrated)
raw 256×256; display grid 16×16
Spatial thermal proxy (uncalibrated)
HPWL contribution (mm/pixel)
raw 256×256; display grid 16×16
HPWL contribution (mm/pixel)