


## Optional LED Illumination

Sharp & even light  
Powerful and Long lasting  
Less stress to patient's eye



6x, 10x, 16x, 25x, 40x

# Slit Lamp LS-i5

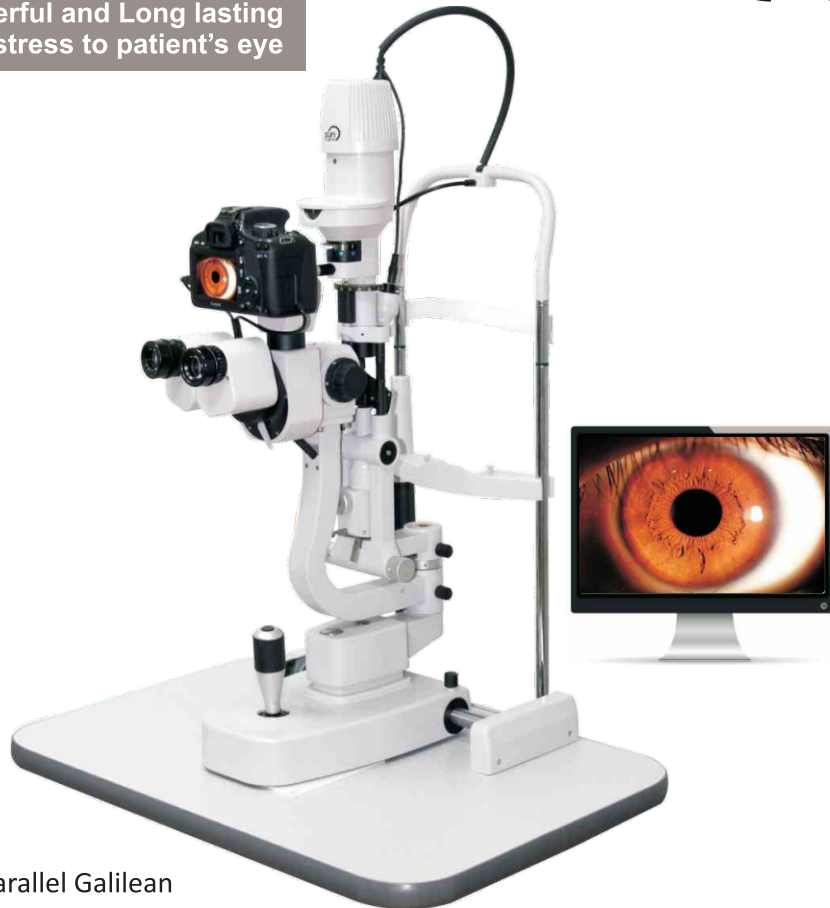

Microscope Type  
Magnification Changer  
Eyepiece  
Total magnification  
Diameter of Vision field  
Pupil adjusting range  
Diopter adjustment  
Slit image width  
Slit image length  
Diameter of aperture

Slit angle  
Illumination tilting  
Filter


Illumination  
Fixation  
Power

Dimension

Package

Parallel Galilean  
Revolving the Drum  
12.5X  
6X 10X 16X 25X 40X  
Ø37 Ø23 Ø14 Ø8.7 Ø5.7 mm  
54mm ~ 82mm  
-7D ~ +7D  
0mm ~ 14mm continuous  
1mm ~ 14mm continuous  
Ø14mm Ø10mm Ø5mm  
Ø3mm Ø1mm Ø0.2mm  
0 ~ 180 Rotatable continuous  
5, 10, 15, 20 totally 4 steps  
Heat absorption, Grey, Red  
free (Green), Cobalt Blue  
12V, 30W halogen bulb.  
Red LED 3.5V.  
Input voltage 100 ~ 240V  
Input Frequency 48 ~ 62 Hz  
Input Power 60VA  
740 x 650 x 450 mm total  
27kg  
Carton

## LS-i5 Imaging Gallery

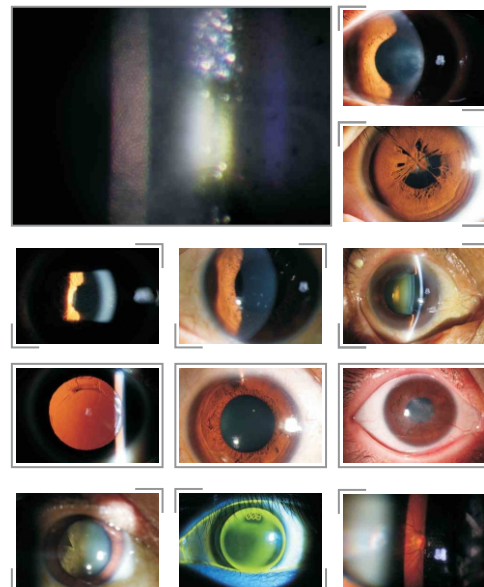

## TARUN ENTERPRISES

8/8, Strachy Road, Allahabad - 211001, U.P., INDIA  
Phone : +91 8176080204 e-mail : info@optitecheyecare.com

A96/1, Second Floor, Phase II,  
Mayapuri Industrial Area, New Delhi - 110064  
Phone: 011 47070362  
e-mail: delhi@optitecheyecare.com