

Product Data Sheet



FD-5010S
Finished Area
General Floor Drain

Standard: ASME A112.6.3-2001

Bottom Outlet

Grate Free Area
max. 145 cm²



Features

- General floor drain for finished area, suitable with 2, 3 & 4" pipe connection.
- Bottom outlet.
- Small Sump Body with 9" (229 mm) flange dia.
- Inside Gasketed connection or No Hub (Coupling) Connection (2", 3" & 4") as per DIN and ASTM pipe size or Threaded connection.
- Reversible membrane clamp with key holes.
- Weep Holes for any seepage around the drain.
- Optional ½" primer trap connection.
- Light-Duty Adjustable Square Strainer.
- 3 Hex Flange Bolts.

Materials


- Body and clamp: Gray Cast Iron.
- Square Strainer: Nickel Bronze./ Stainless Steel.
- Gasket: EPDM
- Bolts: Stainless Steel

Dimensions


As per Drawing

Surface Finish

- Cast iron parts: Epoxy Coating
- Nickel Bronze/ SS Parts: Satin Finish

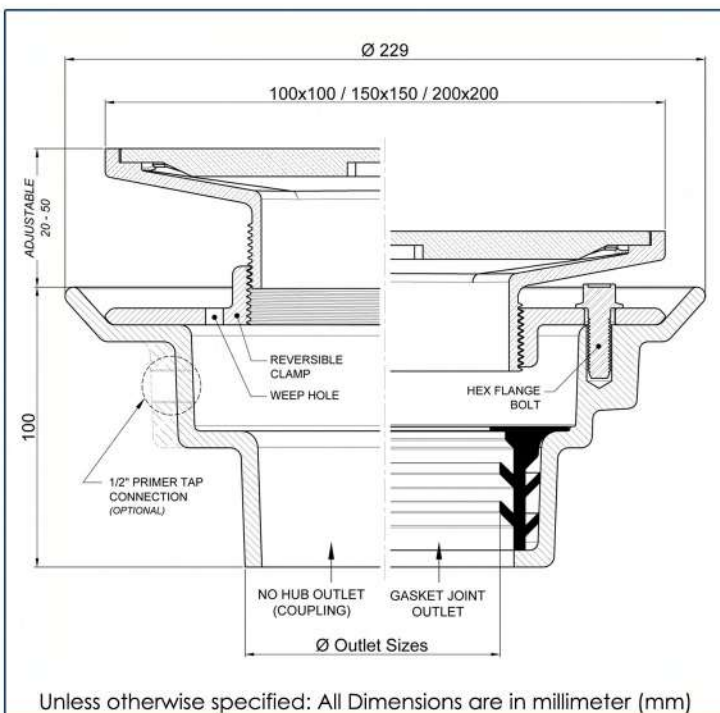

	FLOOR DRAINS	Bottom Outlet - Square Strainer	Date:
	FINISHED AREA	Model No: FD-5010S	

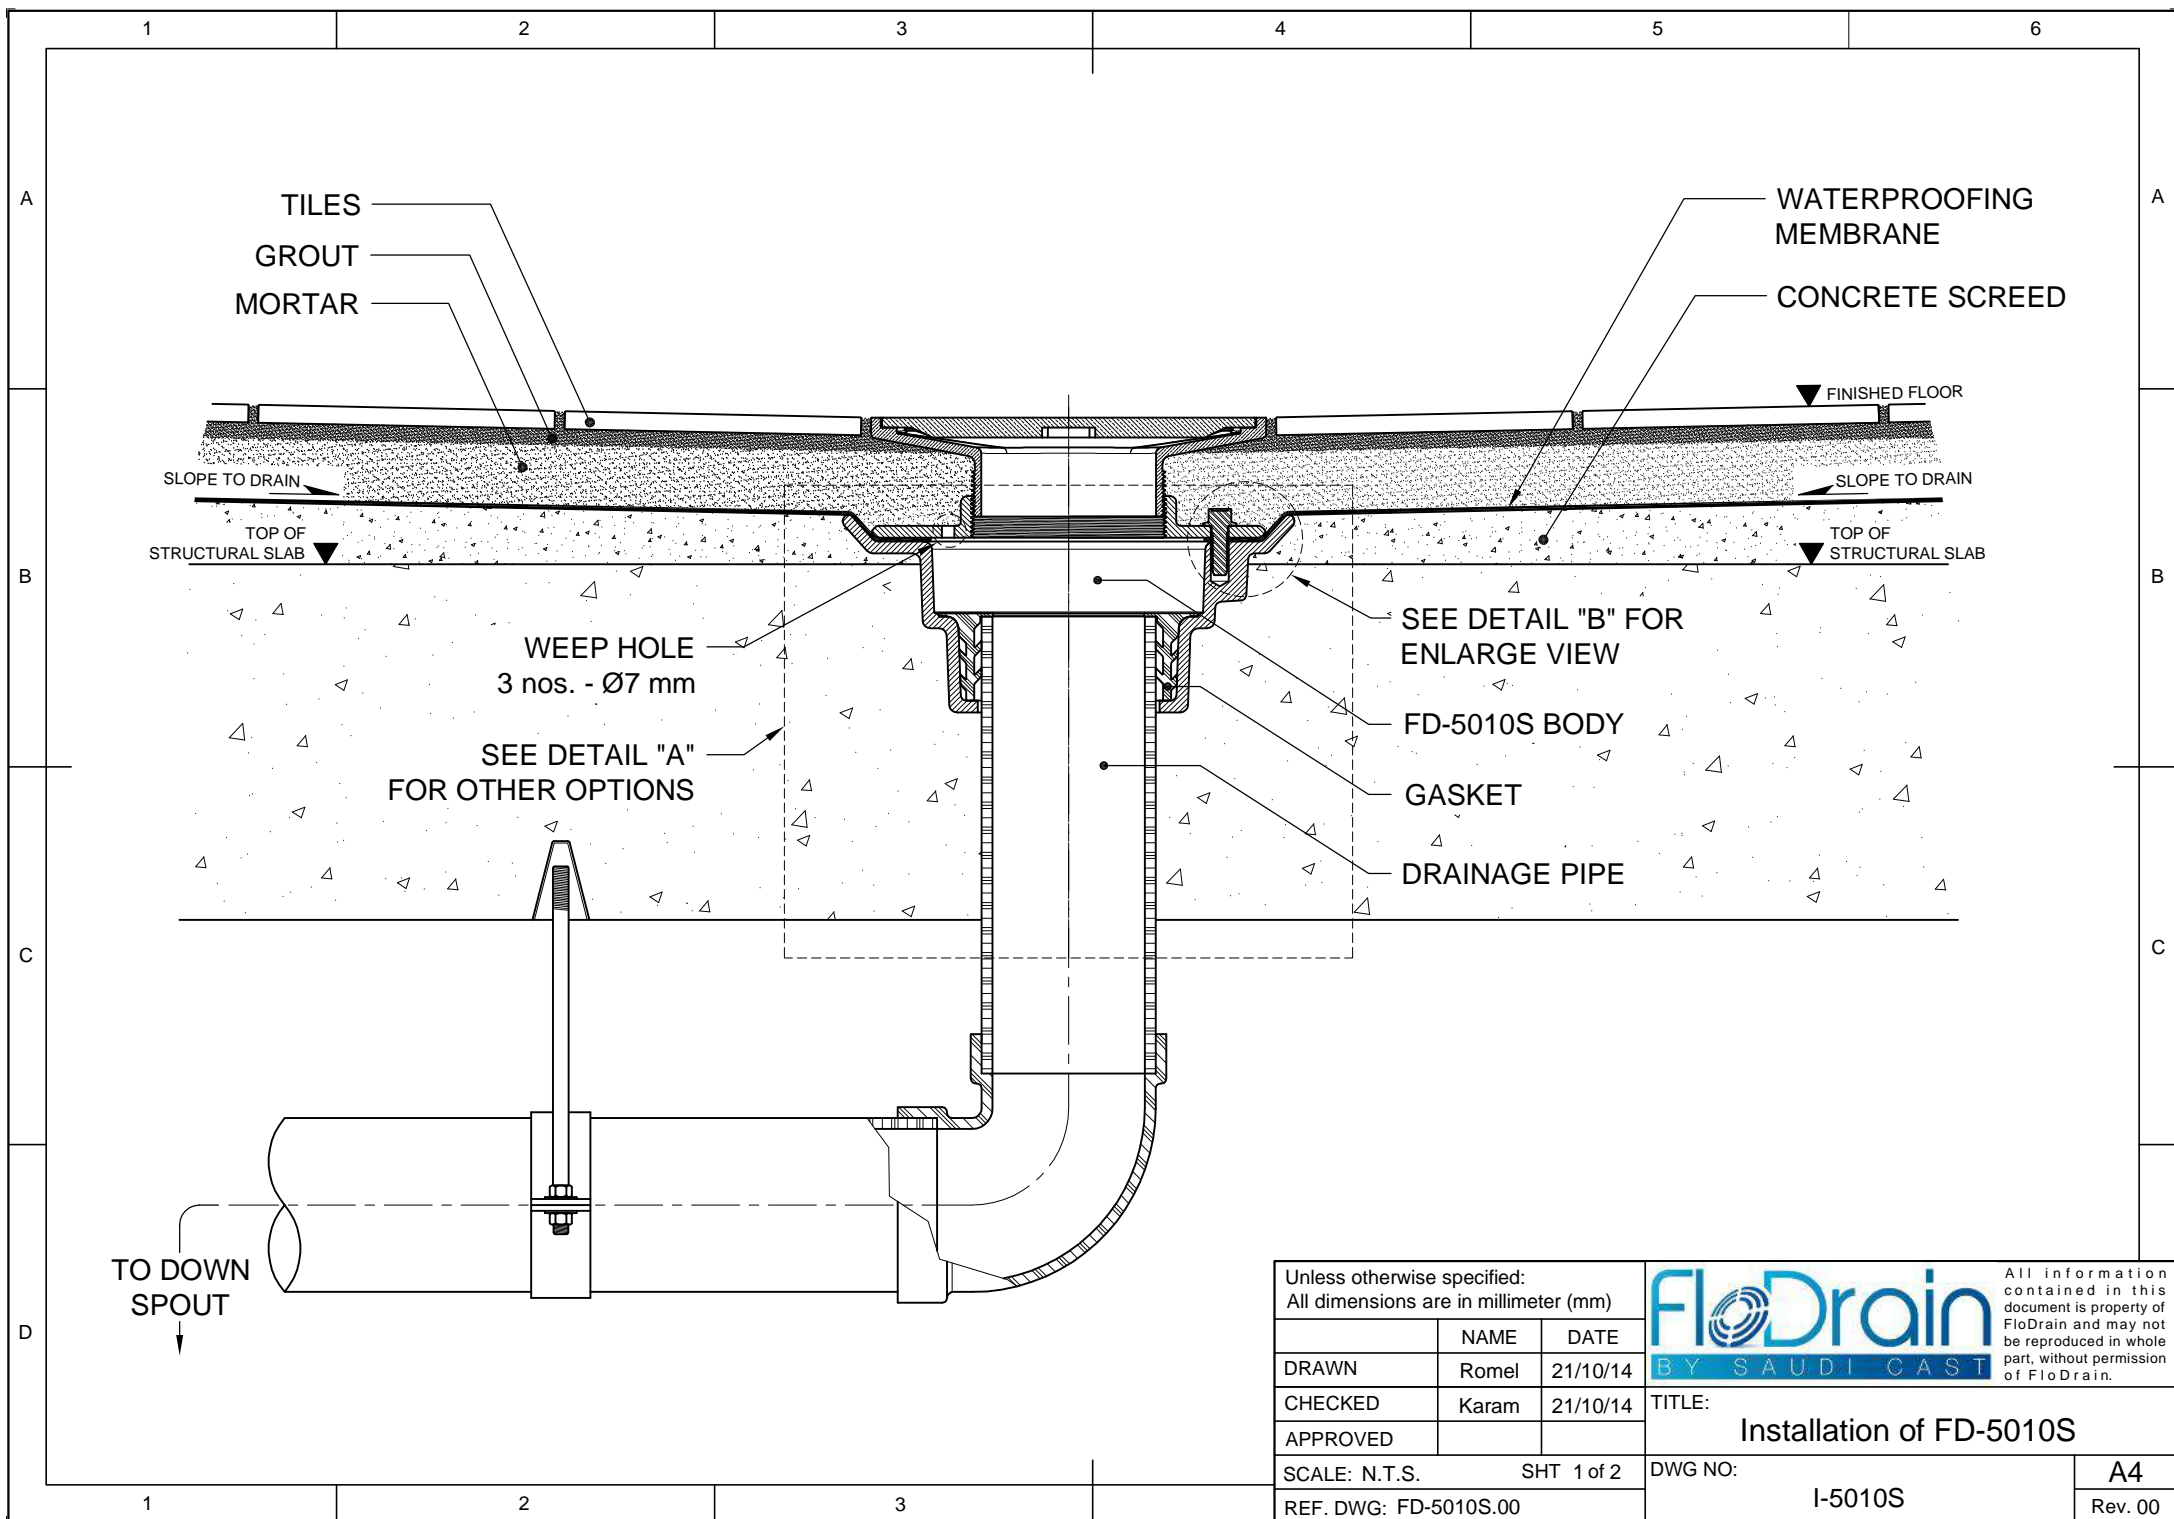

Unless otherwise specified: All dimensions are in millimeter (mm)			 BY SAUDI CAST	<div>All information contained in this document is property of FloDrain and may not be reproduced in whole part, without permission of FloDrain.</div>
	NAME	DATE		
DRAWN	Romel	21/10/14		
CHECKED	Karam	21/10/14		
APPROVED				
SCALE: N.T.S. SHT 1 of 2			TITLE: Installation of FD-5010S	
REF. DWG: FD-5010S.00			DWG NO: I-5010S	A4 Rev. 00