



## Energy of a particle in SHM

Work is done on particle to displace  $\rightarrow$  restoring force. So P.E. in spring stored & motion is K.E. Total energy constant

P.E.  $F = mf = -m\omega^2 x \therefore dW = Fdx = m\omega^2 x dx$  (against so no -ive sign)  
 $\therefore E_p = \int_0^x m\omega^2 x dx = \frac{1}{2} m\omega^2 x^2$

K.E.  $v = \omega \sqrt{a^2 - x^2}$ ,  $E_k = \frac{1}{2} mv^2 = \frac{1}{2} m\omega^2 (a^2 - x^2)$


$E_{Tot} = E_k + E_p = \frac{1}{2} m\omega^2 a^2 = \text{constant.}$

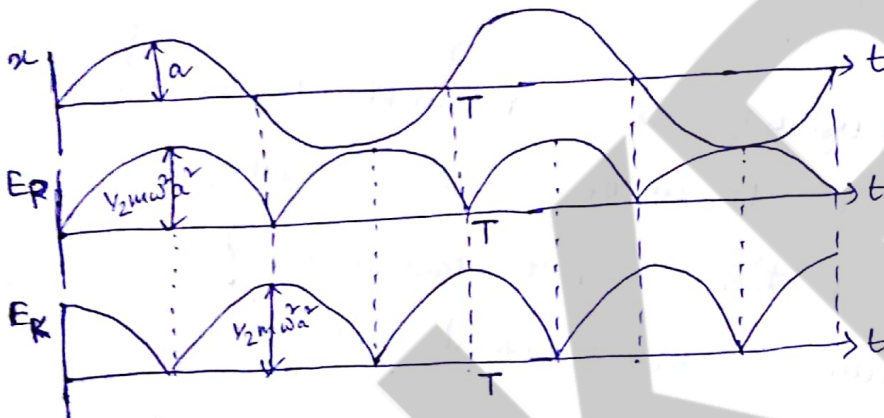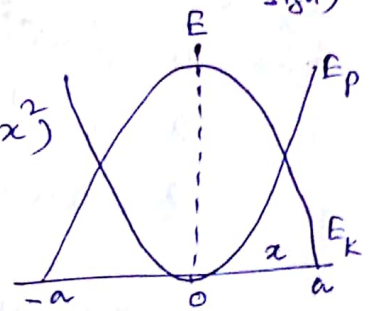


## Examples of SHM

### Horizontal oscillations

$F = -Kx = m\ddot{x}$   
 $\ddot{x} + \omega^2 x = 0$   $\omega = \sqrt{\frac{K}{m}}$   
 $x = A \cos(\omega t + \phi)$ ,  $T = 2\pi \sqrt{\frac{m}{K}}$   
 initial cond.  $\rightarrow$  material.

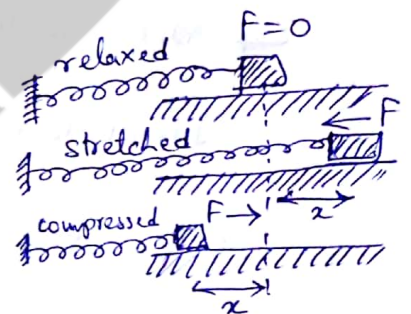

### Vertical oscillations

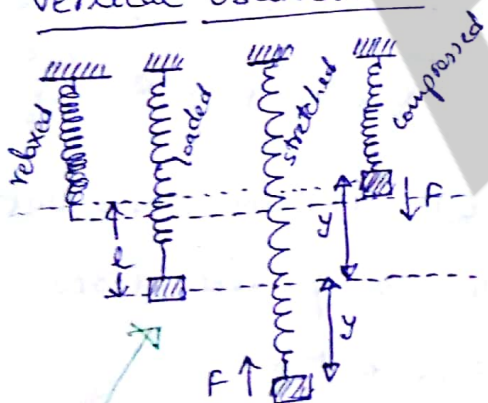

static equilibrium

Tension on spring  $F_0 = Kl$

force on mass =  $mg$ .

Static eq.  $mg = Kl$ .

stretched tension on spring =  $K(l+y)$

$mg - F = K(l+y) = Kl + Ky$   
 $= \cancel{mg} + Ky$

$F = -Ky$ .

compressed


$mg + F = K(l-y) = \cancel{mg} - Ky$

$F = -Ky$ .

## Two spring system (Longitudinal oscillations)

horizontal frictionless surface,  
rigid wall, massless spring,  
relaxed length  $a_0$ .

After connection, static equilibrium

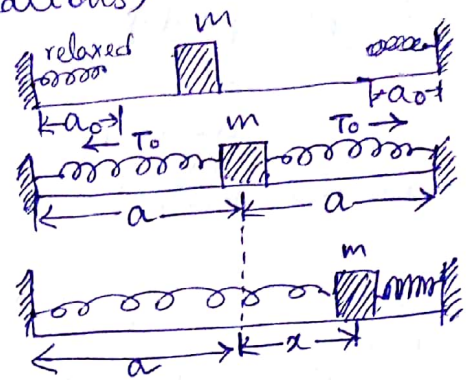

$$T_0 = K(a - a_0)$$

$x$  = displacement to right. restoring force by left spring  $-K(a + x - a_0)$   
force on right spring  $K(a - x - a_0)$

$$\therefore F_x = K(a - x - a_0) - K(a + x - a_0) = -2Kx$$

$$m\ddot{x} = -2Kx \quad \text{or} \quad \ddot{x} + \omega^2 x = 0$$

$$\omega = \sqrt{\frac{2K}{m}}$$

$$T_{\text{long}} = 2\pi \sqrt{\frac{m}{2K}}$$

## Two spring system (Transverse oscillations)

$$T_0 = K(a - a_0)$$

$$T = K(l - a_0)$$

$$F_y = -2T \sin \theta = -2T \frac{y}{l}$$

$$\therefore m\ddot{y} + \frac{2T}{l}y = 0 \quad \text{or} \quad \ddot{y} + \omega^2 y = 0$$

$$\omega^2 = \frac{2T}{ml} = \frac{2K(l - a_0)}{ml}, \quad \text{but } l = f(y).$$

$$\text{So } \ddot{y} + \frac{2K}{m} \left(1 - \frac{a_0}{f(y)}\right) y = 0 \quad \text{is not a SHM.}$$

① slinky approximation  $a \gg a_0$  or  $\frac{a_0}{a} \ll 1$ .

$$\omega^2 = \frac{2K}{m} \left(1 - \frac{a_0}{l}\right) = \frac{2K}{m} \left(1 - \frac{a_0}{a} \frac{a}{l}\right) \quad \text{as } l > a.$$

$$= \frac{2K}{m}. \quad \text{Then SHM.}$$

$$\omega = \sqrt{\frac{2K}{m}}$$

$$T_{\text{trans}} = 2\pi \sqrt{\frac{m}{2K}}$$

"large" harmonic oscillations

② small oscillation approximation  $a \gg a_0$  but  $y \ll a$  or  $l$ .

$$\therefore l = \sqrt{y^2 + a^2} = a \sqrt{\frac{y^2}{a^2} + 1} \approx a$$

$$\text{Then also } \omega^2 = \frac{2K}{m} \left(1 - \frac{a_0}{a}\right)$$

SHM

$$T_{\text{trans}} = 2\pi \sqrt{\frac{m}{2K \left(1 - \frac{a_0}{a}\right)}}$$

$$\therefore T_{\text{long}} = \sqrt{1 - \frac{a_0}{a}} T_{\text{trans}}$$

So longitudinal is faster than transverse.



## Simple pendulum

$$F' = mg \cos \theta$$

(tension in string)

$$F = -mg \sin \theta$$

(restoring force)

$$= -mg \left( \theta - \frac{\theta^3}{3!} + \frac{\theta^5}{5!} - \dots \right) \approx -mg\theta$$

$\left[ \lim_{\theta \rightarrow 0} \right]$

$$\text{or, } m\ddot{x} = -mg \frac{x}{l} \quad \text{or} \quad \ddot{x} + \frac{g}{l}x = 0.$$

$$\therefore \omega = \sqrt{\frac{g}{l}}, \quad T = 2\pi \sqrt{\frac{l}{g}}. \quad (\text{mass independent})$$

String tension when pendulum at mean position

$$F' = mg + \frac{mv^2}{l}$$

(centrifugal force)

at A, Energy = KE + PE = 0 + mgh = mgh


at O, Energy = KE + PE =  $\frac{1}{2}mv^2 + 0 = \frac{1}{2}mv^2$

Conservation of energy  $\Rightarrow \frac{1}{2}mv^2 = mgh$  or  $v^2 = 2gh$ .


$$\text{or } v^2 = 2g(l - l \cos \theta) = 2gl(1 - \cos \theta) = 2gl \times 2 \sin^2 \frac{\theta}{2}$$

$$\approx 4gl \left( \frac{\theta}{2} \right)^2 = gl\theta^2.$$

$$\therefore F' = mg + \frac{m}{l} gl\theta^2 = mg(1 + \theta^2).$$

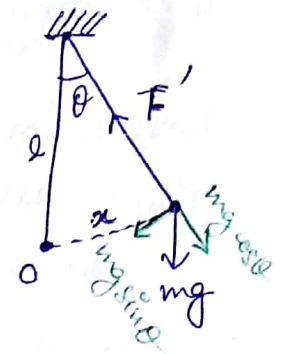

$$x = l\theta$$

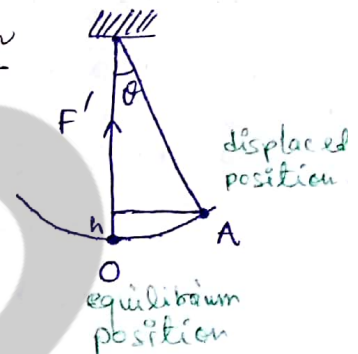

## Compound Pendulum


arbitrary shaped rigid body oscillating about a horizontal axis passing through it.

restoring force  $\leftrightarrow$  reactive couple or torque

moment of restoring force

$$= -mgl \sin \theta$$

angular acceleration  $\alpha = \frac{d^2\theta}{dt^2}$ , moment of inertia = I.

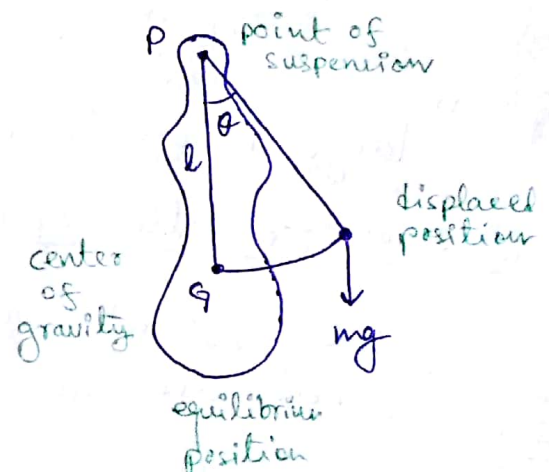

$$\tau = I\alpha = I \frac{d^2\theta}{dt^2} = -mgl \sin\theta$$

$$\text{or } \frac{d^2\theta}{dt^2} = -\frac{mgl}{I} \sin\theta \approx -\frac{mgl}{I} \theta \quad \text{or } \frac{d^2\theta}{dt^2} + \omega^2\theta = 0$$

$$T = 2\pi \sqrt{\frac{I}{mgl}}$$

If we consider moment of inertia about a parallel axis through G,  $K$  = radius of gyration then using parallel axis theorem,

$$I = mk^2 + ml^2 \quad \therefore T = 2\pi \sqrt{\frac{K^2 + l^2}{g}} = 2\pi \sqrt{\frac{l'}{g}}$$

$$\text{equivalent length of simple pendulum} = \frac{K^2}{l} + l.$$

### Torsional Pendulum

twist of shaft  $\rightarrow$  torsional oscillations


$$\text{torsional couple} = -\tau\theta$$

$$\text{couple due to acceleration} = I \frac{d^2\theta}{dt^2}$$

$$I \frac{d^2\theta}{dt^2} = -\tau\theta, \quad T = 2\pi \sqrt{\frac{I}{\tau}}$$

$$\text{From classical mechanics course, } \tau = \frac{\pi\eta d^4}{32L} = \frac{\pi\eta r^4}{2L}$$

$d$  = shaft diameter,  $\eta$  = modulus of rigidity,  
 $= 2\tau$



### Electrical Oscillator

Capacitor is charged  $\Rightarrow$  electrostatic energy in dielectric media. It discharges through the inductor electrostatic energy  $\Leftrightarrow$  magnetic energy. (no dissipation of heat)


$$\text{voltage across inductor} = -L \frac{di}{dt} = -L \frac{d^2q}{dt^2}$$

$$\text{voltage across capacitor} = \frac{q}{C}$$

$$\text{No e.m.f. circuit, } \frac{q}{C} = -L \frac{d^2q}{dt^2} \quad \text{or } \frac{d^2q}{dt^2} + \frac{q}{LC} = 0$$

$$\omega^2 = \frac{1}{LC}, \quad q = q_0 \sin(\omega t + \phi)$$

charge on capacitor varies harmonically.



$$i = \frac{dq}{dt} = \omega q_0 \cos(\omega t + \phi)$$

$$V = \frac{q}{C} = \frac{q_0}{C} \sin(\omega t + \phi)$$

Total energy = magnetic energy + electric energy

$$= \int iV dt + \frac{1}{2} CV^2 = \int i L \frac{di}{dt} dt + \frac{1}{2} CV^2$$

$$= \int L i di + \frac{1}{2} CV^2 = \frac{1}{2} Li^2 + \frac{1}{2} CV^2 = \frac{1}{2} L \dot{q}^2 + \frac{1}{2} CV^2$$

In mechanical oscillation, Total energy =  $\frac{1}{2} m \dot{x}^2 + \frac{1}{2} kx^2$

$$\frac{1}{2} CV^2 = \frac{1}{2} C \left( \frac{q}{C} \right)^2 = \frac{q^2}{2C}$$

In electrical oscillation, Total energy =  $\frac{1}{2} L \dot{q}^2 + \frac{1}{2C} q^2$

equivalence