AEX's high voltage Heat Shrink Busbar Insulation Tapes are adhesive-coated tapes that provide Insulation enhancement and protection against accidentally induced flash-overs for Copper or Aluminium busbar sections where tube products cannot easily be applied.

The AHT tapes are quick and easy to install. Upon application of heat, the tapes shrink and the adhesive lining melts, joining the overlapping layers to produce a complete seal.

Although the AHT tapes will stick to themselves and other insulating materials, they will not stick to to metal or porcelain, allowing easy removal for maintenance. Thus, it offers a simple and effective solution to the problems of retrofit insulation of busbars, particularly where existing equipment cannot be dismantled. They are easily installed over a wide variety of shapes, including complex connections

The Busbar Insulation Tapes are made from thermally stabilised Non-tracking Cross-linked Polyolefin material that offers abiding service reliability.

KEY FEATURES AND BENEFITS:

- High Dielectric strength.
- Exceptional insulation and long-term reliability even at high continuous operating temperatures.
- Excellent mechanical strength and impact resistance.
- Prevent Busbar from chemical corrosion effected by strong acid, alkali, etc.
- Halogen-free and Non-tracking.
- UV and weather-resistant.
- Suitable for Indoor as well as Outdoor application.
- Quick and easy to install. No special tools or skills needed.
- Unlimited Shelf life.

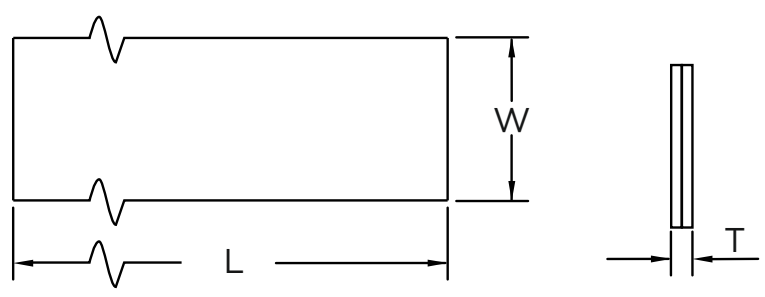

Selection Chart

Product Code	W (mm) (min.)	L (Mtr.) (min.)	T (mm) (±10%)
ATH 50	50.0	5.0	0.90

W: Width, L: Length, T: Total Thickness after free recovery.

Technical Properties

Test Description	Typical Value	Test Method
Tensile Strength	10 MPa (Min.)	ASTM D638
Elongation	300% (Min.)	ASTM D638
Accelerated ageing	150°C for 168 hrs.	ASTM D2671
Tensile Strength	10 MPa (Min.)	ASTM D638
Elongation	275% (Min.)	ASTM D638
Low Temp. Flexibility (-40°C for 4 hrs)	No Cracking	ASTM D2671
Shrink Temperature	125°C	IEC 216
Continuous Operating Temp.	-40 to +90°C	IEC 216
Di-electric Strength	13 kV/mm. (min.)	ASTM D149
Volume Resistivity	1 x 10^{14} Ohm.cm (min.)	ASTM D257