

Heat Shrinkable End Cap



AEX's Heat Shrink End Sealing Caps are designed to provide mechanical protection and an environmental seal against moisture and dirt to all types of Power Cable ends.

AEX Heat Shrink End Caps are made from high-quality Cross-linked Polyolefin material that is halogen-free. It contains a minimum of 2.5% carbon to protect it from ultraviolet rays.

The Caps are coated inside with Hot melt adhesive which melts and flows throughout the shrinking process creating a reliable moisture seal that is also fungus and weather-resistant.

THE OTHER TYPES:


- AECV – Valved End Caps, fitted with Valves for pressurised application in jelly-filled Telecom Cables.
- AECL – Live End Sealing Kit, i.e., a combination of Caps in a kit, for insulating energized Power Cables up to 1000V.
- AECC – Conductive End Caps available with Conductive material and Conductive Mastic

KEY FEATURES AND BENEFITS:

- Can also be fitted on Pipes or Poles made of any type of plastic, metal or wood
- Resistant to aggressive chemical agents and moisture
- Excellent electrical performance with high mechanical strength and impact resistance
- 100% waterproof sealing as per IP 68 against moisture and environmental contaminants
- UV resistant
- Halogen free
- Quick and easy to install
- Unlimited Shelf life

Technical Properties

Test Description	Nominal Value	Test Method
Tensile Strength	12 N/mm ² (min.)	ASTM D638
Elongation	350% (min.)	ASTM D638
Water Absorption	0.50% (max.)	ASTM D570
Density	1.00 ±0.2 gm/cm ³	ASTM D792
Hardness	45 +/- 10 Shore D	ASTM D2240
Low Temperature Flexibility	No Cracking	ASTM G154
Thermal Ageing 150°C for 168 hrs.		
Tensile Strength	10 N/mm ² (min.)	ASTM D638
Elongation	300% (min.)	ASTM D638
Di-electric Strength	12 kV/mm. (min.)	ASTM D149
Volume Resistivity	1x10 ¹⁴ Ohm.cm (min.)	ASTM D257

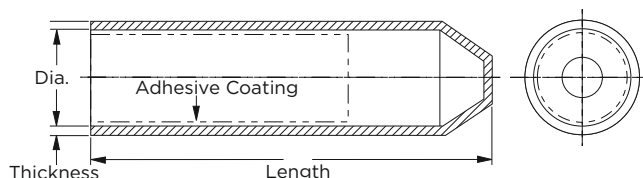

Product Dimensions

Product Code	Supplied Dia. (Min.)	Free Recovered Dia. (Max.)	Supplied Length (Min.)	Free Recovered Thick.(±10%)	Application Range
AEC 6/2	6.0	2.0	25.0	2.0	2.5 - 4.0
AEC 8/2	8.0	2.0	25.0	2.0	2.5 - 6.0
AEC 12/4	12.0	4.0	40.0	2.4	5.0 - 8.0
AEC 14/4	14.0	4.0	40.0	2.4	5.0 - 11.0
AEC 20/7.5	20.0	7.5	55.0	2.4	10.0 - 16.0
AEC 25/8	25.0	8.0	55.0	2.4	10.0 - 20.0
AEC 20/8L	20.0	8.0	75.0	2.5	10.0 - 16.0
AEC 25/8L	25.0	8.0	75.0	2.5	10.0 - 20.0
AEC 30/11	30.0	11.0	75.0	2.5	13.0 - 26.0
AEC 35/11	35.0	11.0	75.0	2.5	13.0 - 30.0
AEC 30/11L	30.0	11.0	110.0	2.5	13.0 - 26.0
AEC 35/11L	35.0	11.0	115.0	2.5	13.0 - 30.0
AEC 40/15	40.0	15.0	90.0	3.5	17.0 - 35.0
AEC 45/15	45.0	15.0	90.0	3.5	17.0 - 40.0
AEC 40/15L	40.0	15.0	120.0	3.5	17.0 - 35.0
AEC 45/15L	45.0	15.0	120.0	3.5	17.0 - 40.0
AEC 55/25	55.0	25.0	125.0	3.5	30.0 - 47.0
AEC 63/25	63.0	25.0	125.0	3.5	30.0 - 55.0
AEC 55/25L	55.0	25.0	170.0	3.4	30.0 - 47.0
AEC 63/25L	63.0	25.0	170.0	3.4	30.0 - 55.0
AEC 75/35	75.0	35.0	140.0	3.6	42.0 - 68.0
AEC 85/36	85.0	36.0	140.0	3.6	42.0 - 78.0
AEC 75/35L	75.0	35.0	180.0	4.0	42.0 - 68.0
AEC 85/36L	85.0	36.0	180.0	4.0	42.0 - 78.0
AEC 100/45	100.0	45.0	160.0	4.0	55.0 - 90.0
AEC 120/45	120.0	45.0	160.0	4.6	55.0 - 110.0
AEC 100/45L	100.0	45.0	200.0	4.0	55.0 - 90.0
AEC 120/45L	120.0	45.0	200.0	4.5	55.0 - 110.0
AEC 130/60	130.0	60.0	160.0	5.4	75.0 - 120.0
AEC 158/60	158.0	60.0	165.0	5.2	75.0 - 145.0
AEC 130/60L	130.0	60.0	300.0	4.5	75.0 - 120.0
AEC 160/65L	160.0	65.0	300.0	4.4	75.0 - 145.0
AEC 170/65L	170.0	65.0	300.0	4.4	75.0 - 150.0