

Heat Shrinkable Low Voltage Cable Breakouts



AEX's Heat Shrink Low Voltage Cable Breakouts are used to insulate and seal the crutches of 2, 3, 4, 5, 6, and 7 core XLPE, PVC, PILC and Rubber insulated Cables up to 3.3kV.

The Breakouts are made from thermally stabilised Cross-linked Polyolefin material that offers abiding service reliability. It contains a minimum of 2.5% carbon.


By applying the heat, the diameter reduces to tightly grip the outer jacket and the cores of the Cable. The inside-coated Hot melt adhesive melts and flows throughout the shrinking process, creating a reliable moisture and environmental seal at the cable crutch area.

KEY FEATURES AND BENEFITS:

- Can be fitted over all types of Cables
- 100% waterproof sealing as per IP 68 against moisture and environmental contaminants
- Resistant to UV, abrasion, weathering, atmospheric pollution and aggressive chemical agents.
- Excellent electrical performance with high mechanical strength and impact resistance
- Halogen-free
- Quick and easy to install.
- Smaller inventory possible as each Breakout size will several different sizes and types of Cables
- Unlimited Shelf life

Technical Properties

Test Description	Nominal Value	Test Method
Tensile Strength	12 N/mm ² (min.)	ASTM D638
Elongation	350% (min.)	ASTM D638
Water Absorption	0.50% (max.)	ASTM D570
Density	1.00 ±0.2 gm/cm ³	ASTM D792
Hardness	43 +/- 10 Shore D	ASTM D2240
Low Temperature Flexibility (-40°C for 4 hrs.)	No Cracking	ASTM G154
Thermal Ageing (150°C for 168 hrs.)		
Tensile Strength	10 N/mm ² (min.)	ASTM D638
Elongation	300% (min.)	ASTM D638
Di-electric Strength	12 kV/mm. (min.)	ASTM D149
Volume Resistivity	1x10 ¹⁶ Ohm.cm (min.)	ASTM D257
Di-electric Constant	5 (max.)	ASTM D150

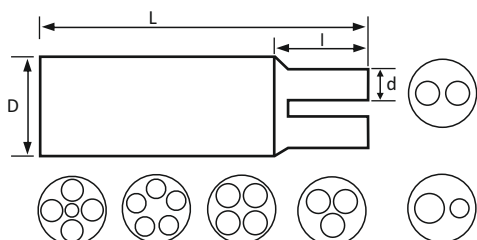

Product Code	No. of Cores	D		d1		d2		L		I1		I2		Thickness		
		Ds	Df	ds	df	ds	df	Ls	Lf	Ls	Lf	Ls	Lf	TB	TC1	TC2
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.	Min.	Min.	Min.	Min.	±10%	±10%	±10%
A5LB 2557	5	65	25	23	7	16	5	125	150	40	51	35	40	2.5	2.5	2.0
A5LB 3979	5	90	39	30	9	24	7	133	185	30	50	30	50	2.7	2.7	2.7
A5LB 3979A	5	100	39	35	9	16	7	133	185	30	50	30	50	2.7	2.7	2.7

D,d: Internal Diameter; s : as supplied; f: After free recovery; TB, TC: Thickness of Body & Core All dimensions are in mm

Product Dimensions

Product Code	No. of Cores	D		d		L		I		Thickness	
		Ds	Df	ds	df	Ls	Lf	Is	If	TB	TC
		Min.	Max.	Min.	Max.	Min.	Min.	Min.	Min.	±10%	±10%
A2LB 0803S	2	22	8	9	3	70	85	14	20	2.2	2.0
A2LB 0803	2	28	8	12	3	70	85	15	20	2.2	2.0
A2LB 1004	2	32	10	14	4	70	85	15	20	2.2	2.0
A2LB 1004A	2	42	11	14	4	70	85	15	20	2.2	2.0
A2LB 1004L	2	34	10	14	4	77	107	27	42	3.0	3.0
A2LB 1004AL	2	42	11	14	4	77	107	25	42	3.0	3.0
A2LB 1506	2	45	15	18	6	90	110	25	43	3.0	3.5
A2LB 2007	2	60	20	24	7	95	120	25	34	3.0	2.5
A2LB 2007A	2	70	22	30	8	90	120	25	34	3.0	2.5
A2LB 6515	2	125	65	46	15	110	130	40	55	2.5	2.2
A2LB 6515A	2	150	65	50	15	105	130	40	55	2.5	2.2
A3LB 0803	3	32	8	12	2.8	90	104	20	28	2.2	1.8
A3LB 0903	3	32	9	12	3	85	100	15	24	2.0	1.7
A3LB 1304	3	36	14	15	4	80	100	15	21	2.2	2.0
A3LB 1304A	3	45	14	15	4	80	100	15	21	2.2	2.0
A3LB 2008	3	60	20	25	8	160	184	45	60	3.3	2.7
A3LB 2008A	3	70	20	27	8	155	184	40	60	3.3	2.7
A3LB 3013	3	80	30	36	13	185	215	60	75	3.6	3.3
A3LB 3013A	3	100	30	39	13	185	215	60	75	3.6	3.3
A3LB 4521	3	110	45	55	21	200	235	70	88	3.5	2.9
A3LB 4521A	3	125	45	57	21	190	230	65	88	3.5	2.9
A3LB 5527	3	140	56	68	28	215	260	80	90	4.0	3.5
A3LB 5527A	3	180	58	68	29	200	260	75	90	4.0	3.5
A3LB 6030	3	200	60	70	30	190	250	70	85	4.0	3.5
A4LB 0902	4	28	9	9	2.5	90	115	15	20	2.2	1.7
A4LB 0903	4	28	9	9	3	60	75	24	32	2.4	2.1
A4LB 1203S	4	30	12	10	3	80	100	15	25	2.4	1.7
A4LB 1203	4	40	12	12	3	80	100	15	25	2.4	1.7
A4LB 1504	4	41	16	14	4	80	100	15	23	2.4	1.7
A4LB 1504A	4	50	17	17	4	75	95	12	23	2.4	1.7
A4LB 2108	4	57	26	20	7	140	170	32	48	3.5	2.5
A4LB 2508	4	68	25	25	8	160	188	35	48	3.5	2.5
A4LB 2509	4	70	30	25	9	155	188	35	48	3.5	2.5
A4LB 4213	4	90	42	35	13	170	210	35	52	3.7	2.6
A4LB 4213A	4	110	44	35	13	170	208	40	51	3.7	2.6
A4LB 5424	4	125	44	40	14	170	208	30	51	3.7	2.6
A4LB 8018	4	215	80	50	18	150	175	30	45	2.5	2.5
A5LB 0803	5	32	8	10	3	95	115	22	28	2.1	1.7
A5LB 1504	5	50	16	15	4	85	110	21	33	3.2	2.6
A5LB 1504A	5	57	17	15	4	80	110	21	33	3.2	2.6
A5LB 3208	5	80	32	26	8	155	190	55	65	3.3	2.8
A5LB 3208A	5	100	33	32	8	145	190	50	65	3.3	2.8
A6LB 3707	6	85	37	25	7	100	138	30	46	3.2	2.6
A7LB 3707	7	95	37	26	7	100	135	40	55	2.7	2.6