
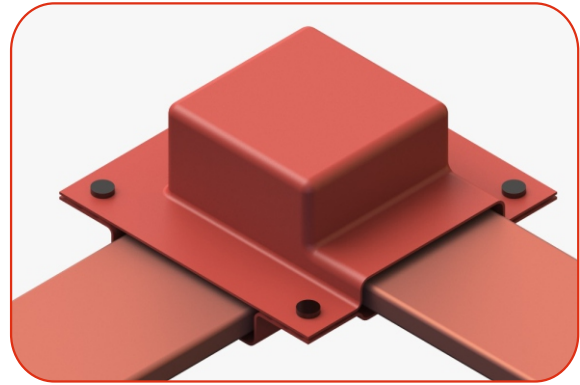


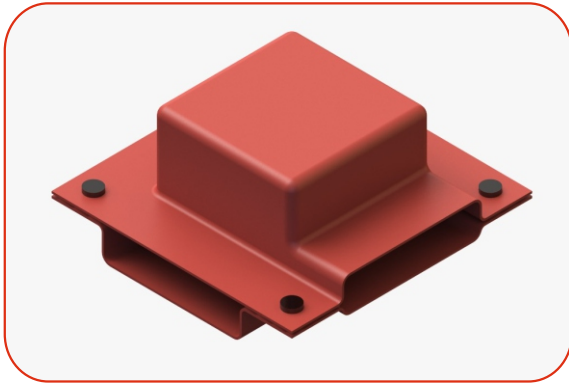

Busbar Insulation Covers are cold applied flexible electrical insulating shrouds for busbar and switchgear connections upto 36kV. These pliable boots can be installed, removed or replaced in few minutes. The covers are designed to protect and insulate energized busbar connections from flash-overs due to accidental contact.

Made from high quality Polyolefin material to provide excellent electrical insulation and to withstand higher operating temperature continuously.

It provides reduction in air clearance, which helps designing compact panels; thereby reduces the material costs by saving in busbar lengths, sheet metal components, etc.

KEY FEATURES AND BENEFITS:

- Halogen free.
- Low toxicity.
- Suitable for indoor and outdoor applications upto 36 kV.
- Provides flash-over protection on Tee, Elbow and Straight connections.
- High electrical strength.
- Resistance to weathering, UV rays, Chemicals and Solvents.
- Operating temperature level upto 105°C.
- Easy to install and remove for inspection and maintenance.
- Prevents Busbar from chemical corrosion effected by strong acid, alkali, salt, etc.
- REACH and RoHS compliant

Technical Properties

Test Description	Typical Value	Test Method
Tensile Strength	10 N/mm ² (min.)	ASTM D638
Elongation	350% (min.)	ASTM D638
Water Absorption	0.50% (max.)	ASTM D570
Density	1.2 gm/cm ³	ASTM D792
Hardness	45 +/- 10 Shore D	ASTM D2240
UV Resistance	No Cracking	ASTM G154
Thermal Ageing		
Tensile Strength	8 N/mm ² (min.)	ASTM D638
Elongation	300% (min.)	ASTM D638
Di-electric Strength	12 kV/mm. (min.)	ASTM D149
Volume Resistivity	1x10 ¹² Ohm.cm (min.)	ASTM D257

