


Heat Shrink Adhesive Coated Dual Wall Sleeves

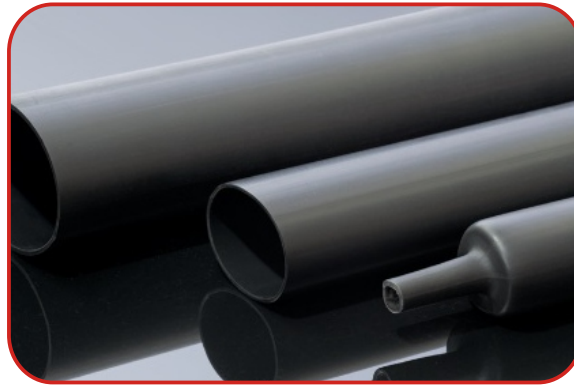


AEX's Heat Shrink Dual Wall Tubing (ADT) are made from thermally stabilised Cross-linked Polyolefin material that offers abiding service reliability. These Tubes are manufactured by co-extrusion of Polyolefin and hot melt adhesive.

These tubes provide an environmental seal and a permanent waterproof barrier for electrical components like Wire splices and harnesses in the Automobile and Communication industries.

By applying the heat, the tubing shrinks to the original smaller extruded diameter, fitting tightly over a wide range of electrical as well as electronic components. The inside-coated Hot melt adhesive melts and flows throughout the shrinking process and gives a reliable moisture seal over even the most irregular shapes.

KEY FEATURES AND BENEFITS:

- Excellent electrical characteristics and mechanical strength for low-voltage applications
- 100% waterproof sealing as per IP 68 against moisture and environmental contaminants
- Resistant to abrasion, weathering, atmospheric pollution and aggressive chemical agents.
- Resistant to Corrosion and fungus
- Halogen-free & UV resistant
- Quick and easy to install.
- Unlimited Shelf life when stored under normal conditions
- Standard colour Black, Shrink ratio 3:1
- Customized length possible
- High shrink ratio enables insulation of cables with connectors of various sizes suitable for use in telecommunication, industrial equipment, automotive and avionics.

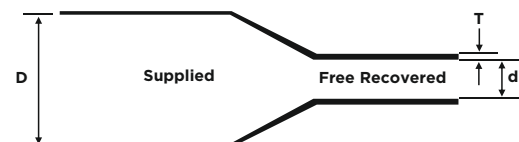

Technical Properties

Test Description	Typical Value	Test Method
Tensile Strength	12 N/mm ² (min.)	ASTM D638
Elongation	300% (min.)	ASTM D638
Water Absorption	0.20% (max.)	ASTM D570
Density	0.8 - 1.2 gm/cm ³	ASTM D792
Longitudinal Change	+/- 10 %	ASTM D2671
Hardness	45 +/- 10 Shore D	ASTM D2240
Thermal Ageing (150° C for 168 hrs.)		ASTM D2671
Tensile Strength	10 N/mm ² (min.)	ASTM D638
Elongation	250% (min.)	ASTM D638
Di-electric Strength	12 kV/mm. (min.)	ASTM D149
Volume Resistivity	1x10 ¹³ Ohm.cm (min.)	ASTM D257
UV Resistance	No Cracking	ASTM G154

Product Dimensions

Code	D Min.	d Max.	T ±10%
ADT 3 / 1	3	1	0.9 ±0.25
ADT 6 / 2	6	2	1.2 ±0.25
ADT 9 / 3	9	3	1.3 ±0.25
ADT 12 / 4	12	4	1.7 ±0.30
ADT 18 / 6	18	6	2.0 ±0.30
ADT 24 / 8	24	8	2.3 ±0.30
ADT 30 / 10	30	10	2.4 ±0.30
ADT 39 / 13	39	13	2.5 ±0.30
ADT 50 / 17	50	17	2.5 ±0.30
ADT 75 / 25	75	25	2.7 ±0.30
ADT 100 / 34	100	34	3.2 ±0.30

D - Dia. Supplied; d - Dia. Free Recovered;

T - Thickness after Free Recovery (Adhesive + Tube); All dimensions are in mm