


Heat Shrink Non-tracking Tube

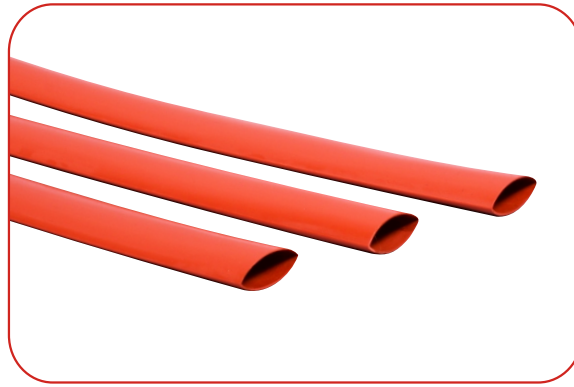


AEX's Heat Shrink Non-tracking Tubing provides environmental protection and tracking resistance to Medium Voltage (MV) Cable Termination up to 36kV.

In areas of extreme environmental conditions and high electrical stresses, AEX's Non-tracking tubing protects Cable insulation & substrates from erosion caused by leakage current. The anti-tracking sealant provides a moisture-proof environmental seal to the substrate.

These Tubes are made from thermally stabilised, Cross-linked, Non-tracking and weather-resistant Polyolefin material.

KEY FEATURES AND BENEFITS:

- Excellent anti-tracking performance and erosion resistance.
- Resistant to abrasion, weathering, atmospheric pollution and aggressive chemical agents
- Flame retardant and Halogen-free
- UV and weather-resistant
- Resistant to bacteria and fungi
- Suitable for Indoor as well as Outdoor application
- Unlimited Shelf life

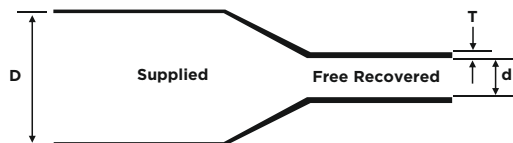

Technical Properties

Test Description	Typical Value	Test Method
Tensile Strength	10 N/mm ² (Min.)	ASTM D638
Elongation	350% (Min.)	ASTM D368
Density	1.2 ±0.2 gm/cm ³	ASTM D792
Longitudinal Change	- 10% (Max.)	ASTM D2671
Water Absorption	0.5% (Max.)	ASTM D570
Hardness	45 ± 10 (Shore D)	ASTM D2240
Heat Shock (250° C for 30 min.)	No Cracking	ASTM D570
Accelerated Ageing	168Hrs. at 150°C	ASTM D2671
Tensile Strength	8 N/mm ² (Min.)	ASTM D638
Elongation	250% (Min.)	ASTM D638
Low Temp. Flexibility (-40°C for 4 Hrs.)	No Cracking	ASTM D2671
Shrink Temperature	125°C	IEC 216
Continuous Operating Temp.	-40°C to 105°C	IEC 216
Volume Resistance	1x10 ¹⁴ Ohm.cm (Min.)	ASTM D257
Di-electric Strength	15 kV/mm (Min.)	ASTM D149

Selection Chart

Product Code	Supplied I.D. (mm)	Recovered I.D. (mm)	Recovered Thick. (mm)	Length (Mtr.)
Medium Wall				
ANT 25/8	25	8	2.5	25
ANT 35/12	35	12	2.7	25
ANT 42/16	45	16	3.0	25
ANT 55/20	55	20	3.0	25
ANT 65/25	65	25	3.0	15
ANT 75/28	75	28	3.0	15
ANT 100/38	100	38	3.0	15

Product Code	Supplied I.D. (mm)	Recovered I.D. (mm)	Recovered Thick. (mm)	Length (Mtr.)
Heavy Wall				
ANT-HW 25/8	25	8	5.0	1.5
ANT-HW 35/12	35	12	5.0	1.5
ANT-HW 42/16	45	16	5.0	1.5
ANT-HW 55/20	55	20	5.0	1.5
ANT-HW 65/25	65	25	5.0	1.5
ANT-HW 85/30	85	38	5.0	1.5
ANT-HW 100/38	100	38	5.0	1.5
ANT-HW 120/45	120	45	5.0	1.5
ANT-HW 140/50	140	50	5.0	1.5