


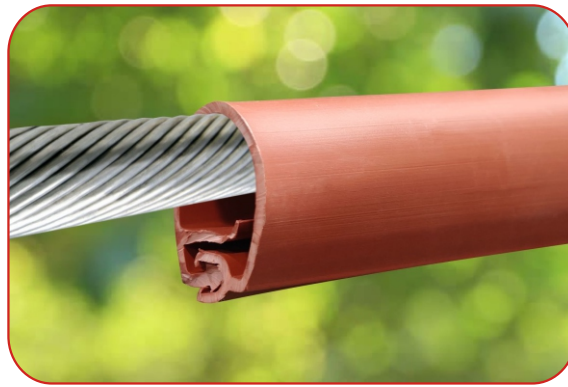

AEX offers Medium Voltage Line Covers (AMVLC), a cutting-edge solution designed to prevent electrical outages caused by trees or wildlife coming into contact with distribution lines. Our AMVLCs are engineered to insulate existing bare lines without the need for costly conductor replacements or additional line hardware.

Selective application of our AMVLC covers on problematic spans, ensures efficient deployment tailored to your needs. Leveraging AEX's extensive experience with medium voltage products in harsh environments, our AMVLCs are formulated with UV-stable, tracking, and erosion-resistant materials, guaranteeing reliability and longevity.

Our specialized tool, facilitates fast and reliable application directly onto overhead conductors.

With Four available sizes covering conductors ranging from 16 mm² to 800 mm², our AMVLCs accommodate various distribution line configurations. Backed by over 15 years of field-proven experience with high-voltage products, AEX International Engineering Works Pvt. Ltd. guarantees unmatched quality and performance in every AMVLC installation.

Additionally, we offer a mastic-sealed version of the product for 36 kV applications, further enhancing reliability and protection. Compliant with REACH and RoHS standards, our AMVLCs demonstrate our commitment to environmental sustainability and regulatory compliance.


Selection Chart

Product Code	Conductor Size Upto (Sq. mm)	Conductor Dia. Upto (mm)	Voltage Class kV	Spool Length (Mtr.) (Min.)
AMVLC-1	185	15	15	25
AMVLC-1 S	185	15	36	25
AMVLC-2	300	22	15	25
AMVLC-2 S	300	22	36	25
AMVLC-3	400	28	15	25
AMVLC-3 S	400	28	36	25
AMVLC-4	800	38	15	25
AMVLC-4 S	800	38	36	25


S - Sealant mastic coated version for 36 kV

KEY FEATURES AND BENEFITS:


- High Dielectric strength.
- Exceptional insulation and long-term reliability.
- Excellent mechanical strength and impact resistance.
- Halogen-free and Non-tracking.
- UV and weather-resistant.
- A mastic sealed version of this series available for 36 kV.




AMVLC-1



AMVLC-2



AMVLC-3



AMVLC-4

Technical Properties

Test Description	Typical Value	Test Method
Tensile Strength	8 MPa (Min.)	ASTM D638
Elongation	200% (Min.)	ASTM D638
Abrasion Resistance	20% Max. Thickness loss	1000 Cycles, 2068g
Low Temp. Impact (-40°C for 4 hrs)	No Cracking at -20°C	ASTM D746
Di-electric Strength at 1.27mm	217 kV/cm. (min.)	ASTM D149
AC Dry Withstand / 1 Min.	15 / 36 kV (min.)	ASTM D149
Tracking and Erosion Resistance (initiate at 2.5 kV)	No Tracking or Erosion to top surface or flame failure after 200 minutes	ASTM D2303