
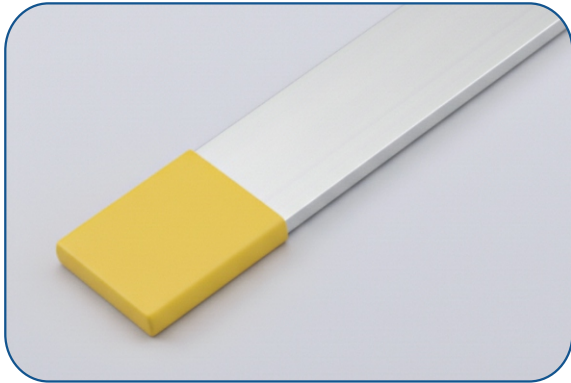


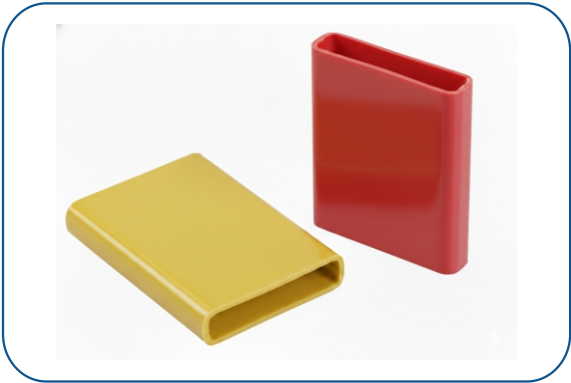

Bus bar Insulation Caps are cold-applied flexible electrical insulating Caps used for sealing and insulating exposed bus bar ends in power and electrical distribution panels. These Caps cover the ends of live Bus bars. These pliable Caps can be installed, removed or replaced in few minutes. The Caps are designed to protect and insulate energized bus bars from flash-overs due to accidental contact.

Made from high-quality Polyvinyl Chloride (PVC) material, to provide excellent electrical insulation and to withstand higher operating temperature continuously.

KEY FEATURES AND BENEFITS:

- High Di-electric strength
- Excellent electrical & thermal properties and high mechanical strength
- Provides a significant reduction in air clearances.
- Resistance to weathering, UV rays, Chemicals and Solvents.
- Suitable for indoor and limited outdoor applications up to 36 kV.
- Provides flash-over protection on Tee, Elbow and Straight connections
- Adaptable to different busbar configurations and installation requirements.
- Operating temperature level up to 105°C.
- Easy to install and remove for inspection and maintenance.
- Prevents Busbar from chemical corrosion affected by strong acid, alkali, salt, etc.

Technical Properties		
Test Description	Typical Value	Test Method
Tensile Strength	12 N/mm ² (min.)	ASTM D638
Elongation	350% (min.)	ASTM D638
Water Absorption	0.50% (max.)	ASTM D570
Density	1.2 gm/cm ³	ASTM D792
Hardness	65 +/- 5 Shore A	ASTM D2240
Continuous Operating Temp.	-20°C to +115°C	IEC 216
Di-electric Strength	15 kV/mm. (min.)	ASTM D149
Volume Resistivity	1x10 ¹² Ohm.cm (min.)	ASTM D257